


Series RSB6



4

TERMINAL BLOCKS

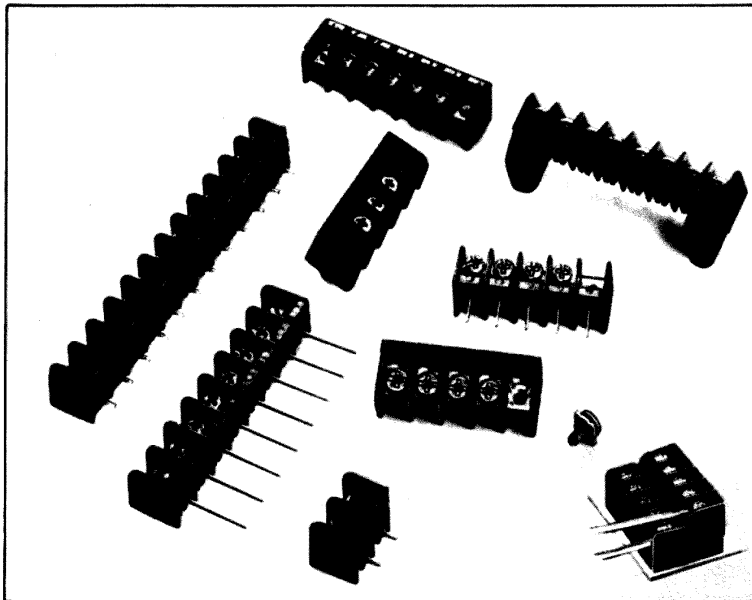

- .375 in. circuit spacing
- Fast wiring – backed-out, wire-ready screws
- Interrupted thread prevents screws from falling out
- Phil-slot screws accept both Phillips and straight screwdrivers
- Multiple bottom terminal styles
- 3-sided circuit isolation protects all circuits from surrounding grounded or live parts
- Flame-retardant Polypropylene insulation
- Optional plug-in socket
- Horizontal and vertical configuration
- Optional high-rise mounting doubles circuit density
- 300V rating
- Strip lengths from 2 to 36 circuits

■ E63810 LR25557

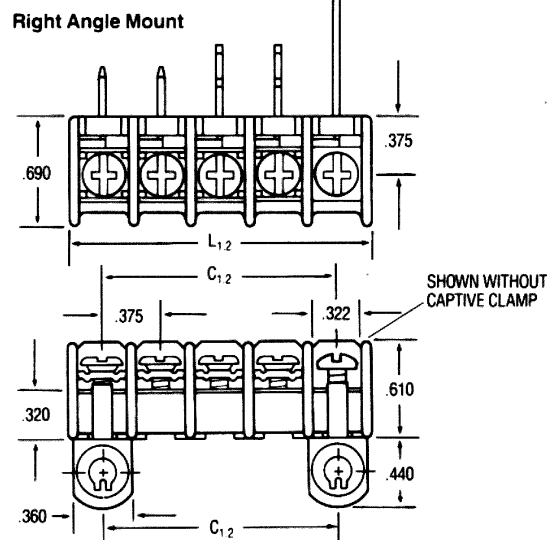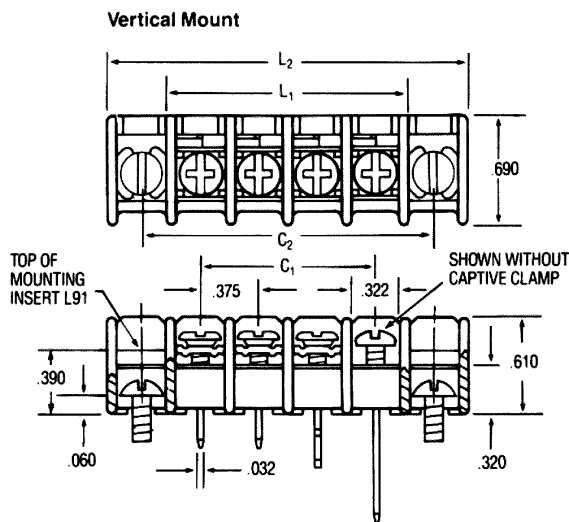

DIMENSIONS (All dimensions in inches)

Computing RSB Block Lengths.

Direct Mounting —
Use C₁ & L₁ for VP, SP, RP, HP
mounting options

End Position Mounting —
Use L₂ & C₂ for VM, SM, RM, VE, SE, RE
mounting options

CKTS. (not positions)	C ₁ in.	L ₁ in.	C ₂ in.	L ₂ in.
01			.75	1.22
02	.37	.84	1.13	1.59
03	.75	1.22	1.50	1.97
04	1.13	1.59	1.88	2.34
05	1.50	1.97	2.25	2.72
06	1.88	2.34	2.63	3.09
07	2.25	2.72	3.00	3.47
08	2.63	3.09	3.37	3.84
09	3.00	3.47	3.75	4.22
10	3.37	3.84	4.13	4.59
11	3.75	4.22	4.50	4.97
12	4.13	4.59	4.88	5.34
13	4.50	4.97	5.25	5.72
14	4.88	5.34	5.63	6.09
15	5.25	5.72	6.00	6.47
16	5.63	6.09	6.38	6.84
17	6.00	6.47	6.75	7.22
18	6.38	6.84	7.13	7.59
19	6.75	7.22	7.50	7.97
20	7.13	7.59	7.88	8.34

CKTS. (not positions)	C ₁ in.	L ₁ in.	C ₂ in.	L ₂ in.
21	7.50	7.97	8.25	8.72
22	7.88	8.34	8.63	9.09
23	8.25	8.72	9.00	9.47
24	8.63	9.09	9.38	9.84
25	9.00	9.47	9.75	10.22
26	9.38	9.84	10.13	10.59
27	9.75	10.22	10.50	10.97
28	10.13	10.59	10.88	11.34
29	10.50	10.97	11.25	11.72
30	10.88	11.34	11.63	12.09
31	11.25	11.72	12.00	12.47
32	11.63	12.09	12.38	12.84
33	12.00	12.47	12.75	13.22
34	12.38	12.84	13.13	13.59
35	12.75	13.22	13.50	13.97
36	13.13	13.59	13.88	14.34