



OUTLINE DIMENSIONS - TYPICAL AVAILABLE MODELS


W6 Series

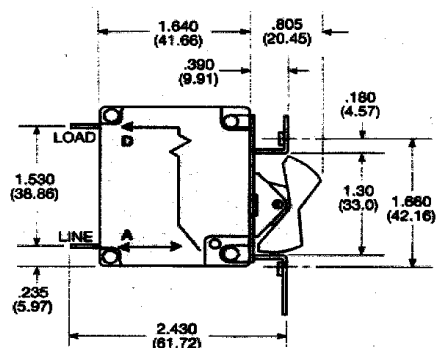


PANEL MOUNTING CUTOUT

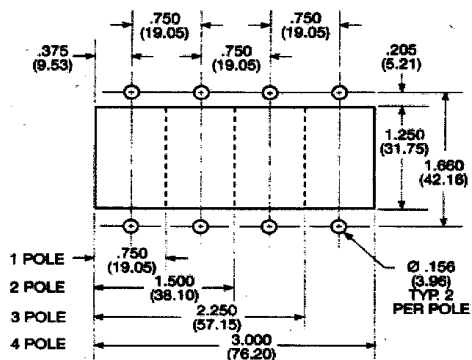


1 POLE



2, 3 & 4 POLE

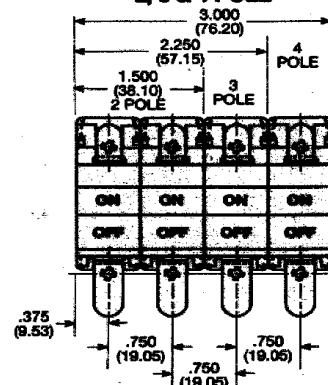

VDE ROCKER MARKING




- Notes:
1. Outline drawing tolerance $\pm .015$ (.38) unless noted. Dimensions in brackets () are in millimeters.
 2. Mounting Detail Tol.: $\pm .005$ (.13) unless noted


OUTLINE DIMENSIONS - Optional Circuit Configurations

W6 Series


RELAY TRIP MODELS

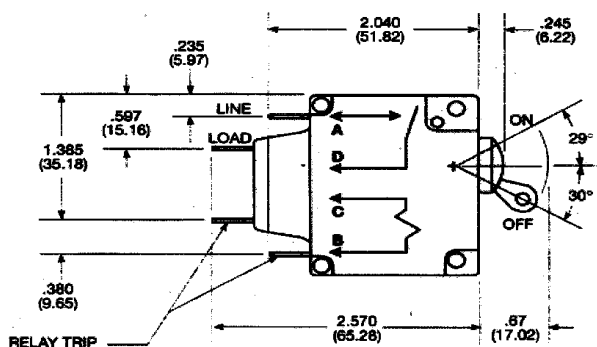


SHUNT TRIP MODELS

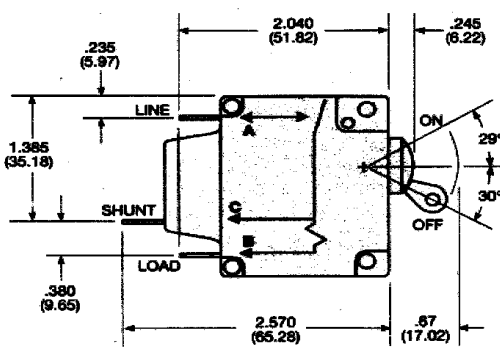

DUAL COIL SHUNT TRIP MODELS

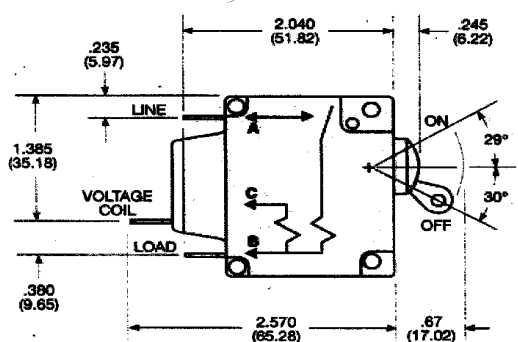

DUAL COIL RELAY TRIP MODELS

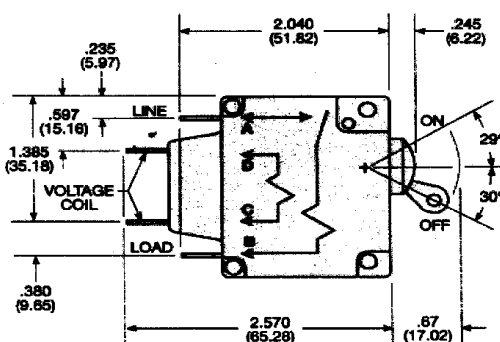

- Notes:
1. The voltage coil on dual coil units is rated for intermittent duty. The voltage coil should be energized no longer than 300 milliseconds.

2. Outline drawing tolerance $\pm .015$ (.38) unless noted. Dimensions in brackets () are in millimeters.