

ORDERING INFORMATION

Typical Part No. >		W	28	-X	Q	1	A	-5
1. DESIGNATOR: W = Circuit breaker								
2. SERIES NUMBER: 28 = Single Pole Fuseholder Type								
3. CIRCUIT FUNCTION: X = Series Trip, Push-to-Reset Button S = Series Trip, Switchable Rocker								
4. TERMINAL TYPE AND MOUNTING: Q = .250" (6.35 mm) Quick Connect will mount in .032"-.062" (.813 mm - 1.574 mm) thick panel. T = .250" (6.35 mm) Quick Connect will mount in .075"-.105" (1.905 mm - 2.667 mm) thick panel. For panel thicknesses other than above, order "Q" type and 55-025B Internal Tooth Push-On Lockwasher.								
5. BEZEL COLOR: 1 = Black with White Rate Marking † 11 = Black with No Rate Marking 2 = Red with Black Rate Marking † 21 = Red with No Rate Marking B = Black with White "Reset" Marked On Bezel (No Rate Marking) †								
6. BUTTON COLOR: A = Black B = Red								
7. AMP RATING: 0.25† 1† 4 7 10 13 16 0.50† 2† 5 8 11 14 20† 0.75† 3 6 9 12 15								


† Not available with Circuit Function "S".

STOCK ITEMS - The following items are normally maintained in stock for immediate delivery.

W28-SQ11A-3	W28-SQ11A-12	W28-XQ1A-0.75	W28-XQ1A-4	W28-XQ1A-8	W28-XT1A-10
W28-SQ11A-5	W28-SQ11A-15	W28-XQ1A-1	W28-XQ1A-5	W28-XQ1A-10	W28-XT1A-12
W28-SQ11A-8	W28-XQ1A-0.25	W28-XQ1A-2	W28-XQ1A-6	W28-XQ1A-12	
W28-SQ11A-10	W28-XQ1A-0.50	W28-XQ1A-3	W28-XQ1A-7	W28-XQ1A-15	

OUTLINE DIMENSIONS


PUSH-TO-RESET TYPE

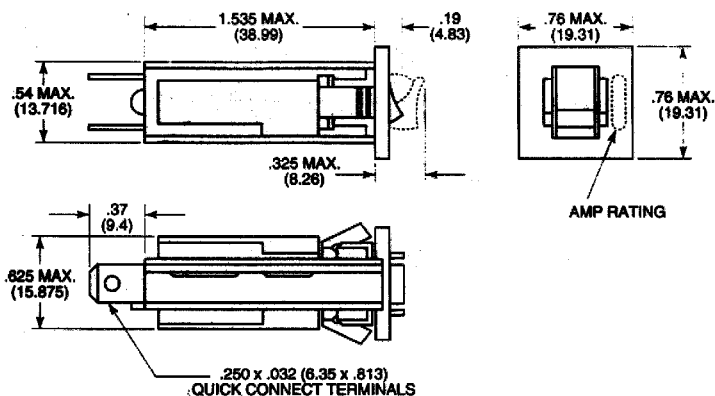

SWITCHABLE TYPE



RECOMMENDED PANEL CUTOUTS

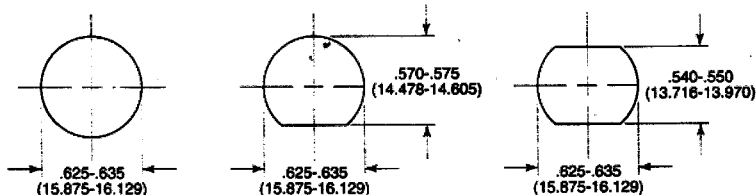

- Note:**
- Soldering to terminals is not recommended.
 - Recommended Panel Thickness: Style Q: .032" - .062" (.813 mm - 1.574 mm)
Style T: .075" - .105" (1.905 mm - 2.667 mm)
 - Internal tooth push-on washer available for panel thickness not covered above.
Part No. 55-025B.