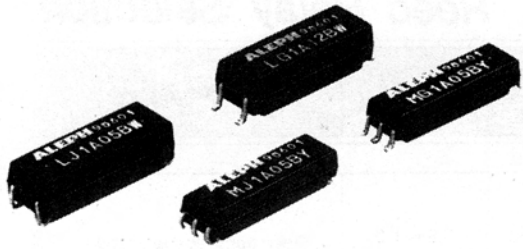






Surface Mount Reed Relays



- True SMT process compatibility
- Ultra miniature size
- Sensitive coil (L series)
- Coaxial E. S. shield for RF (M series)

COIL RATINGS (TAMB. = +20°C)

Part Number	Nominal Voltage (VDC)	Coil Resistance (Ω) \pm 10%	Operate Voltage (VDC) max.	Release Voltage (VDC) min.	Schematics
WJ 1 A □ □ BW WG 1 A □ □ BW	5 12 24	500 1000 2000	3.8 9.0 18.0	0.5 1.0 2.0	
LJ 1 A □ □ BW LG 1 A □ □ BW	5 12	500 1000	3.8 9.0	0.5 1.0	
MJ 1 A □ □ BY MG 1 A □ □ BY	5 12	150 600	3.8 9.0	0.5 1.0	
LJ 1 B □ □ BW LG 1 B □ □ BW	5 12	500 500	3.8 9.0	0.5 1.0	
LJ 1 C □ □ CW LG 1 C □ □ CW	5 12	200 500	3.8 9.0	0.5 1.0	