


● How to order

L J 1 A 0 5 B W

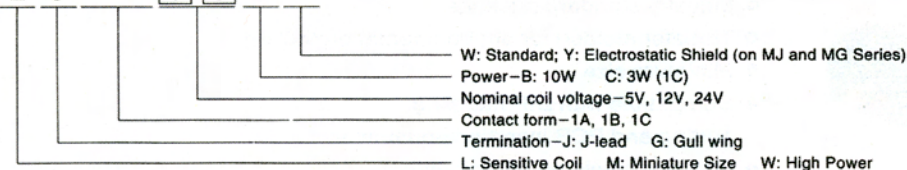

■ CONTRACT RATINGS (resistive loads)

Parameters	L J 1 A ** B W		L G 1 A ** B W		L J 1 C ** C W		W J 1 A ** B W		
	M J 1 A ** B Y	L J 1 B ** B W	M G 1 A ** B Y	L G 1 B ** B W	L G 1 C ** C W		W G 1 A ** B W		
Power (W) max.	10		10		3		50		
Voltage (VDC) max.	150		150		100		200		
Switching Current (A) max.	0.5		0.5		0.25		1.0		
Carry Current (A) max.	1.0		1.0		0.5		2.0		
Contact Resistance (Ω) max. (initial)	0.2		0.2		0.2		0.2		
Breakdown Voltage (VDC) min.	Open Contact	200	200	200	200	200	250	250	
	Contact to Coil	500	500	500	500	500	1500	1500	
Insulation Resistance (Ω) min.	Open Contact	10 <sup>10</sup>	10 <sup>10</sup>	10 <sup>10</sup>	10 <sup>9</sup>	10 <sup>9</sup>	10	10	
	Contact to Coil	10 <sup>10</sup>	10 <sup>10</sup>	10 <sup>10</sup>	10 <sup>9</sup>	10 <sup>9</sup>	10	10	
Operate Time (mS) max. (incl. bounce)	1.0		1.0		2.0		0.5		
Release Time (mS) max.	0.5		0.5		2.5		0.5		
Electrical Life	Low Level	3 X 10 <sup>8</sup> (10mVDC, 10μA)		10 <sup>8</sup> (10mVDC, 10μA)		1 X 10 <sup>7</sup> (10mVDC, 10μA)		1 X 10 <sup>6</sup> (100VDC, 0.5A)	
	Rated Load	8 X 10 <sup>6</sup> (20VDC, 0.5A)		2 X 10 <sup>6</sup> (12VDC, 0.25A)		1 X 10 <sup>6</sup> (100VDC, 0.5A)			

■ DIMENSIONS Unit: mm (inch)

