1565 SERIES - SPDT

6 AMPS

- SPST-NO (1A) and SPDT (1C)
- Rated:
  6 amps at 120 VAC Resistive load
  3 amps at 30 VDC & 240 VAC Resistive load
  1/3 H.P. at 120 VAC
- **Sealed version available 1565S**
- Printed circuit termination
- Standard/stock D.C. coil voltages 6, 12, 24
- Weight .43 oz. (12 grams)

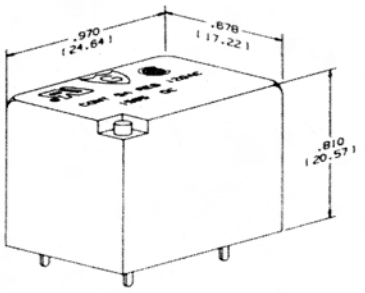

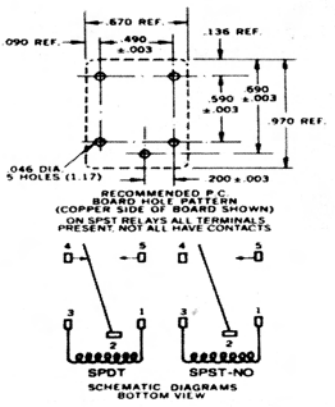

Coil Voltage	Coil Res. Ω	PART NUMBERS			
		Unsealed		Sealed	
		SPST-NO	SPDT	SPST-NO	SPDT
6VDC	45	1565-1A-6D	1565-1C-6D	1565S-1A-6D	1565S-1C-6D
12VDC	180	1565-1A-12D	1565-1C-12D	1565S-1A-12D	1565S-1C-12D
24VDC	720	1565-1A-24D	1565-1C-24D	1565S-1A-24D	1565S-1C-24D

1345 SERIES - SPST & SPDT

10 AMPS

- SPST-NO (1A) and SPDT (1C)
- Rated:
  10 amps at 12 VDC, 120 VAC Resistive load.
  5 amps at 30 VDC, 240 VAC Resistive load.
- **Sealed version 1345S**
- Termination printed circuit
- Standard/stock D.C. coil voltages 12 and 24
- Weight 1.0 oz. (28 grams)

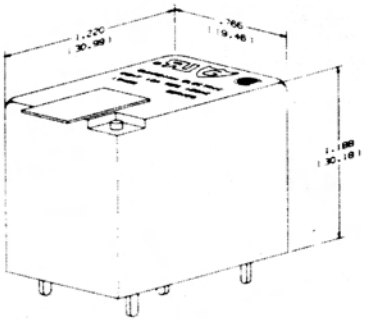

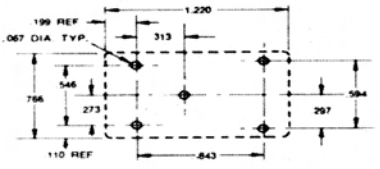



Coil Voltage	Coil Res. Ω	PART NUMBERS			
		Unsealed		Sealed	
		SPST-NO	SPDT	SPST-NO	SPDT
12VDC	1400	1345-1A-12D	1345-1C-12D	1345S-1A-12D	1345S-1C-12D
24VDC	5600	1345-1A-24D	1345-1C-24D	1345S-1A-24D	1345S-1C-24D

1390/1395 SERIES - DPDT

13 AMPS

- DPDT (2C)
- Rated:
  13 amps at 30 VDC, 120/240 VAC
  Resistive load. 1/3 H.P. at 120/240 VAC
- **Sealed versions 1390VS, 1390PVS, 1395VS, 1395PVS**
- Plug in/solder lug terminals 1390, 1395
- Printed circuit terminals 1390P, 1395P
- Standard/stock A.C. coil voltages 12, 24, 120
- Standard/stock D.C. coil voltages 12, 24, 110
- Sockets available
- Flange mount cover available
- Weight 1.52 oz. (43 grams)





CIRCUIT DIAGRAM



Coil Voltage	Coil Res. Ω	PART NUMBERS			
		Plug In		P.C.	
		Unsealed	Sealed	Unsealed	Sealed
12VAC	45	1390-2C-12A	1390VS-2C-12A	1390P-2C-12A	1390PVS-2C-12A
24VAC	160	1390-2C-24A	1390VS-2C-24A	1390P-2C-24A	1390PVS-2C-24A
120VAC	3900	1390-2C-120A	1390VS-2C-120A	1390P-2C-120A	1390PVS-2C-120A
12VDC	160	1395-2C-12D	1395VS-2C-12D	1395P-2C-12D	1395PVS-2C-12D
24VDC	650	1395-2C-24D	1395VS-2C-24D	1395P-2C-24D	1395PVS-2C-24D
110VDC	11000	1395-2C-110D	1395VS-2C-110D	1395P-2C-110D	1395PVS-2C-110D

1735 Series-SPST

30 AMPS

- SPST-NO (1A)
- Rated: 30 AMPS at 240VAC
  TV 15 at 120VAC
- .250" Q.C. Terminals 1735Q
- Printed Circuit Terminals 1735P
- Standard Stock D.C. Coil Voltages 6, 12 & 24
- Flange mount cover

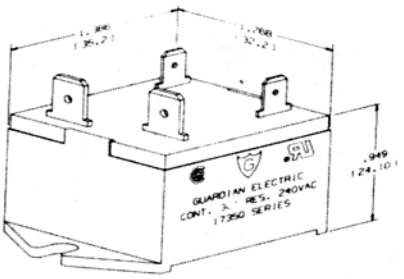



CIRCUIT DIAGRAM



Coil Voltage	Coil Res.	PART NUMBERS	
		P.C	Q.C.
6VDC	30	1735P-1A-6D	1735Q-1A-6D
12VDC	120	1735P-1A-12D	1735Q-1A-12D
24VDC	480	1735P-1A-24D	1735Q-1A-24D

Toll Free 1-800-526-5376 • 201-337-1000 • Fax 201-337-1862