1495 SERIES - DPDT

2 AMPS

- DPDT (2C) crossbar
- Rated: 2 amps at 120 VAC Resistive load.
  1 amp at 30 VDC/120 VAC Resistive load
- **Sealed version 1495S**
- Printed circuit termination on .100" grid
- Standard/stock DC coil voltages 5, 6, 12, 24
- Meets FCC part 68 1500 volt surge test
- Weight .18 oz. (5 grams)

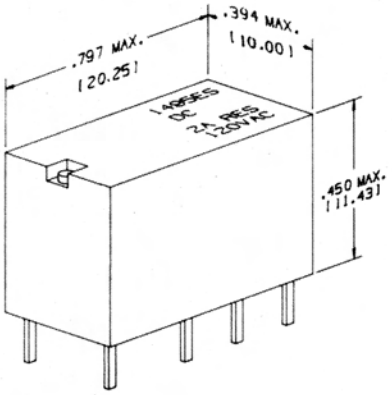

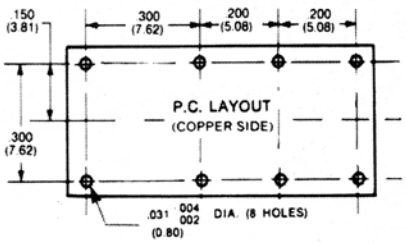

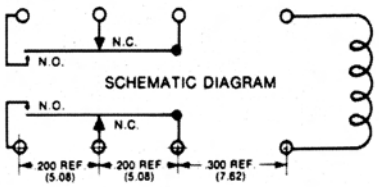

Coil Voltage	Coil Res. Ω	PART NUMBERS	
		Unsealed	Sealed
5VDC	36	1495-2C-5D	1495S-2C-5D
6VDC	70	1495-2C-6D	1495S-2C-6D
12VDC	280	1495-2C-12D	1495S-2C-12D
24VDC	1050	1495-2C-24D	1495S-2C-24D

1675 SERIES - SPDT

5 AMPS

- SPDT (1C)
- Rated: 5 amps at 30 VDC and 240 VAC Resistive load. 1/10 H.P. 120 VAC
- **Sealed version 1675S**
- Printed circuit termination
- Standard/stock DC coil voltages 5, 6, 12, 24
- Weight .27 oz. (8 grams)

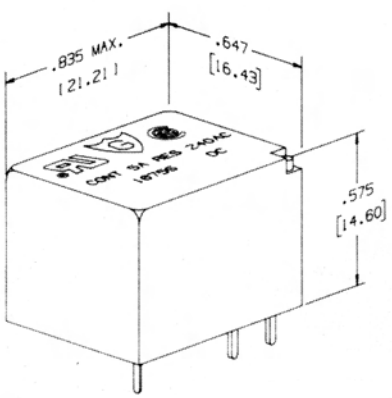





SCHEMATIC DIAGRAM

Coil Voltage	Coil Res. Ω	PART NUMBERS	
		Unsealed	Sealed
5VDC	56	1675-1C-5D	1675S-1C-5D
6VDC	80	1675-1C-6D	1675S-1C-6D
12VDC	320	1675-1C-12D	1675S-1C-12D
24VDC	1280	1675-1C-24D	1675S-1C-24D

Toll Free 1-800-526-5376 • 201-337-1000 • Fax 201-337-1862