LY

General Purpose Relay

Dimensions [Unit: mm (inch)]

LY4F

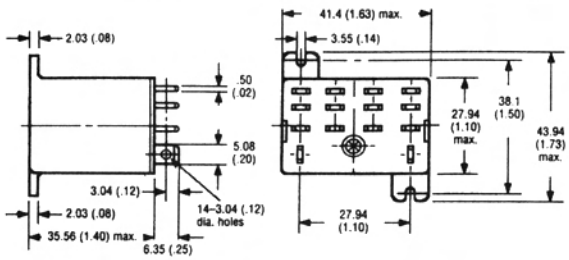

Mounting holes



LY1-0, LY2-0, LY3-0, LY4-0

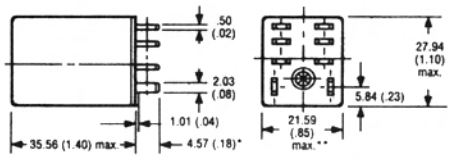

Note: 1. * The above dimension applies to LY2-0. For LY1-0, this dimension is .25 (6.35)*.
2. ** The above dimension applies to LY1-0 and LY2-0. For LY3-0 and LY4-0, refer to LY3 and LY4 dimensions above.

Mounting holes (bottom view)

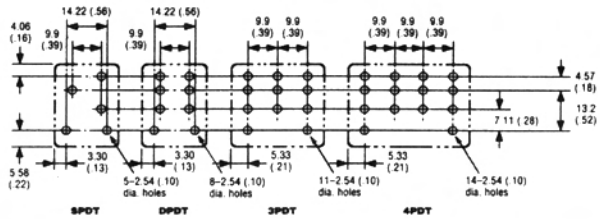

LY1F and LY2F

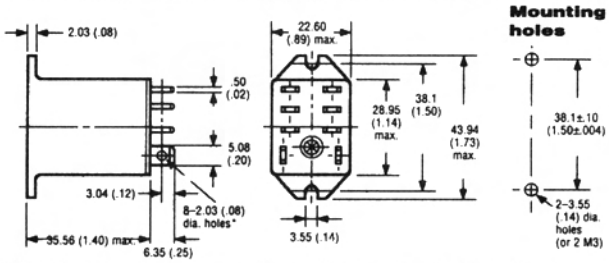

Mounting holes

Note: * The above dimension applies to LY1F. For LY2F, this dimension is 8-.12 dia. holes.

LY2N

Terminal arrangement (bottom view)

DC coil rating type



AC coil rating type



With the LED indicator type, the rated current is approximately 0 to 5.0mA higher than the Standard Type. The coil terminals 10 and 11 of Type LY3N become (-) and (+) and terminals 13 and 14 of Type LY4N become (-) and (+), respectively.

LY212N

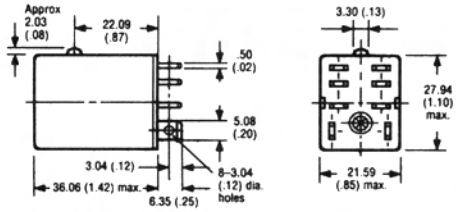

Terminal arrangement (bottom view)

DC coil rating type



AC coil rating type



LY412N

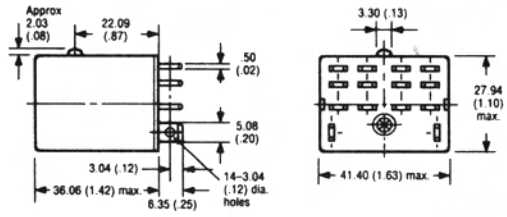

Terminal arrangement (bottom view)

DC coil rating type



AC coil rating type



www.relayspec.com
RELAY SPECIALTIES A world of components
sales@relayspec.com