

7 RELAYS


ORDERING INFORMATION

Typical Part Number >		T75	S	5	D	1	1	2	-12
1. BASIC SERIES: T75 = Low profile, printed circuit board relay.									
2. ENCLOSURE: S = Immersion cleanable, plastic sealed case.									
3. CONTACT ARRANGEMENT: 1 = 1 Form A (SPST-NO) 5 = 1 Form C (SPDT)									
4. COIL INPUT: D = DC voltage									
5. COIL CONFIGURATION: 1 = Single coil, non-latching (monostable)									
6. MOUNTING AND TERMINALS: 1 = Printed circuit terminals									
7. CONTACT MATERIAL: 2 = Silver-cadmium oxide (AgCdO)									
8. COIL VOLTAGE:									
03 = 3VDC	06 = 6VDC	12 = 12VDC	24 = 24VDC	48 = 48VDC					
05 = 5VDC	09 = 9VDC	18 = 18VDC	36 = 36VDC	60 = 60VDC					

STOCK ITEMS - The following items are normally maintained in stock for immediate delivery


- T75S5D112-05
- T75S5D112-12
- T75S5D112-24
- T75S5D112-48

OUTLINE DIMENSIONS

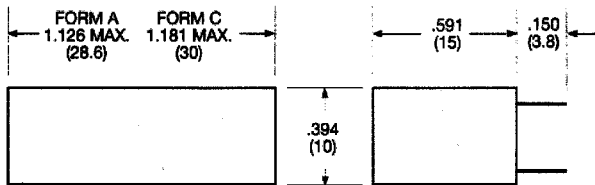


CONTACT TERMINALS: .023 x .040 (.58 x 1.02) REF.
 COIL TERMINALS: .024 (.61) DIA. REF.

WIRING DIAGRAMS (Bottom Views)




* ON SINGLE THROW MODELS, ONLY NECESSARY TERMINALS ARE PRESENT.

PC BOARD LAYOUTS (Bottom Views)

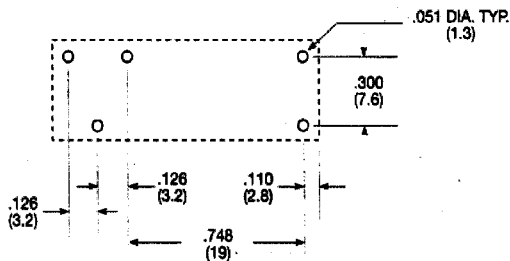

1 FORM C

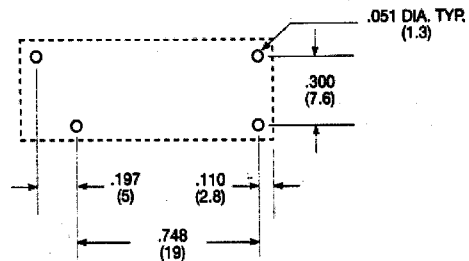

1 FORM A