


**SOCKETS FOR KU SERIES RELAYS THROUGH 3 POLES (Continued)**


**27E121  
SCREW TERMINAL SOCKET**

The 27E121 socket offers screw termination for KUEP, KUGP, KUIP, KUL, KUMP and KUP relays, through 3 poles, with .187" (4.75 mm) quick connect terminals. This socket stacks on 1.700" (43.18 mm) centers. When surface mounting, two #6-32 screws of suitable length are required. When track mounting, two 24A071 retainer clips (not shown) are required. The 27E121 is rated 15 amps and is UL recognized, File E59244, CSA certified, File LR15734.

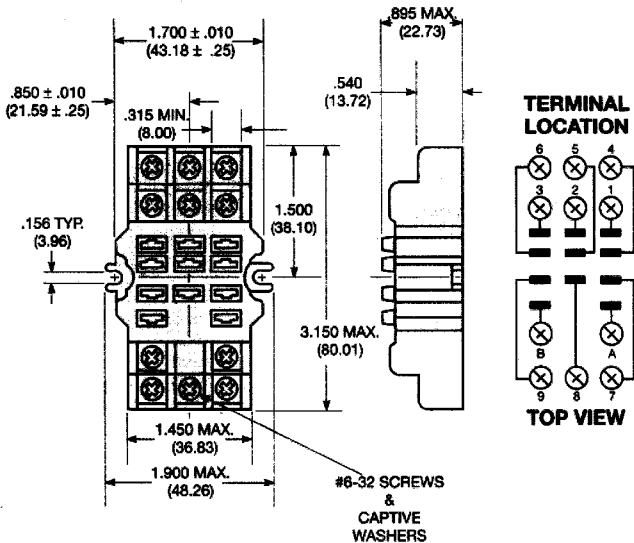

**27E893  
SCREW TERMINAL, DIN RAIL SNAP-MOUNT SOCKET  
(use with mounting track 24A110)**

The 27E893 DIN rail, snap-mount socket offers screw termination for KUEP, KUGP, KUIP, KUL, KUMP and KUP relays, through 3 poles, with .187" (4.75 mm) quick connect terminals. This socket is constructed with a spring-loaded latch which allows it to be quickly snapped onto or removed from a "top hat" style mounting track. No special tools or extra hardware is required for installation. The 27E893 is UL rated 15 amps, 94V-0, File E59244 and CSA rated 10 amps, File LR15734. Two 20C317 hold-down spring anchor clips are packaged with each socket.

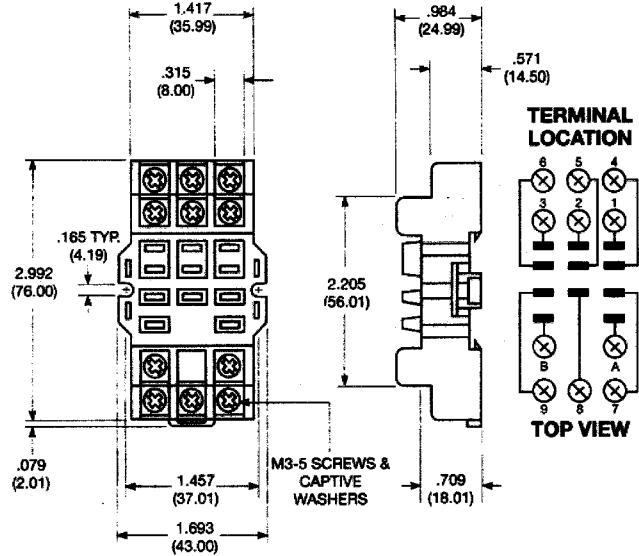

**SOCKETS FOR KU SERIES 4 POLE RELAYS**

**SOCKET SELECTION TABLE  
Stock items are boldfaced.**

For 4 pole KUP relays with .110" (2.79 mm) quick connect termination.


SOCKET	SOCKET TERMINATION	HOLD-DOWN SPRING
27E415	.187" (4.75 mm) quick connect	20C228 or 20C254
27E419	PC board	20C228 or 20C254
27E867*	Screw terminals	20C254

\* Use 40G432 insulator pad or customer supplied alternative


**HARD MOUNT SOCKETS FOR 4 POLE RELAYS**

27E415—with .187" (4.75 mm) quick connect/solder terminals.  
27E419—with printed circuit terminals. See PC board layout at right.

**Note:** Only 4 pole KUP relays with .110" (2.79 mm) quick connect terminals can be used with 4 pole hard mount sockets.

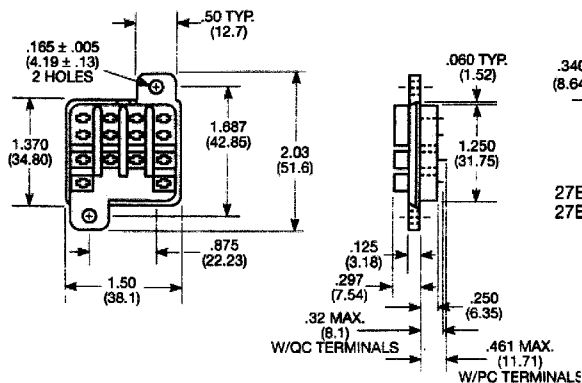

**SUGGESTED SOCKET  
PC BOARD LAYOUT**



27E415 uses same chassis cutout as 27E043.

**SCREW TERMINAL SOCKET  
FOR 4 POLE RELAYS**

27E867 offers screw termination for 4 pole KUP relays with .110" (2.79 mm) quick connect/socket mount terminals. Rated 10 amps and is UL recognized, File E59244.

