NO. 26 - U-FRAME - AC & DC

- Uniguard II bobbin and coil cover
- .187" Quick connect lugs
- Standard/stock AC voltage 120
- Standard/stock DC voltage 12, 24
- Class "A" insulation system
- Stroke length 0 - 3/4"
- Plunger weight .5 oz. (14 grams)
- Total weight 3.15 oz. (89 grams)

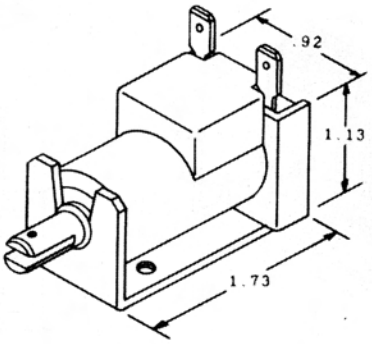

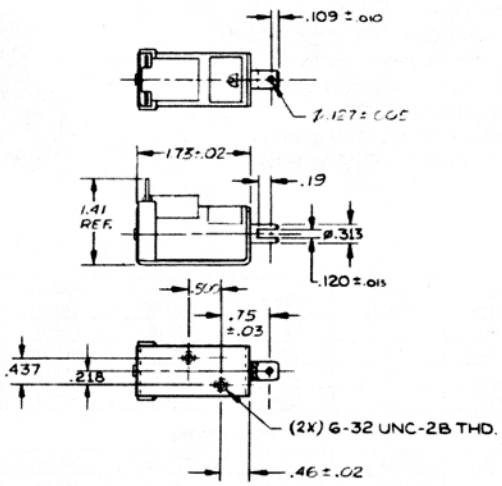

Coil Voltage	Coil Res. Ω	Duty	Pull at 1/8"	Holding Force	PART NUMBERS
120VAC	140	Int.	20 oz.	31 oz.	26-I-120A
120VAC	412	Cont.	14 oz.	17 oz.	26-C-120A
12VDC	10.7	Int.	22 oz.	77 oz.	26-I-12D
12VDC	26.7	Cont.	11 oz.	57 oz.	26-C-12D
24VDC	41.5	Int.	22 oz.	77 oz.	26-I-24D
24VDC	104	Cont.	11 oz.	57 oz.	26-C-24D

NO. 28 - BOX FRAME - AC & DC

- Uniguard II bobbin and coil cover
- .187" Quick connect lugs
- Push type available specify 28P
- Standard/stock AC voltage 24, 120
- Standard/stock DC voltage 6, 12, & 24
- Class "A" insulation system
- Stroke length 0 - 1/2"
- Plunger weight .46 oz. (13 grams)
- Total weight 3.5 oz. (100 grams)



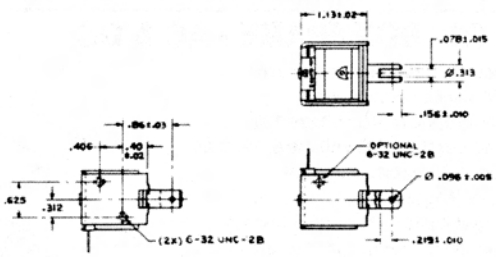

Coil Voltage	Coil Res. Ω	Duty	Pull at 1/8"	Holding Force	PART NUMBERS
24VAC	7.5	Int.	18 oz.	21 oz.	28-I-24A
24VAC	17.4	Cont.	11 oz.	14 oz.	28-C-24A
120VAC	220	Int.	18 oz.	21 oz.	28-I-120A
120VAC	410	Cont.	11 oz.	14 oz.	28-C-120A
6VDC	3.0	Int.	25 oz.	90 oz.	28-I-6D
6VDC	7.5	Cont.	10 oz.	75 oz.	28-C-6D
12VDC	11.9	Int.	25 oz.	90 oz.	28-I-12D
12VDC	29.8	Cont.	10 oz.	75 oz.	28-C-12D
24VDC	47.4	Int.	25 oz.	90 oz.	28-I-24D
24VDC	116	Cont.	10 oz.	75 oz.	28-C-24D

PUSH TYPE

Coil Voltage	Coil Res. Ω	Duty	Push at 1/8"	Holding Force	PART NUMBERS
24VAC	7.5	Int.	16 oz.	19 oz.	28P-I-24A
24VAC	17.4	Cont.	10 oz.	12 oz.	28P-C-24A
120VAC	220	Int.	16 oz.	19 oz.	28P-I-120A
120VAC	410	Cont.	10 oz.	12 oz.	28P-C-120A
6VDC	3.0	Int.	23 oz.	81 oz.	28P-I-6D
6VDC	7.5	Cont.	10 oz.	67 oz.	28P-C-6D
12VDC	11.9	Int.	23 oz.	81 oz.	28P-I-12D
12VDC	29.8	Cont.	10 oz.	67 oz.	28P-C-12D
24VDC	47.4	Int.	23 oz.	81 oz.	28P-I-24D
24VDC	116	Cont.	10 oz.	67 oz.	28P-C-24D

NO. 28HD - BOX FRAME - AC & DC

- Heavy duty construction
- Uniguard II bobbin and coil cover
- .187" Quick connect lugs
- Standard/stock AC voltage 120
- Standard/stock DC voltage 12, 24
- Class "A" insulation system
- Stroke length 0 - 1/2"
- Plunger weight .86 oz. (24 grams)
- Total weight 4.67 oz. (132 grams)

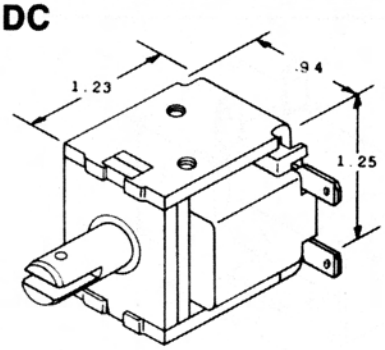

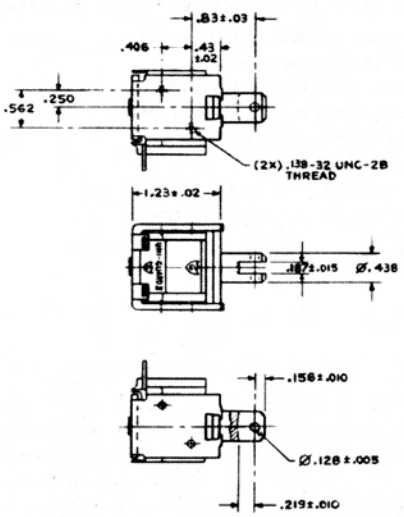

Coil Voltage	Coil Res. Ω	Duty	Pull at 1/8"	Holding Force	PART NUMBERS
120VAC	173	Int.	25 oz.	64 oz.	28HD-I-120A
120VAC	375	Cont.	12 oz.	45 oz.	28HD-C-120A
12VDC	12.2	Int.	26 oz.	160 oz.	28HD-I-12D
12VDC	30.1	Cont.	9 oz.	130 oz.	28HD-C-12D
24VDC	49	Int.	26 oz.	160 oz.	28HD-I-24D
24VDC	119	Cont.	9 oz.	130 oz.	28HD-C-24D