





DIMENSIONS



DELAY SETTINGS

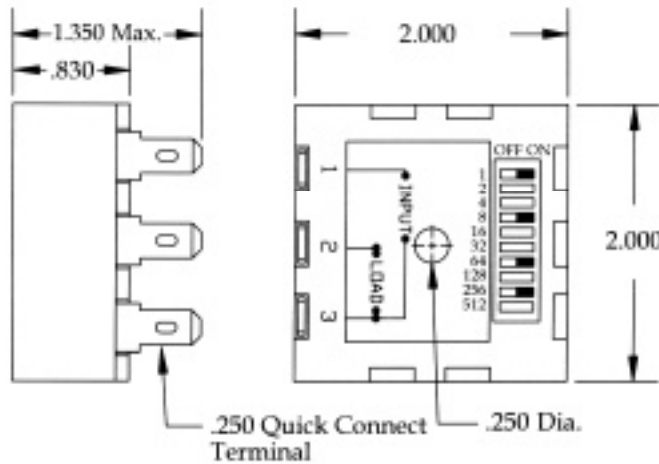

CONNECTION DIAGRAMS

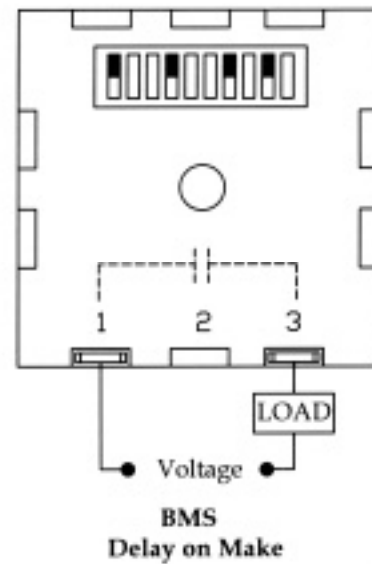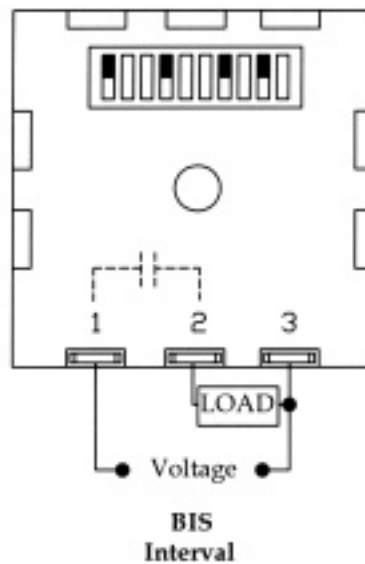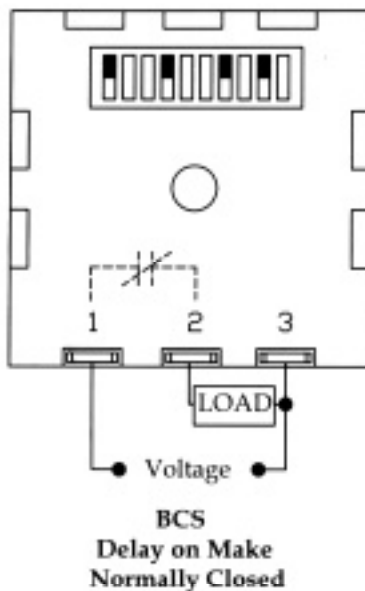

ORDERING INFORMATION

SERIES	INPUT VOLTAGE	DELAY SETTING
BCS	4 - 24 VAC	L - Low Range, .1 to 102.3 Seconds
BIS	5 - 120 VAC	S - Standard Range, 1 to 1023 Seconds
BMS	6 - 230 VAC	H - High Range, 10 to 10230 Seconds