


FEATURES

HERMETICALLY SEALED

OPERATIONAL DESCRIPTION

SUB-MINIATURE RUGGED

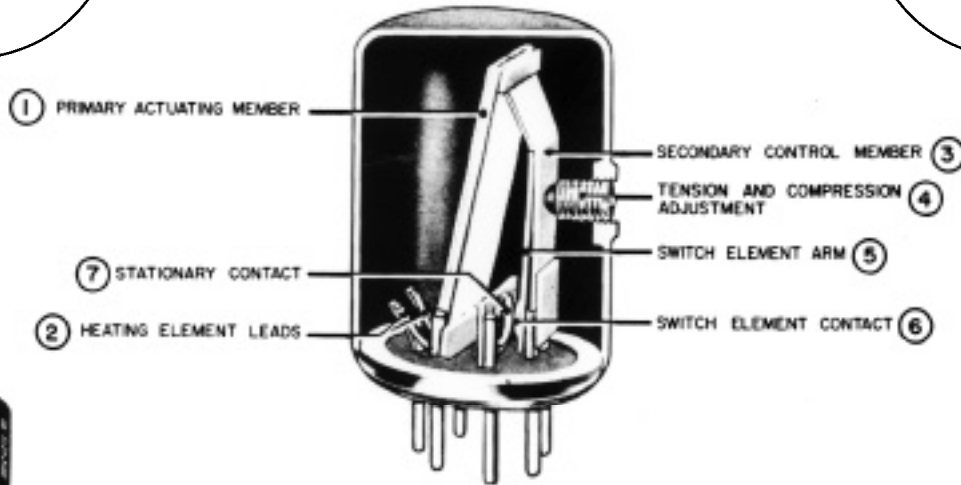


TYPE "FR"




SPECIFICATIONS -

- Time Delay: 1-180 seconds
- Heater Voltages: Up to 150 volts inter changeable on DC or AC of any frequency.
- Heater Power: Approximately 4 watts
- Contacts:
 - Arrangements:
 - SPST - Normally Open, N/C also.
- Vibration: Will exhibit no resonance through-
 - out range of 5-1000 CPS at 10 G's.
- Shock: Will withstand shock upto 50 G's.
- Weight: Less than 1 oz.
- Terminals: Seven-pin miniature plug-in, or solder terminals for flange mount.
- Hermetic Seal: Will withstand pressure equal to 3.264×10^{-1} in. Hg.




TYPE "PR"




SCALE FULL

HEADER CONNECTION



1 NORMALLY OPEN



1 NORMALLY CLOSED

NOTE: CAN BE HELD IN PLACE BY THE USE OF A STANDARD SEVEN-PIN MINIATURE TUBE SHIELD J-SLOT TYPE WITH SECURING SPRING.
DO NOT SECURE WITH CLAMPS.

ORDERING DATA

EXAMPLE

FR-10S-NO-28

mounting style

time delay in seconds

contact arrangement

heater voltage