
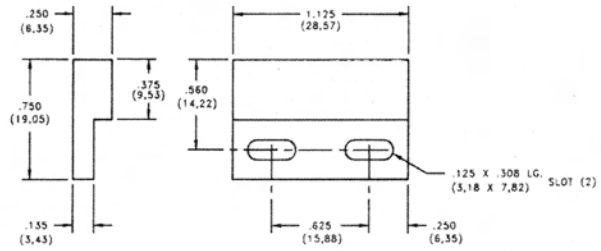
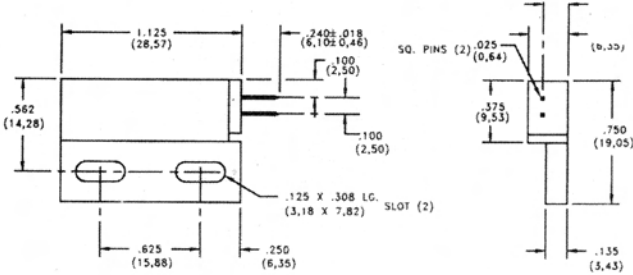



SENSOR 59125 series





ACTUATOR 57125



U.L. File# E61760 (N) ±0.010 (0,25) Tolerance

59135 series

57135

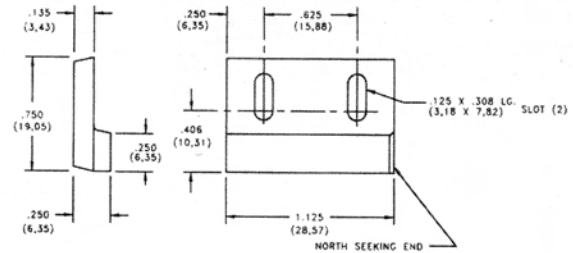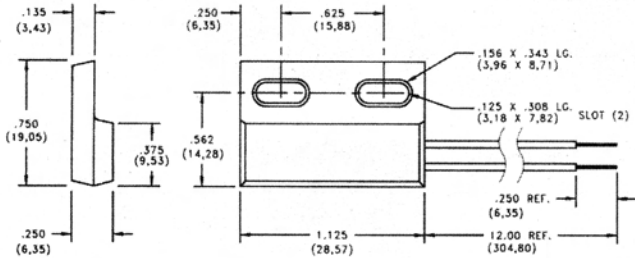

U.L. File# E61760 (N) CSA File# LR64660 ±0.010 (0,25) Tolerance

These notes apply only to sensors shown on this and the following page.

FLYING LEADS: For 59135 are 20AWG, 19x32 teflon insulated, 200°C., 300VDC., UL1180. 59135 flying lead colors: -010 - red; -020 - white; -030 - common - white, normally open - red, normally closed - blue.

FLYING LEADS: For 59140 are 24AWG, 7/32, PVC, 105°C., 300V., UL1430 or UL 1569. 59140 type -030 flying lead colors: common - white, normally open - black, normally closed - blue.

59125 NOTE: 59125 connectors match Molex® SL connector or equivalent. Assembly required.

11 CONTROLS & SENSORS