

Dimensional Drawings

SIDE & BOTTOM VIEW

Diagram showing the side and bottom views of the device. Dimensions include:

- 3.81" (97.0)
- 5.0" (127.0)
- 1.00" (25.4)
- 1/2"-14 NPT 4 1/2" FULL THREADS
- 2.00" (50.8)
- 2.67" (68.0)
- 3.23" (82.0)
- 1/4"-20 THD .38 DEEP (9.5) 4-HOLES
- 1.34" (34.0)
- REMOVABLE COVER
- TRI-COLOR LED INDICATOR

FRONT & REAR VIEW

Diagram showing the front and rear views of the device. Dimensions include:

- 3.75" (94.0) OPTICAL
- 1.41" (36.0)
- LED INDICATOR
- 1/4"-20 THD .56 DEEP (13.9) 1-HOLE
- 4.45" (113.0)
- 30" (7.6)
- 70" (18.0)
- 1/4"-20 THD .27 DEEP (7.0) 2-HOLES
- COVER ATTACHMENT


FRONT VIEW, FIBER OPTIC MODEL

Diagram showing the front view of the Fiber Optic Model. Dimensions include:


- .45" (11.4)
- 1.41" (36.0mm)
- 8-6T SCREWS FOR RETAINING FIBER OPTIC CABLES

* Refer to Accessories
** See chart


RELAY OUTPUT/AC POWER




RELAY/TRANSISTOR (PNP)
OUTPUT/DC POWER

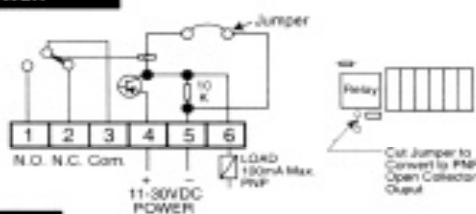

**TRANSISTOR
OUTPUT (NPN)**

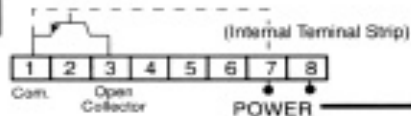


TRIAC OUTPUT



POWER INPUT:



FRONT & REAR VIEW

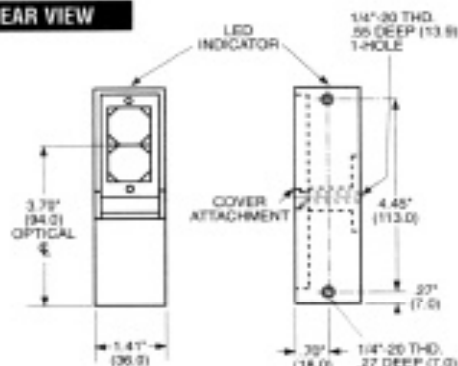

**FRONT VIEW,
FIBER OPTIC MODEL**

