TINY-MITE INDICATOR LIGHT ASSEMBLIES

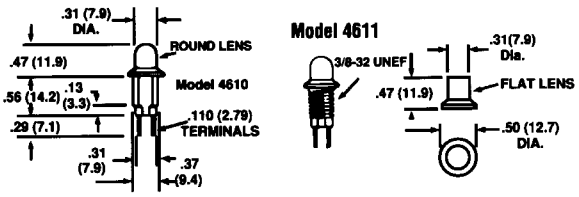

Ordering Information: Complete assembly consists of socket, lens and lamp. Each sold separately. **Mounting:** No. 4610 (without thread) supplied with push-on speednut - can be keyed to prevent rotation. No. 4611 (threaded) supplied with zinc finish hex nut and internal tooth lockwasher. **Lens:** Polycarbonate. **Bezel:** Polished stainless steel. **Socket:** Black nylon.

SOCKETS

Mfr. No.	Description
4610	Unthreaded
4611	Threaded

SUB-MINIATURE WEDGE-BASE LAMPS

Mfr. No.	Design Voltage	Amps	Candle Power (Approx.)	Rated Life Hours
56	5.0	.115	.15	20,000
84	6.3	.040	.03	20,000
86	6.3	.200	.40	20,000
18	14.0	.040	.13	5,000
73	14.0	.080	.30	15,000
85	28.0	.040	.30	7,000
17	28.0	.060	.65	5,000

LENSES

Mfr. No.		
Round Lens	Flat Lens	Color
4621	4631	Red
4623	4633	Amber
4625	4635	Green
4626	4636	Blue
4627	4637	Yellow

OIL-TIGHT SERIES 6000



- Fully gasketed construction
- Meets NEMA specification ICS1-110.60
- Neon models come with built-in current limiting resistor. LED models come with built-in current limiting resistor and a rectifier diode.

Mounting: Supplied with internal tooth lockwasher and hex nut; requires .38″ min. dia. hole. **Wire Leads:** No. 22 AWG (105°C), 4.4-4.8″ long stripped .43-.47″. **Lens:** Polycarbonate. **Bezel:** Stainless steel. **Gaskets:** Buna-N. **Housing:** Black nylon.

Mfr. No.	Volts	Color
Solid State Lamps		
6091M1-12V	12	Red
6091M5-12V	12	Green
6091M7-12V	12	Yellow
6091M1-24V	24	Red
6091M5-24V	24	Green
6091M7-24V	24	Yellow
Neon Lamps		
6010M1	125	Red
6010M3	125	Amber
6012M5	125	Green*
6011M1	250	Red
6011M3	250	Amber
6013M5	250	Green*

* Incorporates G2B lamp and resistor.

RECTANGULAR NEON PILOT LIGHTS



Series 2300 will snap-fit into .032-.100″ thick panels without a speednut and into other thicknesses with a speednut. Mounting hole: 1.276-1.281″×.395-.400″.

Mfr. No.	Color	VAC
2330QD1*	Red	120
2330QD3*	Amber	120
2332QD5*‡	Green	120
2330D1†	Red	120
2330D3†	Amber	120
2332D5†‡	Green	120

* With .250″ tinned brass terminals. † With 4.4-4.8″long wire leads, stripped .43-.57″. Speed nuts sold separately. ‡ Incorporates G2B lamp with resistor.

INCANDESCENT AND SOLID STATE INDICATORS



Series 1091M

Series 1091M is solid state, complete with built-in current limiting resistor and rectifier diode. For solid state lens colors, insert 1-Red, 5-Green, 7-Yellow, for ″*″ in the stock number.

Solid State Indicators

Mfr. No.	Volts
1091M*-12V	12
1091M*-24V	24
1091M*-125VAC	105-125VAC

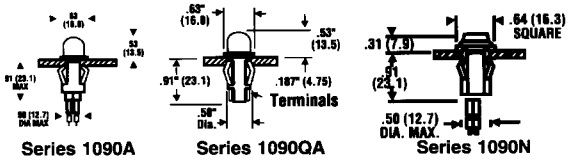

Series 1090A Series 1090QA Series 1090N

Series 1090 are incandescent and are available in 6,12, or 28 volt types. For incandescent lens colors, insert 1-Red, 5-Green, 7-Yellow, 4-White, for ″*″ in the stock number.

Mfr. No.	Volts
Incandescent Indicators with Dome Lenses	
1090A*-12V	12
1090A*-28V	28
1090QA*-12V	12
1090QA*-28V	28
Incandescent Indicators with Square Lenses	
1090N*-12V	12
1090N*-28V	28

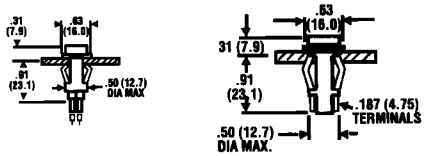

Series 1090C Series 1090QC

Incandescent Indicators with High-Hat Lenses

Mfr. No.	Volts
1090C*-12V	12
1090C*-28V	28
1090QC*12V	12
1090QC*28V	28

* 125 VAC supplied with 6″ white wire, stripped ½″ with external 3.9K ½ watt resistor attached to one lead, covered with shrink tubing insulation.