DESCRETE WIRE LEAD LEDs

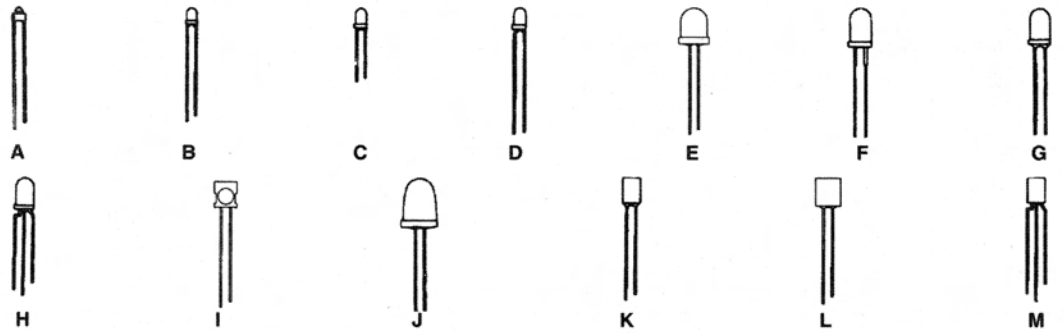

Mfr. No.	Color	View. Angle	Iv/ mA	λ p (nm)
T-2 mm Short Profile, Diffused Lens (Fig. A)				
SSL-LX20333ID	Red	70°	32/20	635
SSL-LX20333GD	Green	70°	6/20	565
SSL-LX20333YD	Yellow	70°	6/20	585
SSL-LX20333SRD	S. Red	70°	50/20	660
SSL-LX20333SRC†	S. Red	30°	120/20	660
T-3 mm Short Profile, Low Current, Diffused Lens (Fig. B)				
SSL-LX3044LID	Red	65°	3/2	635
SSL-LX3044LGD	Green	65°	2/2	565
SSL-LX3044LYD	Yellow	65°	2/2	585
SSL-LX3044SRD	S. Red	65°	10/2	660
SSL-LX3044SRC/B†	S. Red	45°	20/2	660
T-3 mm Low Cost Package, Diffused Lens (Fig. C)				
SSL-LX3052HD	S. Red	60°	4/20	700
SSL-LX3052ID	Red	60°	8/20	635
SSL-LX3052GD	Green	60°	6/20	565
SSL-LX3052YD	Yellow	60°	8/20	585
T-3 mm Standard Size Lens, Diffused Lens (Fig. D)				
SSL-LX3054ID	Red	80°	20/20	635
SSL-LX3054GD	Green	80°	12/20	565
SSL-LX3054YD	Yellow	80°	10/20	585
SSL-LX3054SRD	S. Red	80°	40/20	660
SSL-LX3054SBD	Blue	80°	20/20	470
T-3 Super Bright, Clear Lens (Fig. B)				
SSL-LX3044SRC/E	S. Red	50°	1000/20	660
SSL-LX3044SGC	Green	50°	300/20	580
SSL-LX3044SYC	Yellow	50°	400/20	590
T-3 Bi-Color Units, Diffused Lens (Fig. B)				
SSL-LX3044IGW	Red/Grn.	.....	30/20	635/565
SSL-LX3044YGW	Yel./Grn.	.....	30/20	585/565
T-5 Low Cost Units, Diffused Lens (Fig. F)				
SSL-LX5091HD	S. Red	70°	6/20	695
SSL-LX5091GD	Green	70°	10/20	565
SSL-LX5091YD	Yellow	70°	10/20	585
T-5 Standard Size, Diffused Lens (Fig. G)				
SSL-LX5093SBD	Blue	70°	30/20	470
SSL-LX5093ID	Red	70°	60/20	635
SSL-LX5093GD	Green	70°	30/20	565
SSL-LX5093YD	Yellow	70°	30/20	585
SSL-LX5093SRD	S. Red	70°	150/20	660
SSL-LX5093IGW	Red/Grn.	70°	30/20	635/565
T-5 Standard Size Super Bright, Clear Lens (Fig. G)				
SSL-LX5093SRC/E	S. Red	30°	2000/20	660
SSL-LX5093SGC/B	Green	30°	400/20	565
SSL-LX5093SYC	Yellow	30°	800/20	590
T-5 Three Leaded Bi/Tri-Color, Diffused Lens (Fig. H)				
SSL-LX5099IGW	Red/Grn.	70°	40/20	635/565
SSL-LX-5099YGW	Yel./Grn.	70°	40/20	585/565

Mfr. No.	Color	View. Angle	Iv/ mA	λ p (nm)
T-8 Jumbo Size, Diffused Lens (Fig. E)				
SSL-LX80113ID	Red	60°	60/20	635
SSL-LX80113GD	Green	60°	50/20	565
SSL-LX80113YD	Yellow	60°	60/20	585
SSL-LX80113SRD/D	S. Red	60°	400/20	660
T-10 Jumbo Size, Diffused Lens (Fig. J)				
SSL-LX100133ID	Red	70°	50/20	635
SSL-LX100133GD	Green	70°	40/20	565
SSL-LX100133YD	Yellow	70°	50/20	585
SSL-LX100133SRD/D	S. Red	70°	400/20	660
T-10 Jumbo Size Super Bright, Clear Lens (Fig. J)				
SSL-LX100133SRC	Red	28°	2500/20	660
SSL-LX100133SGC	Green	28°	400/20	570
SSL-LX100133SYC	Yellow	28°	600/20	590
2 × 5 Rectangular, Diffused Lens (Fig. K)				
SSL-LX2573SBD	Blue	110°	20/20	470
SSL-LX2573ID	Red	110°	10/20	635
SSL-LX2573GD	Green	110°	8/20	565
SSL-LX2573YD	Yellow	110°	8/20	585
SSL-LX2573SRD	S. Red	110°	60/20	660
4 × 6 Rectangular with Case, Diffused Lens (Fig. I)				
SSL-LX4673ID-LA20	Red	100°	20/20	635
SSL-LX4673GD-LA20	Green	100°	8/20	565
SSL-LX4673YD-LA20	Yellow	100°	8/20	585
SSL-LX4673SRD-LA20	S. Red	100°	80/20	660
Two 5 × 7 Rectangular, Diffused Lens (Fig. L)				
SSL-LX25783ID	Red	110°	15/20	635
SSL-LX25783GD	Green	110°	6/20	565
SSL-LX25783YD	Yellow	110°	6/20	585
SSL-LX25783SRD	S. Red	110°	50/20	660
2 × 5 Rectangular Bi/Tri-Color, Diffused Lens (Fig. M)				
SSL-LX2579IGW	Red/Grn.	110°	10/20	635/565
SSL-LX2579YGW	Yel./Grn.	110°	8/20	585/565

†Clear Lens

T-3 AND T-5 PANEL CLIPS

Mfr. No.	Description
SSH-LX3050	T-3 Panel Clip
SSH-LX5091	Black Nylon T-5 Panel Clip

www.relayspec.com RELAY SPECIALTIES A world of components sales@relayspec.com