PRINTED CIRCUIT BOARD LED INDICATORS

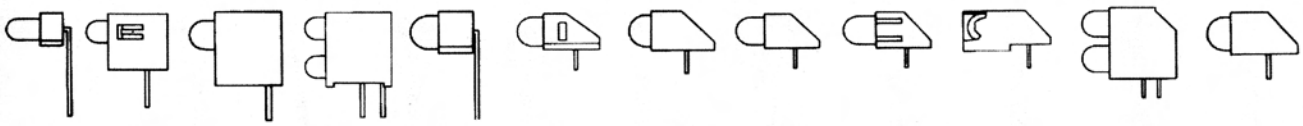

A B C D E F G H I J K L

Hot Tinned Pins. Diffused LED Lenses.

Mfr. No.	Color	λ p (nm)	If (mA)	Vf (TYP)	Iv at /mA
T-3 All Epoxy PCB Indicator (Fig. A)					
SSF-LX3P74ID-99	Red	635	5-25	2.2	14/20
SSF-LX3P74GD-99	Green	565	5-25	2.2	12/20
SSF-LX3P74YD-99	Yellow	585	5-25	2.2	12/20
SSF-LX3P74SRD-99	S. Red	660	5-25	1.7	60/20
SSF-LX3P74SRC-99	S. Red	660	5-25	1.7	170/20
T-3 Snap-On Holder PCB Indicator (Fig. B)					
SSF-LXH304ID	Red	635	5-25	2.2	14/20
SSF-LXH304GD	Green	565	5-25	2.2	12/20
SSF-LXH304YD	Yellow	585	5-25	2.2	12/20
SSF-LXH304SRD	S. Red	660	5-25	1.7	60/20
T-3 Snap-On Holder PCB Indicator Low Current Version (Fig. B)					
SSF-LXH304LID	Red	635	2-25	1.8	2.0/2
SSF-LXH304LGD	Green	565	2-25	1.8	1.0/2
SSF-LXH304LYD	Yellow	585	2-25	1.8	1.0/2
T-3 Popular Low Cost PCB Indicator (Fig. C)					
SSF-LXH103ID	Red	635	5-25	2.2	14/20
SSF-LXH103GD	Green	565	5-25	2.2	12/20
SSF-LXH103YD	Yellow	585	5-25	2.2	12/20
T-3 Dual LED Tower PCB Indicator (Fig. D)					
SSF-LXH240IID	Red	635	5-25	2.2	14/20
SSF-LXH240GGD	Green	565	5-25	2.2	12/20
SSF-LXH240YYD	Yellow	585	5-25	2.2	12/20
T-5 All Epoxy Low Cost PCB Indicator (Fig. E)					
SSF-LX453ID-99	Red	635	5-25	2.2	25/20
SSF-LX453GD-99	Green	565	5-25	2.2	20/20
SSF-LX456YD-99	Yellow	585	5-25	2.2	20/20
SSF-LX453SRD-99	S. Reed	660	5-25	1.7	70/20
T-5 Low Current PCB Indicator (Fig. F)					
SSF-LXH104LID	Red	635	2-5	1.8	3/2
SSF-LXH104LGD	Green	565	2-5	1.8	2/2
SSF-LXH104LYD	Yellow	585	2-5	1.8	2/2
SSF-LXH104SRD	S. Red	660	2-5	1.6	10/2

Mfr. No.	Color	λ p (nm)	If (mA)	Vf (TYP)	Iv at /mA
T-5 Bi-Color PCB Indicator (Fig. F)					
SSF-LXH104IGW	Red/Grn.	635/565	5-25	2.2	20/20
SSF-LXH104YGW	Yel./Grn.	585/565	5-25	2.2	20/20
T-5 Standard PCB Indicator (Fig. G)					
SSF-LXH100ID	Red	635	5-25	2.2	30/20
SSF-LXH100GD	Green	565	5-25	2.2	20/20
SSF-LXH100YD	Yellow	585	5-25	2.2	20/20
T-5 Standard Long Protrusion PCB LED (Fig. H)					
SSF-LXH100ID-01	Red	635	5-25	2.2	30/20
SSF-LXH100GD-01	Green	565	5-25	2.2	20/20
SSF-LXH100YD-01	Yellow	585	5-25	2.2	20/20
SSF-LXH100SRD-01	S. Red	660	5-25	1.7	100/20
T-5 mm Mating PCB Indicator (Fig. I)					
SSF-LXH100MID	Red	635	5-25	2.2	15/20
SSF-LXH100MGD	Green	565	5-25	2.2	12/20
SSF-LXH100MYD	Yellow	585	5-25	2.2	12/20
SSF-LXH100MSRD	S. Red	660	5-25	1.7	70/20
T-5 Shrouded PCB Indicator (Fig. J)					
SSF-LXH1071ID	Red	635	5-25	2.2	30/20
SSF-LXH107IGD	Green	565	5-25	2.2	20/20
SSF-LXH1071YD	Yellow	585	5-25	2.2	20/20
SSF-LXH1071SRD	S. Red	660	5-25	1.7	120/20
T-5 Dual Tower PCB Indicator (Fig. K)					
SSF-LXH250IID	Red	635	5-25	2.2	15/20
SSF-LXH250GGD	Green	565	5-25	2.2	12/20
SSF-LXH250YYD	Yellow	585	5-25	2.2	12/20
SSF-LXH250SRSRD	S. Red	660	5-25	1.7	70/20
T-5 Quad Ranch PCB Indicator (Fig. L)					
SSF-LXH400ID	Red	635	5-25	2.2	15/20
SFF-LXH400GD	Green	565	5-25	2.2	12/20
SSF-LXH400YD	Yellow	585	5-25	2.2	12/20
SSF-LXH400SRD	S. Red	660	5-25	1.7	70/20

MULTI-CHIP LIGHT BARS

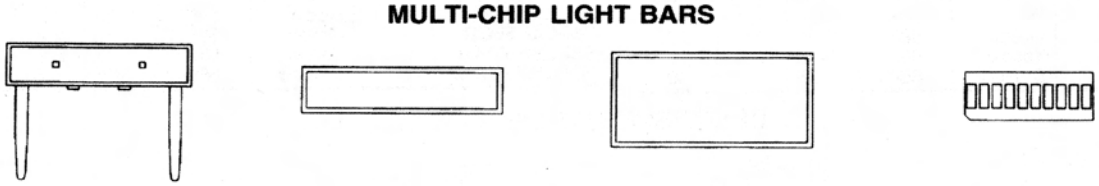

A B C D

Chip on Board Reliability.

Mfr. No.	Color	Viewing Angle	Iv/ mA	λ p (nm)	Fig.
Dual Chip Side Looking—Edge Lighting, 2 Chips, Clear Lens					
SSB-LX02IC	Red	160°	16/20	635	A
SSB-LX02GC	Green	160°	16/20	565	A
SSB-LX02YC	Yellow	160°	16/20	585	A
SSB-LX02SRC	S. Red	160°	60/20	660	A
5 × 20 Four Chip (8 Pins) Bar, 4 Chips, Diffused Lens					
SSB-LX2350IW	Red	160°	50/20	635	B
SSB-LX2550SGW	Green	160°	50/20	565	B
SSB-LX2450YW	Yellow	160°	50/20	585	B
SSB-LXB100SRW	S. Red	160°	80/20	660	B

Mfr. No.	Color	Viewing Angle	Iv/ mA	λ p (nm)	Fig.
10 × 20 Eight Chip (16 Pins) Bar, 8 Chips, Diffused Lens					
SSB-2685IW	Red	160°	80/20	635	C
SSB-LX2885SGW	Green	160°	80/20	565	C
SSB-LX2785YW	Yellow	160°	70/20	585	C
SSB-LX100SRW	S. Red	160°	100/20	660	C
10 × 25 Ten Chip (20 Pins) Bar, 10 Segments, 10 Chips, Diffused Lens					
SSA-LXB10IW	Red	160°	20/20	635	D
SSA-LXB10GW	Green	160°	15/20	565	D
SSA-LSB10YW	Yellow	160°	15/20	585	D
SSA-LXB10SRW	S. Red	160°	60/20	660	D

www.relayspec.com RELAY SPECIALTIES A world of components sales@relayspec.com