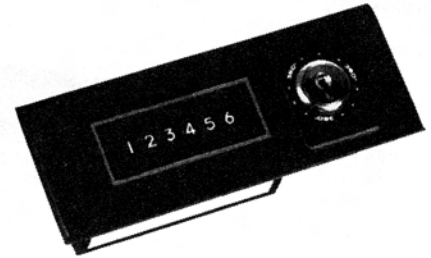





Model 10

Features

A 6 figure general purpose, rugged, electromechanical counter, either panel or base mounted, with manual knob reset, key reset, or non-reset. Die-cast frame and housing provides rigid support for accurate alignment and trouble-free use. Distinctive numerals enhance visibility under adverse viewing conditions.

Specifications

Figures	6 figures, white on black, .19" high
Reset	Knob, lock and key, or non-reset
Speed	1,000 counts/minute (min. 30ms - on, 30ms - off)
Voltage	24 and 115 VAC, 24 VDC (+/- 10%, but not to exceed 10 volts)
Power	7.8 watts (nominal)
Mounting	Base, or panel
Terminations	(2)#22 AWG 105°C wire leads, 8" long
Operating Life	Beyond 50 million counts
Temp. Range	-15°F to +140°F
Approvals	UL Recognized, CSA Certified
Weight	18 to 22 oz.
Options	Voltages, lead lengths, terminations

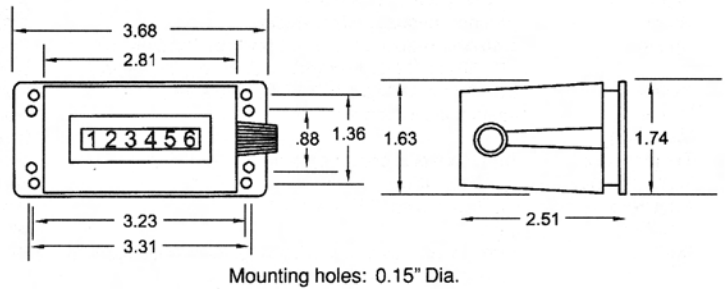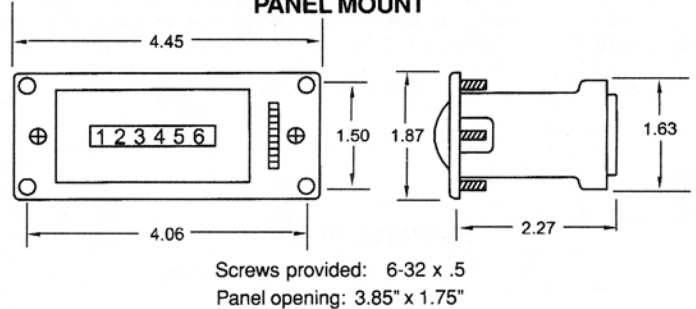Models	Description
2-1006	115VAC, base mount, knob reset
8-1006	24VDC, base mount, knob reset
2-1016	115VAC, base mount, non-reset
P2-1006	115VAC, panel mount, knob reset
P3-1006	24VAC, panel mount, knob reset
P8-1006	24VDC, panel mount, knob reset
P2-1016	115VAC, panel mount, non-reset
P32-1026	115VAC, panel mount, lock and key reset
P38-1026	24VDC, panel mount, lock and key reset

Dimensions
BASE MOUNT

PANEL MOUNT

LOCK AND KEY RESET
