




## Model 49



### Features

Economically priced 4 and 6 figure push-button reset, electromechanical counter designed for use where limited space is a factor and when reliability is critical. Rugged operating mechanisms require no lubrication or maintenance. Compact size and minimum space requirements make the 49's ideally suited for use in control panels, business machines, and test equipment.


### Specifications

<b>Figures</b>	4 or 6 figures, white on black, .16" high
<b>Reset</b>	Push-button
<b>Speed</b>	600 counts/minute (min. 50ms - on, 50ms - off)
<b>Voltages</b>	115VAC, 24VDC (+10% to - 15%)
<b>Power</b>	2 watts (nominal)
<b>Mounting</b>	Panel, base, or bail
<b>Termination</b>	(2) #22 AWG 105°C wire leads, 10" long
<b>Operating Life</b>	Beyond 100 million counts
<b>Temp. Range</b>	-15°F to +140°F
<b>Approvals</b>	UL Recognized
<b>Weight</b>	4 oz. (4 fig.), 5 oz. (6 fig.)
<b>Options</b>	Voltages, extended temperatures

Models	Description
B2-4904	115VAC, 4 figure, bail mount
B8-4904	24VDC, 4 figure, bail mount
D2-4904	115VAC, 4 figure, base mount
P2-4904	115VAC, 4 figure, panel mount
P8-4904	24VDC, 4 figure, panel mount
B2-4906	115VAC, 6 figure, bail mount
B8-4906	24VDC, 6 figure, bail mount
D2-4906	115VAC, 6 figure, base mount
P2-4906	115VAC, 6 figure, panel mount
P8-4906	24VDC, 6 figure, panel mount


### Dimensions

#### BAIL MOUNT

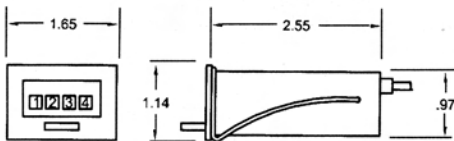


Panel cutout: 1.46" x 1.01"

#### BAIL MOUNT

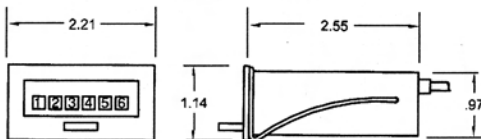


Panel cutout: 2.00" x 1.01"

#### BASE MOUNT

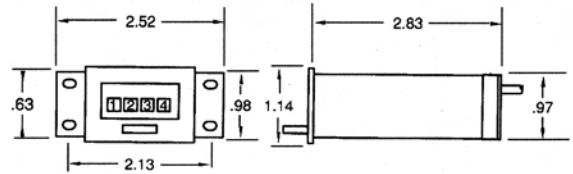


Mounting holes: .12" x .20" slots

#### BASE MOUNT

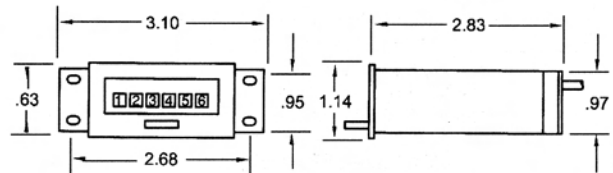


Mounting holes: .12" x .20" slots

#### PANEL MOUNT

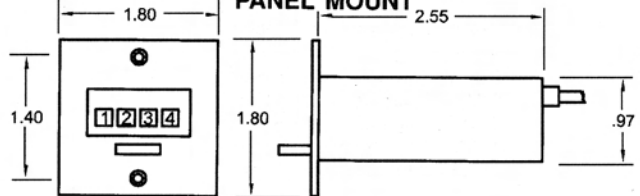

Panel cutout: 1.46" x 1.01"  
Mounting holes: For #4 flat head screw

#### PANEL MOUNT

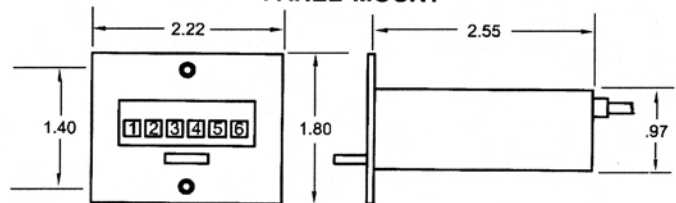

Panel cutout: 2.00" x 1.01"  
Mounting holes: For #4 flat head screw