

Model 710

Features

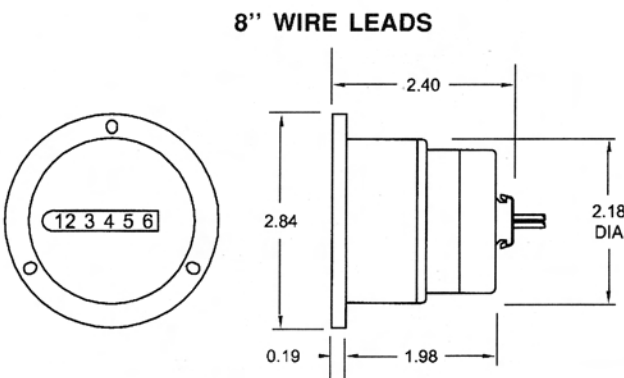
The model 710 AC hour meters and minute meters are widely used in panel applications where number size and visibility are critical. Its tough, Lexan bezel and distinctive styling enhance appearance and durability. Available in 5 figure reset or 6 figure non-reset versions.

Specifications

Figures	5 figures (reset) or 6 figure (non-reset), .19" high
Reset	Reset (on front or side) or non-reset
Voltages	24, 115 or 230VAC, (+/-10%), 50 or 60 Hz.
Power	3 watts (nominal)
Mounting	Panel (3-hole)
Terminations	8" wire leads or terminal block
Temp. Range	-20°F to +160°F
Approvals	UL Recognized, CSA Certified
Weight	6 oz.
Options	Private label faceplates, bracket mount, splash kit

Models
Description

710-0001	115VAC/60Hz., non-reset, 99,999.9 hrs., 8" wire leads
710-0002	115VAC/60Hz., non-reset, 99,999.9 hrs., terminal block
710-0003	230VAC/60Hz., non-reset, 99,999.9 hrs., 8" wire leads
710-0006	24VAC/60Hz., non-reset, 99,999.9 hrs., 8" wire leads
710-0007	230VAC/50Hz., non-reset, 99,999.9 hrs., 8" wire leads
710-0008	115VAC/60Hz., non-reset, 99,999 hrs., 8" wire leads
710-0009	115VAC/50Hz., non-reset, 99,999.9 hrs., 8" wire leads
710-0013	115VAC/60Hz., front reset, 9,999.9 hrs., 8" wire leads
710-0014	230VAC/60Hz., non-reset, 99,999.9 hrs., terminal block
710-0018	115VAC/60Hz., non-reset, 9,999.99 min., 8" wire leads
710-0022	115VAC/60Hz., non-reset, 99,999.9 hrs., 8" wire leads
710-0024	24VAC/60Hz., non-reset, 99,999.9 hrs., terminal block
710-0026	115VAC/50Hz., non-reset, 99,999.9 hrs., terminal block
710-0032	115VAC/60Hz., front reset, 9,999.9 hrs., terminal block
710-0051	115VAC/60Hz., non-reset, 99,999 hrs., terminal block

Dimensions


Mounting holes: For #4 screws on 2.44" B.C.
and #6 screws on 2.53" B.C.
Panel cutout: 2.21" Dia.

Model 720

Features

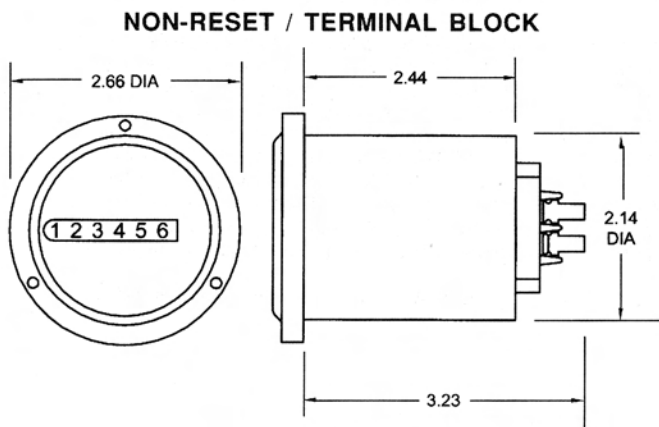
A 5 figure (reset) or 6 figure (non-reset), AC hourmeter encased in a rugged steel housing and designed to mil-spec environmental requirements. The non-reset models are completely sealed, and meet NEMA 4 standards. Reset models are available, as are both wire lead and terminal block versions.

Specifications

Figures	5 figure (reset) or 6 figure (non-reset), .19" high 9,999.9 (reset) or 99,999.9 (non-reset)
Reset	Reset or non-reset
Voltages	24, 115, and 230VAC (+/- 10%), 50 or 60Hz.
Power	2.5 watts (nominal)
Mounting	Panel (3-hole or metal clamp)
Termination	Terminal block or 6" wire leads
Temp. Range	-65°F to +155°F
Approvals	UL Recognized, CSA Certified
Weight	10 oz.
Options	Chrome bezel, readouts to 9999.99 hrs., minute meter, other voltages.

Models
Description

720-0001	24VAC/60Hz., non-reset, 3-hole round, 6" wire leads
720-0002*	115VAC/60Hz., M3971/2-2 and M3971/2-6
720-0003	115VAC/60Hz., M3971/2-1 and M3971/2-5
720-0004	115VAC/60Hz., non-reset, 3-hole round, terminal block
720-0007	115VAC/60Hz., non-reset, 3-hole round, 6" wire leads
720-0008	115VAC/60Hz., non-reset, metal clamp, terminal block
720-0011	115VAC/60Hz., non-reset, metal clamp, 6" wire leads
720-0012	115VAC/60Hz., front reset, 3-hole round, 6" wire leads
720-0030	115VAC/50Hz., non-reset, 3-hole round, 6" wire leads
720-0036	230VAC/60Hz., non-reset, 3-hole round, 6" wire leads
720-0123	230VAC/60Hz., non-reset, 3-hole round, terminal block

Dimensions


Panel cutout: 2.16" Dia.
Mounting holes: .125" Dia. on 2.44" B.C.
* Bezel: 3.50" Dia. with 3.16" B.C.