UF15PC Series

***UF15PC** series* features high-performance and exceptional quality at a very competitive price. Strong capacitor start motor generates 225 CFM. Thermal protected. Die-cast aluminum frame acts as a heat sink. UL94V-0 components. Motor quality ball bearings. Choice of terminal or nominal 12.0 inch lead wires.

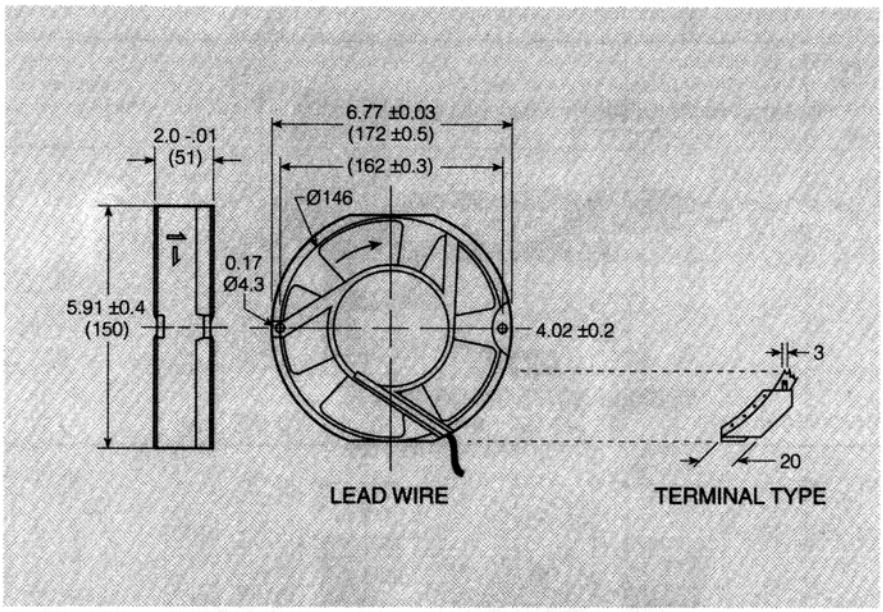

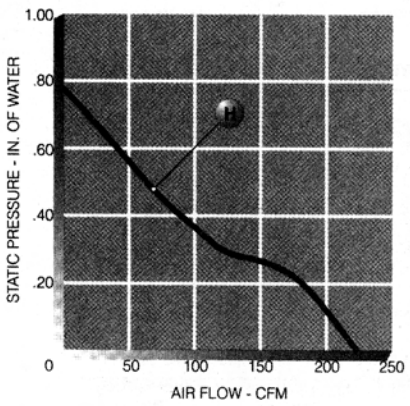

Model No.	Rated Voltage V	Frequency HZ	Input Power W	Rated Current A	Locked Current A	Speed RPM	Air Volume CFM	Maximum Pressure in H2O	Noise dBA	Weight OZ
UF15PC12-__H	115	60	32	0.30	0.41	3400	225	0.79	58	32
UF15PC23-__H	230	60	29	0.15	0.22	3400	225	0.79	58	32

FAN POWER CORDS

Model #	Plug Style	Cord Length (In.)
07100	Straight	12, 24, 36 thru 80
07145	45°	12, 24, 36 thru 80
07190	90°	12, 24, 36 thru 80
07199	"T"	12, 24, 36 thru 80

Special lengths and Daisy Chain/multiple fan connections available upon request
UL listed, CSA approved

FINGER GUARDS

Basic Model #	Fan O.D.	Centerline Dim. of Mounting Holes
SG-14	1.4 in./40mm	1.26 in./32mm
SG-24	2.4 in./60mm	1.97 in./50mm
SG-31	3.1 in./80mm	2.8 in./71mm
SG-36	3.6 in./92mm	3.25 in./82mm
SG-47	4.7 in./120mm	4.13 in./105mm
SG-59	5.9 in./150mm	6.38 in./162mm

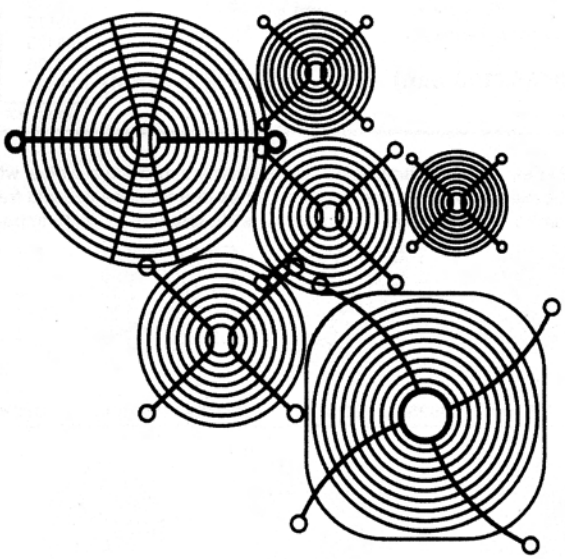

Finish - nickel chrome or black upon request
Meets UL spacing requirements
Plastic guards available in most frame sizes