



## DR SERIES POWER SUPPLIES

### SELECTION GUIDES

| AMP Rating         | 1                     |             | 2.5                   |             | 5                     |             | 10                    |             |
|--------------------|-----------------------|-------------|-----------------------|-------------|-----------------------|-------------|-----------------------|-------------|
| Input Voltage      | 120                   | 240         | 120                   | 240         | 120                   | 240         | 120                   | 240         |
| Catalog Number     | DR120241              | DR230241    | DR1202425             | DR2302425   | DR120245              | DR230245    | DR1202410             | DR2302410   |
| Voltage Range      | 93-132 Vac            | 187-264 Vac | 93-132 Vac            | 187-264 Vac | 93-132 Vac            | 187-264 Vac | 93-132 Vac            | 187-264 Vac |
| Frequency          | 47-63 HZ              |             | 47-63 HZ              |             | 47-63 HZ              |             | 47-63 HZ              |             |
| Output Voltage     | 24                    |             | 24                    |             | 24                    |             | 22.5-28.5 Vdc adj.    |             |
| MTBF (Life)        | 500,000 hours         |             | 500,000 hours         |             | 500,000 hours         |             | 500,000 hours         |             |
| Efficiency         | >86%                  |             | >86%                  |             | >86%                  |             | >90%                  |             |
| UL/CUL             | YES                   |             | YES                   |             | YES                   |             | YES                   |             |
| CE                 | YES                   |             | YES                   |             | YES                   |             | YES                   |             |
| Weight Approx.     | 1 lbs                 |             | 1.76 lbs              |             | 2.43 lbs              |             | 3.09 lbs              |             |
| Dimensions (HxDxW) | 3.43" x 3.07" x 4.02" |             | 3.43" x 3.07" x 5.55" |             | 3.43" x 3.07" x 7.09" |             | 4.92" x 4.53" x 7.09" |             |

### DIMENSIONS

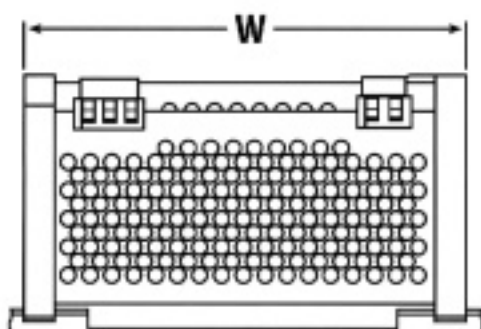

### ACCESSORIES

**DR END MOUNT ADAPTER.....**Part No. EMA 1-5

Allows the unit to be mounted on its end. Vital accessory when DIN-rail space is critical. (1-5 Amp models only)

**DR DUPLEX RECEPTACLE**

Part No. DR5262I (15 amp)

Part No. DRGF5262I (15 amp-GFI)

Provides safe access power for testing and maintenance.

**END CLAMP**

Aluminum Clamp.....Part No. AL-35

Screwless Clamp.....Part No. SL-35

**DIN-RAIL**

Perforated.....Part No. DR-35-P

Style EN50022

Size available 2 meter length.