



ORIGINAL EQUIPMENT CORDS 3-CONDUCTOR DETACHABLE UNSHIELDED, PVC JACKETED (CONT'D)

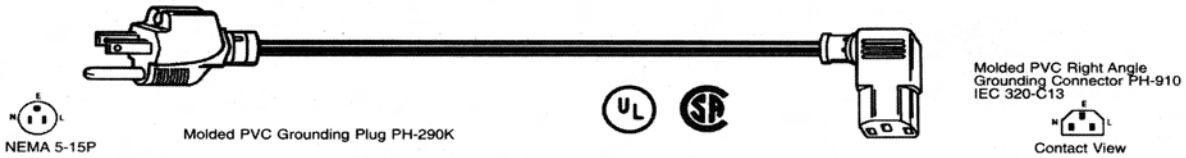

Belden No.	Length of Cord	Temp. °C	AWG (Stranding)	Nominal OD (In.)	Rating @125V		Type Cordage	Jacket Color
					Watts	Amps		
17506	6'7"	60	18(42×34)	.315	1250	10	SJT	Black
17507	9'10"	60	18(42×34)	.315	1250	10	SJT	Black
17508	6'7"	60	16(65×34)	.340	1625	13	SJT	Black
17509	9'10"	60	16(65×34)	.340	1625	13	SJT	Black

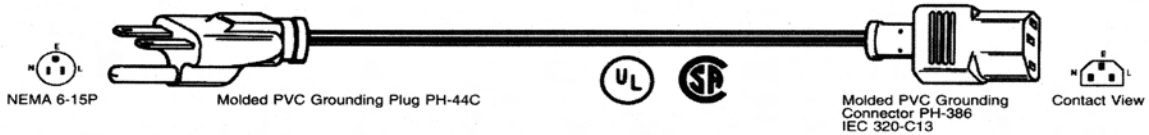


Belden No.	Length of Cord	Temp. °C	AWG (Stranding)	Nominal OD (In.)	Rating @250V		Type Cordage	Jacket Color
					Watts	Amps		
17566	6'7"	60	18(42×34)	.246	2500	10	SVT	Black
17567	9'10"	60	18(42×34)	.246	2500	10	SVT	Black
17568	6'7"	60	18(42×34)	.315	2500	10	SJT	Black
17569	9'10"	60	18(42×34)	.315	2500	10	SJT	Black

DETACHABLE WITH FULL MOUNTING EARS UNSHIELDED




Belden No.	Length of Cord	Temp. °C	AWG (Stranding)	Nominal OD (In.)	Rating @125V		Type Cordage	Jacket Color
					Watts	Amps		
17550	6'7"	60	18(42×34)	.246	1250	10	SVT	Black

DUOFOIL® AND BRAID SHIELDED, PVC JACKETED

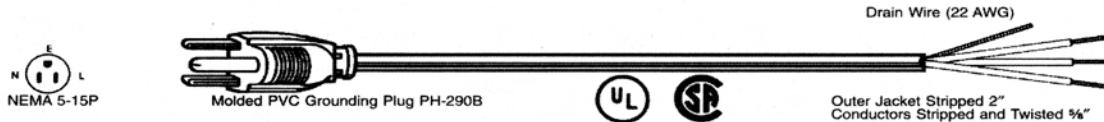

Belden No.	Length of Cord	Temp. °C	AWG (Stranding)	Nominal OD (In.)	Rating @125V		Type Cordage	Jacket Color
					Watts	Amps		
17650	6'7"	60	18(42×34)	.307	1250	10	SVT*	Black
17651	9'10"	60	18(42×34)	.307	1250	10	SVT*	Black

DETACHABLE DUOFOIL® AND BRAID SHIELDED, PVC JACKETED

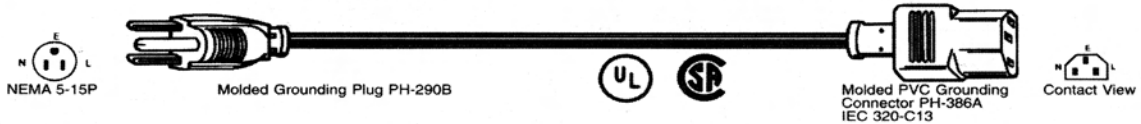

Belden No.	Length of Cord	Temp. °C	AWG (Stranding)	Nominal OD (In.)	Rating @125V		Type Cordage	Jacket Color
					Watts	Amps		
17660	6'7"	60	18(42×34)	.307	1250	10	SVT*	Black
17661	9'10"	60	18(42×34)	.307	1250	10	SVT*	Black

* Z-Fold® Duofoil Plus 85% Braid