SCHUKO DOUBLE EARTH 3-CONDUCTOR PLUGS

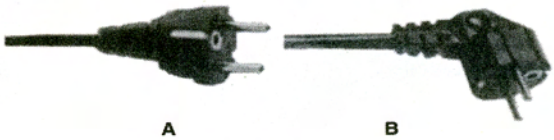

A B

STRAIGHT PLUG (FIG. A)

Specification: CEE7 Sht VII. **Operating Voltage**: 250V. **Insulation Resistance**: >10M ohms. **Cable Retention**: >60N. **Outside Body**: PVC. **Terminals**: Brass-nickel plated. **Length**: 2.50m. **Approval Code**: 3, 4, 6, 7, 8, 9, 10, 11, 12. **Approval**: See chart, following page.

Mfr. No.	Amps	Color	Termination
20-12213-250-BK	6	Black	Hard Wire 40mm/10mm
20-12233-250-BK	10	Black	Hard Wire 40mm/10mm
20-12234-250-BK	10	Black	EIC 320 STD C13 Straight
20-12234-250-MG	10	Gray	EIC 320 STD C13 Straight

RIGHT ANGLE PLUG (FIG. B)

Specification: CEE7 Sht VII. **Operating Voltage**: 250V. **Insulation Resistance**: >10M ohms. **Cable Retention**: >60N. **Outside Body**: PVC. **Terminals**: Brass-nickel plated. **Length**: 2.50m. **Approval Code**: 3, 4, 6, 7, 8, 9, 10, 11, 12. **Approval**: See chart, following page.

Mfr. No.	Amps	Color	Termination
20-22233-250-BK	10	Black	Hard Wire 40mm/10mm
20-22234-250-BK	10	Black	EIC 320 STD C13 Straight
20-22234-250-MG	10	Gray	EIC 320 STD C13 Straight

2-CONDUCTOR CLASS II STRAIGHT PLUG

Specification: CEE7 Sht XVII. **Operating Voltage**: 250V. **Insulation Resistance**: >10M ohms. **Cable Retention**: >60N. **Outside Body**: PVC. **Terminals**: Brass-nickel plated. **Length**: 1.0m. **Approval Code**: 3, 4, 6, 7, 8, 9, 10, 11, 12. **Approval**: See chart, following page.

Mfr. No.	Amps	Color	Termination
2130H	10	Black	Hard Wire 40mm/10mm

AUSTRALIAN 3-CONDUCTOR STRAIGHT PLUG

Specification: AS-3112-1981, NZ SS 198-1967. **Operating Voltage**: 250V. **Insulation Resistance**: >10M ohms. **Cable Retention**: >130N. **Outside Body**: PVC. **Terminals**: Brass-nickel plated. **Length**: 2.50m. **Approval Code**: 3, 4, 6, 7, 8, 9, 10, 11, 12. **Approval**: See chart, following page.

Mfr. No.	Amps	Color	Termination
14-12233-250-BK	10	Black	Hard Wire 40mm/10mm
14-12234-250-BK	10	Black	EIC 320 STD C13 Straight
14-12234-250-MG	10	Gray	EIC 320 STD C13 Straight
14-12234-300-BK	10	Black	EIC 320 STD C13 Straight
14-12234-300-MG	10	Black	EIC 320 STD C13 Straight

SWISS 3-CONDUCTOR STRAIGHT PLUG

Specification: ASE1011 (1959) Type 12. **Operating Voltage**: 250V. **Insulation Resistance**: >10M ohms. **Outside Body**: PVC. **Terminals**: Brass-nickel plated. **Length**: 2.50m. **Approval Code**: 12. **Approval**: See chart, following page.

Mfr. No.	Amps	Color	Termination
11-12234-250-BK	10	Black	EIC 320 STD C13

UNIVERSAL JUMPER/EIC 320 C/13, 3-CONDUCTOR STRAIGHT PLUG

Specification: BS4491, EN60 320, EIC320 STD 13, AS 3100 1983 STD 13. **Operating Voltage**: 250V. **Insulation Resistance**: >10M ohms. **Cable Retention**: >60N. **Outside Body**: PVC. **Terminals**: Phosphor bronze. **Length**: 1.0m. **Approval Code**: 1 through 17. **Approval**: See chart, following page.

Mfr. No.	Amps	Color	Termination
30-12234-100-BK	10	Black	EIC 320 STD C13
30-12234-250-BK	10	Black	EIC 320 STD C13

ITALIAN 3-CONDUCTOR STRAIGHT PLUG

Specification: CEI 23-16. **Operating Voltage**: 250V. **Insulation Resistance**: >10M ohms. **Cable Retention**: >60N. **Outside Body**: PVC. **Terminals**: Brass-nickel plated. **Length**: 2.50m. **Approval Code**: 1 through 10. **Approval**: See chart, following page.

Mfr. No.	Amps	Color	Termination
21-12234-250-BK	10	Black	EIC 320 STD C13

DANISH DATA 3-CONDUCTOR STRAIGHT PLUG

Specification: SRAF 1962/db 16/87. **Operating Voltage**: 250V. **Insulation Resistance**: >10M ohms. **Cable Retention**: >60N. **Outside Body**: PVC. **Terminals**: Brass-nickel plated. **Length**: 2.50m. **Approval Code**: 5. **Approval**: See chart, following page.

Mfr. No.	Amps	Color	Termination
16-12234-250-BK	10	Black	EIC 320 STD C13

SOUTH AFRICAN 3-CONDUCTOR STRAIGHT PLUG

Specifications: BS 546A, SABS 164-1980, IS 1293-1967. **Operating Voltage**: 250V. **Insulation Resistance**: >10M ohms. **Cable Retention**: >8kg. **Outside Body**: PVC. **Terminals**: Solid brass. **Length**: 2.50m. **Approval Code**: 18. **Approval**: See chart, following page.

Mfr. No.	Amps	Color	Termination
19-22234-250-BK	10	Black	EIC 320 STD C13

EURO-CORD, 2-CONDUCTOR STRAIGHT PLUG

Specification: CEE7 Sheet XVI. **Operating Voltage**: 250V. **Insulation Resistance**: >10M ohms. **Cable Retention**: >60N. **Outside Body**: PVC. **Terminals**: Brass-nickel plated. **Length**: 2.50m. **Approval Code**: 3, 7, 8, 9, 11, 12. **Approval**: See chart, following page.

Mfr. No.	Amps	Color	Termination
23-15103-250-BK	2.5	Black	Hard Wire 40mm/10mm
23-12103-250-BK	2.5	Black	Hard Wire 40mm/10mm

ISRAELI 3-CONDUCTOR RIGHT ANGLE PLUG

Specification: S.I.32. **Operating Voltage**: 250V. **Insulation Resistance**: >10M ohms. **Outside Body**: PVC. **Terminals**: Solid brass. **Length**: 2.50m. **Approval Code**: 19. **Approval**: See chart, following page.

Mfr. No.	Amps	Color	Termination
22-22234-250-BK	10	Black	EIC 320 STD C13 Straight