22

WIRES LINE CORDS & ACC

CABLE TIE ACCESSORIES

ABM1M-A

ABM100-A

TM

TA1


TA2

LPM

PWMS-H25

Adhesive backed and screw applied mounts.

Mfr. No.	Mtg.	Used With Cable Ties‡	Std. Pkg.
ABM1M-A-C	Adh.	M	100
ABMM-A-C	Adh.	M, I	100
ABM2S-A-C	Adh.	M, I, S	100
ABM100-A-C	Adh.	M, I, S	100
TM1S6-C	#6	M	100
TM2S8-C	#8	M, I, S	100
TM3S10-C	#10	M, I, S, H	100
TA1S8-C	#8	M, I, S	100
TA2-C	#10	M, I, S	100
TP2-C	#10	M, I, S	100
TP4H-C	¼″	M, I, S, H	100
LPMM-S2-C	#2	M	100
LPMM-S5-C	#5	M	100
LPMS-S8-C	#8	M, I, S	100
PWMS-H25-C	¼″ hole	M, I, S	100

‡Tie cross-section; M = Miniature, I = Intermediate, S = Standard, H = Heavy (including LH, excluding .35″ heavy) U. L. Recognized.

NYLON MARKER PLATES

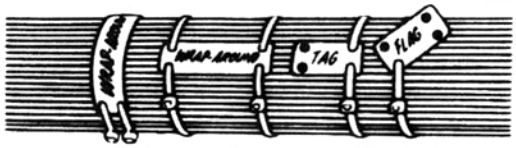

Used with cable ties. Can be mounted in any direction. Marked with nylon marking pens. Also available in rolls of 1000.

Mfr. No.	Size (In.)	Used with Cable Ties	Std. Pkg.
MP150-C	1½×¾		100
MP175-C	1¾×¾	Miniature,	100
MP200-C	2×¾	Intermediate,	100
MP250-C	2½×¾	and Standard	100
MP350-C	3½×¾	Cross	100
MP250W175-C	2½×1¾	Section	100

NYLON MARKING PENS



Provide fast drying, permanent marking on any nylon part.

Mfr. No.	Tip Style	Color
PFX-0	Fine	Black
PFX-2	Fine	Red
PX-0	Reg.	Black
PX-2	Reg.	Red
PX-10	Reg.	White

NYLON CIRCUIT BOARD POSTS & SUPPORTS


CBP CBLS

CBP series circuit board posts for board-to-board or board-to-chassis mounting. Accept up to 0.062″ thick panel; have 0.156″ dia. mounting hole. CBLS series circuit board locking supports for board-to-chassis supporting. Types CBLS18-C and CBLS25-C for circuit boards; 0.062″ thick panel with 0.156″ dia. mounting holes. Type CBLS50-C for chassis; 0.03″ to 0.08″ thick panel with 0.187″ to 0.192″ dia. mounting holes. All provide stability and are releasable/reusable. Sold in packages of 100.

Mfr. No.	Std. Height (In.)
CBP12-C	0.125
CBP25-C	0.250
CBP37-C	0.375
CBP50-C	0.500
CBP75-C	0.750
CBP100-C	1.000
CBLS18-C	0.180
CBLS25-C	0.250
CBLS50-C	0.500

NYLON WIRE STANDOFFS

Ideal for retaining wires, cable, components or tubing away from panel or conductive chassis. Finger-grip flange can be locked/unlocked. Hand installed in pre-drilled panel hole. Fit 0.187″ to 0.192″ dia. hole on 0.03″ to 0.08″ thick panel. UL recognized. Sold in packages of 100.

Mfr. No.	D (In.)	H (In.)
WS25-25-C	0.25	0.25
WS25-50-C	0.25	0.50
WS25-75-C	0.25	0.75
WS35-25-C	0.35	0.25
WS35-50-C	0.35	0.50
WS35-75-C	0.35	0.75
WS50-25-C	0.50	0.25
WS50-50-C	0.50	0.50
WS50-75-C	0.50	0.75
WS75-25-C	0.75	0.25
WS75-50-C	0.75	0.50
WS75-75-C	0.75	0.75

TWISTER PUSH MOUNTS

TPM mounts accept bundles up to .62″ Recommended hole size, 5/32 - 3/16″, recommended panel thickness .025 - .105″. Twist ends to lock and release. Sold in packages of 100.

Mfr. No.	Standard Height (In.)
TPM-16-C	.00
TPM5-16-C	.20
TPM10-16-C	.39
TPM15-16-C	.59
TPM20-16-C	.79
TPM25-16-C	.98
TPM30-16-C	1.18

Toll Free 1-800-526-5376 • 201-337-1000 • Fax 201-337-1862