


HSRN

Features

- Manual swipe reader: Ideal for access control, POS, time/attendance and ID control
- Single or double track configuration available
- Low power consumption
- Modular wire harness accessories
- Universal type enables reading any ISO track by moving head and adjusting slide switches
- TTL interface



Characteristic Data

Power consumption

Single track: 5mA @ 5 VDC

Double track: 10mA @ 5 VDC

Service life 300,000 passes minimum

Card feed speed 10 to 120 cm/sec.

Operating temperature -10°C to +55°C

Ordering Information


Part number	Type	Tracks	Enclosure
3S4YR-HSR4N-01	Standard	1	No cover
3S4YR-HSR4NU-01	Universal	1, 2 & 3	No cover
3S4YR-HSR6N-01	Standard	1 & 2	No cover
3S4YR-HSR6NU-01	Universal	1 & 2 or 2 & 3	No cover
3S4YR-HSR7N-01	Standard	2 & 3	No cover

Accessories


Part number	Description
Cover assy. for HSR	Set of 2 covers
Cable KTI-240	For HSR4N, HSR4NU
Cable KTI-260	For HSR6N, HSR6NU
Cable KTI-261	For HSR7N

Dimensions [Unit: mm (inch)]

3S4YR-HSRN (Enclosed models)

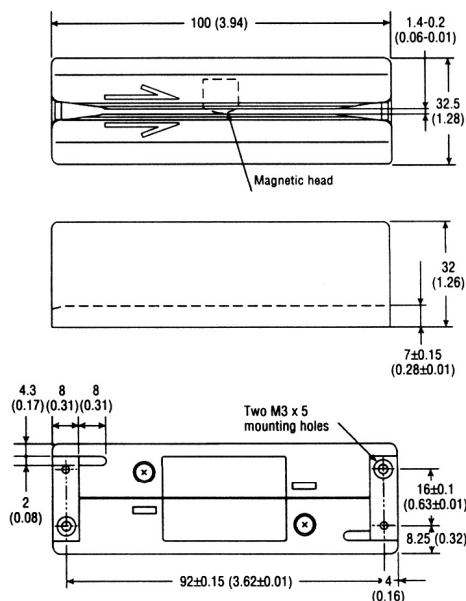

3S4YR-HSRN (Open models)

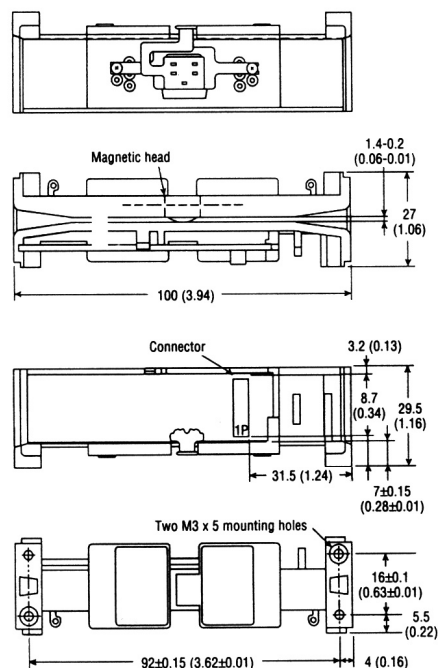

Note: 1. Unless otherwise indicated, tolerance is ± 0.3 (.012).