


SBR

Features

- Manual insert reader: Ideal for access controls, time/attendance, ID control, telephone
- Reads 62% of magnetic stripe
- Single or double track available
- Interchangeable housing with SCR
- Capable of reading HiCo in accordance with ISO standard
- Equipped with microswitches for card detection
- TTL interface



24

CARD READERS

Characteristic Data

Power consumption 25mA @ 5 VDC

Service life 300,000 passes minimum (round trip)

Card feed speed 10 to 100 cm/sec.


Operating temperature -10°C to +55°C

Ordering Information

Part number	ISO tracks
3S4YR-SBR3-20	1
3S4YR-SBR4-20	2
3S4YR-SBR5-20	3
3S4YR-SBR6-20	1 & 2
3S4YR-SBR7-20	2 & 3

Dimensions [Unit: mm (inch)]

3S4YR-SBR

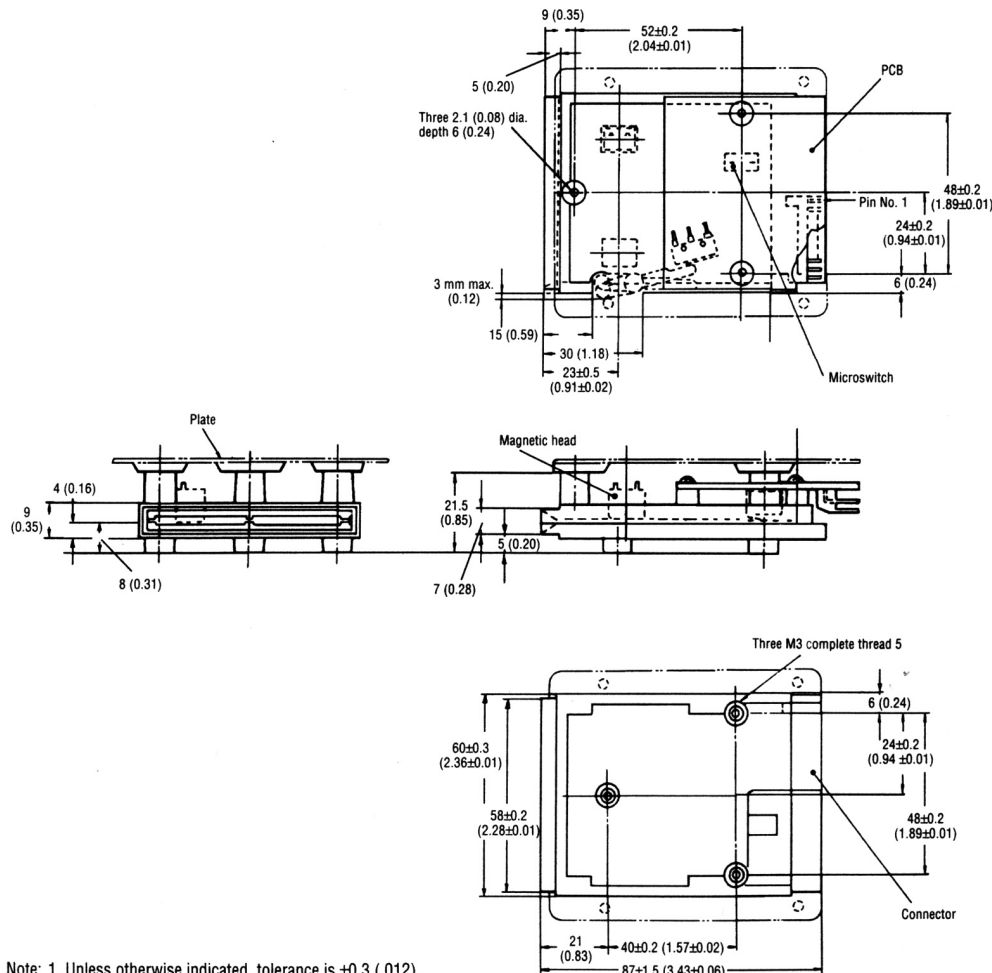

Note: 1. Unless otherwise indicated, tolerance is ±0.3 (.012).