

AC to AC Output Adapters

Standard Products
North American use,
input 120 VAC, 60Hz



AC Output Adapters

Output VAC	Case	Size	Model	UL	CSA/CUL
4.5 @ 300mA	WPI	35	AP3440	X	X
4.5 @ 500	WPI	35	AP3441	X	X
4.5 @ 1200	WPI, DT	41	AP3442	X	X
6 @ 200	WPI	35	AP3443	X	X
6 @ 400	WPI	35	AP3444	X	X
6 @ 800	WPI, DT	41	AP3445	X	X
6 @ 1200	WPI, DT	41	AP3446	X	X
6 @ 1500	WPI, DT	48	AP3447	X	X
7.5 @ 200	WPI	35	AP3448	X	X
7.5 @ 400	WPI	35	AP3449	X	X
7.5 @ 600	WPI, DT	41	AP3450	X	X
7.5 @ 1000	WPI, DT	41	AP3379W	X	X
7.5 @ 1200	WPI, DT	41	AP3451	X	X
9 @ 200	WPI	35	AP3452	X	X
9 @ 300	WPI	35	AP3453	X	X
9 @ 400	WPI	35	AP2855	X	X
9 @ 600	WPI, DT	41	AP3454	X	X
9 @ 700	WPI, DT	41	AP3455	X	X
9 @ 1000	WPI, DT	41	AP3141W	X	X
9 @ 1200	WPI, DT	48	AP3456	X	X
9 @ 1500	WPI	48	AP3305W	X	X
12 @ 150	WPI	35	AP3457	X	X
12 @ 200	WPI	35	AP3458	X	X
12 @ 300	WPI	35	AP3070W	X	X
12 @ 500	WPI, DT	41	AP3405	X	X
12 @ 800	WPI, DT	41	AP3378W	X	X
12 @ 1000	WPI, DT	48	AP1795W	X	X
12 @ 1670	WPI	57	AP2013W	X	X
12 @ 4500	DT	66	AP1985	X	X
13.5 @ 1000	WPI, DT	48	AP3460	X	X
14 @ 2800	WPI	57	AP3125	X	X
15 @ 200	WPI	35	AP3461	X	X
15 @ 500	WPI, DT	41	AP3377W	X	X
15 @ 600	WPI, DT	41	AP2540	X	X
15 @ 700	WPI, DT	48	AP3399	X	X
15 @ 1000	WPI	57	AP3464	X	X
18 @ 200	WPI	35	AP3465	X	X
18 @ 500	WPI, DT	41	AP3466	X	X
18 @ 600	WPI, DT	48	AP3467	X	X
18 @ 1000	WPI	57	AP3468	X	X
19.5 @ 800	WPI	57	AP2513W	X	X
22 @ 1500	DT	57	AP3217	X	X
24 @ 150	WPI	35	AP3469	X	X
24 @ 400	WPI, DT	41	AP3470	X	X
24 @ 570	WPI, DT	48	AP3376W	X	X
24 @ 1200	WPI	57	AP2881	X	X
24 @ 3000	DT	66	AP3388	X	X
24 @ 5000	DT	76	AP4410	X	X
26 @ 7500	DT	76	AP3389	X	X
26 @ 2250 CT	DT	66	AP3569	X	X

Case designations: WPI - wall plug-in
 DT - desk top (cable to cable)

International Applications
Input 230 VAC, 50 Hz


AC Output Adapters

Output VAC	Case	Size	Model	TUV
9 @ 200mA	WPI	57	AP1896E	X
9 @ 2500	DT	57	AP2241E	X
12 @ 500	WPI	41	AP3405E	X
12 @ 1000	WPI, DT	48	AP1795EW	X
12 @ 1800	DT	57	AP3041E	X
16 @ 700	WPI	48	AP2067E	X
18 @ 1400	DT	57	AP1740F	X
19.5 @ 800	DT	48	AP2513E	X
24 @ 800	WPI	57	AP1540E	X
24 @ 1200	DT	57	AP2881E	X

Bold face "W" model listings are generally readily available from distribution. These are off-the-shelf standard, wall plug-ins or desk tops as indicated, with 2.5 x 5.5 x 11mm female center positive connectors. Where indicated, desk top cases are available by adding "D" to the part model number. All are available with a variety of output connectors.

New High Power AC Adapters

Up to 180 VA external power applications filled by E176 design.

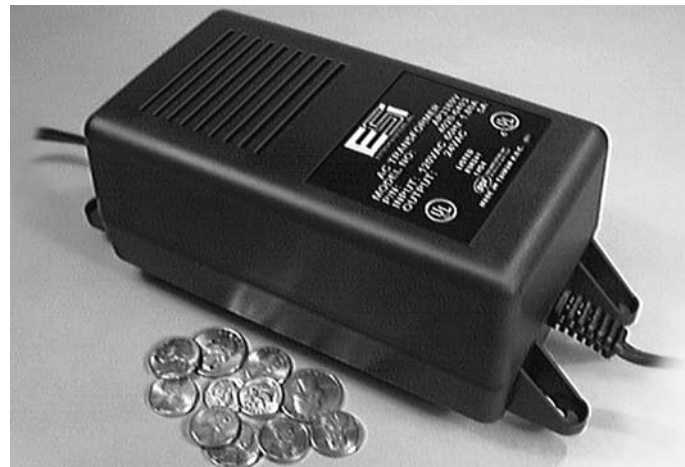

Desk-Top case with keyhole feet for screw-down mounting.

Example: 24 VAC @ 7.5A

Choice of options:

- Output voltage
 - Power-On LED's
 - User accessible fuses
 - External circuit breaker
 - Output cable connectors
- Consult sales for details

