

DC Output Unregulated Adapters

Standard Products
North American use,
Input 120 VAC, 60Hz



DC Output Adapters

Output VDC	Case	Size	Model	UL	CSA/CUL
3 @ 500mA	WPI	35	AP3471	X	X
3 @ 1500	WPI, DT	41	AP3472	X	X
4.2 @ 100	WPI	35	AP3473	X	X
4.5 @ 500	WPI	35	AP3474	X	X
4.5 @ 1200	WPI, DT	41	AP3475	X	X
6 @ 200	WPI	35	AP3476	X	X
6 @ 300	WPI	35	AP2382	X	X
6 @ 400	WPI	35	AP3155W	X	X
6 @ 800	WPI, DT	41	AP3477	X	X
6 @ 1000	WPI, DT	41	AP3374W	X	X
6 @ 1200	WPI, DT	48	AP3478	X	X
6 @ 1500	WPI, DT	48	AP3479	X	X
7.5 @ 200	WPI	35	AP3480	X	X
7.5 @ 400	WPI	35	AP3481	X	X
7.5 @ 600	WPI, DT	41	AP3482	X	X
7.5 @ 900	WPI, DT	41	AP3483	X	X
7.5 @ 1200	WPI, DT	48	AP3484	X	X
8 @ 1200	WPI, DT	48	AP3485	X	X
9 @ 200	WPI	35	AP2911W	X	X
9 @ 300	WPI	35	AP3486	X	X
9 @ 400	WPI	35	AP3487	X	X
9 @ 500	WPI, DT	41	AP1325W	X	X
9 @ 700	WPI, DT	41	AP3488	X	X
9 @ 800	WPI, DT	41	AP3489	X	X
9 @ 1000	WPI, DT	48	AP2072W	X	X
9 @ 1200	WPI, DT	48	AP3490	X	X
9 @ 1500	WPI	57	AP3491	X	X
10 @ 1000	WPI, DT	48	AP3492	X	X
12 @ 150	WPI	35	AP3493	X	X
12 @ 300	WPI	35	AP2837W	X	X
12 @ 500	WPI, DT	41	AP3745W	X	X
12 @ 600	WPI, DT	41	AP3375W	X	X
12 @ 800	WPI, DT	48	AP3495	X	X
12 @ 1000	WPI, DT	48	AP2105W	X	X
12 @ 1500	WPI	57	AP1828W	X	X
12 @ 2500	DT	66	AP2410W	X	X
13 @ 700	WPI, DT	48	AP3496	X	X
13.5 @ 1300	WPI	57	AP3497	X	X
15 @ 200	WPI	35	AP3498	X	X
15 @ 400	WPI, DT	41	AP2848W	X	X
15 @ 700	WPI, DT	48	AP3499	X	X
15 @ 900	WPI	48	AP2637W	X	X
15 @ 1000	WPI	57	AP3500	X	X
15 @ 2000	DT	66	AP2783W	X	X
18 @ 200	WPI	35	AP3501	X	X
18 @ 400	WPI, DT	41	AP2925	X	X
18 @ 600	WPI, DT	48	AP3502	X	X
18 @ 800	WPI	57	AP4830W	X	X
18 @ 1000	WPI	57	AP3503	X	X
24 @ 100	WPI	35	AP3504	X	X
24 @ 300	WPI, DT	41	AP3505	X	X
24 @ 570	WPI, DT	48	AP2654W	X	X
24 @ 750	WPI	57	AP3029W	X	X

Case designations: WPI - wall plug-in
 DT - desk top (cable to cable)


International
Applications
Input 230 VAC, 50 Hz

DC Output Adapters

Output VDC	Case	Size	Model	TUV
6 @ 200mA	WPI	35	AP3476E	X
6 @ 500	WPI	41	AP3740E	X
9 @ 300	WPI	41	AP3486E	X
9 @ 500	WPI	41	AP1325EW	X
9 @ 1000	DT	48	AP2072EW	X
12 @ 300	WPI	41	AP2837EW	X
12 @ 500	WPI	48	AP3745EW	X
12 @ 600	WPI	48	AP1254E	X
12 @ 2500	DT	66	AP3012E	X
18 @ 800	WPI	57	AP2360E	X



High Power Unregulated
DC Output available up to
100 watts in new EI76 case.

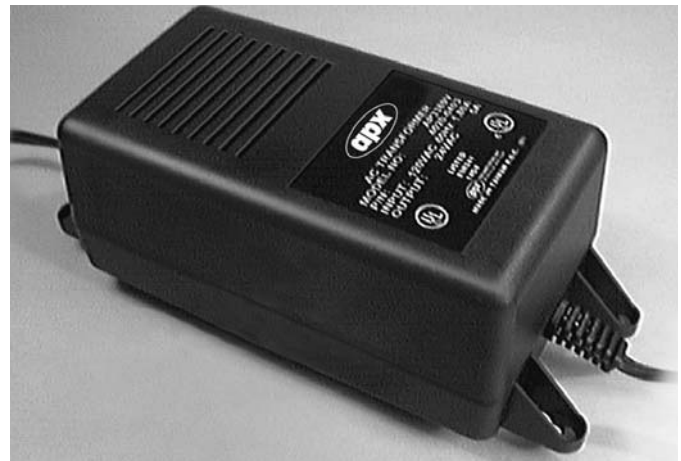

Example: 12 VDC @ 7.5A

Available options include externally accessible circuit protection, input and output cables and connectors, LED Indicator. Consult sales with your application

Family Safety Approvals

Extensive alternative output combinations are available under APX family-wide safety approvals. See pages 6 and 7.

See pages 2,3,8 and 9 for options, case and cable details, and output connectors



TECHNOLOGIES INC.
 HICKSVILLE, NEW YORK

264 Duffy Avenue, Hicksville, New York 11801 • Tel. (516) 433-1313 • Fax: (516) 433-1457 • E-mail: sales@apxonline.com
 Website: www.apxtechnologies.com • www.apxonline.com