



► OPERATION


When voltage is applied to the input terminals, the relay energizes and the time delay begins. Upon completion of the delay period, the relay de-energizes. Reset during or after the delay period is accomplished by

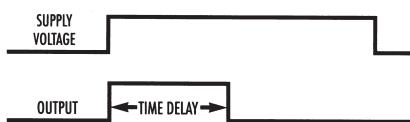

► WIRING

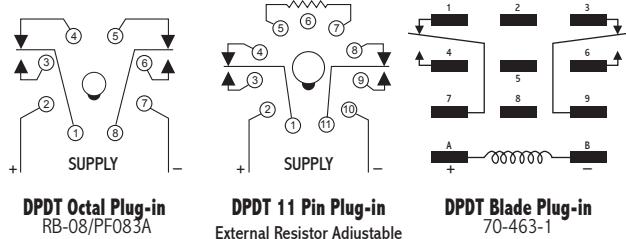

► DIMENSIONS (INCHES)

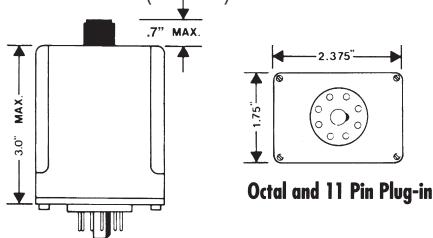

► MODEL NUMBER

MODEL NUMBER	T		*B		A		
SERIES							
Relay Output	D						
Relay Output with CSA	U*						
SUPPLY VOLTAGE							
24 VAC or DC			24				
110/120 VAC or DC			120				
TYPE OF OPERATION							
Knob Adjustable				K			
Lock Nut Adjustable				L			
Fixed				F			
External Resistor Adjustable				R**			
ENCLOSURE STYLE							
8 or 11-pin Round Plug-in				A			
Blade Plug-in				B			
Non UL 12-pin Plug-in				C			


► DELAY PERIOD

See page 77 for standard ranges available

Example: TUB-120-AKA-900—Interval on operate, 120 Volts AC or DC, knob adjustable from 9 to 900 seconds, 8-pin octal plug-in, UL recognized and CSA approved.

Notes: * The TUB series is offered in 120 Volts, style A enclosure only with optional types of operation "K", "L", or "F" CSA certified, File # LR40123**

TDB models using the "R" option are not UL Recognized. The "R" option is not offered in the TUB series or the style B enclosure. TDB models using "F", "K", or "L" options and in the 8-pin octal plug is only available in 24-volts.

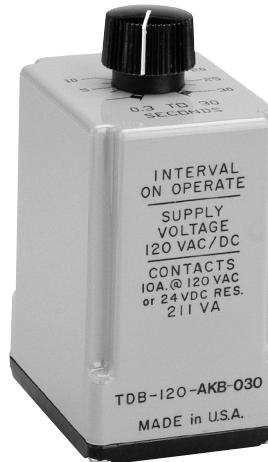

Interval Relay Output

► SPECIFICATIONS

TIMING RANGES

Virtually unlimited. See page 77 for standard ranges available.

OUTPUT DPDT, 10 A @ 250 VAC or 24 VDC, resistive;
RATING 211 VA @ 120 VAC, inductive

TIMING Minimum Setting +0-20%;
TOLERANCES Maximum Setting ±10%;

REPEATABILITY 1% maximum; no first cycle effect

RESET TIMES Before Time Out 100 mSEC
After Time Out 50 mSEC

RECYCLE TIME 40 mSEC

SUPPLY VOLTAGE 24 or 120 VAC or VDC, 50/60 Hz; ±10%;
(TUB Series available in 120 Volts only)

FALSE TRANSFER No

REVERSE POLARITY Yes

PROTECTED

POWER CONSUMPTION 3 watts (approximately)

DUTY CYCLE Continuous

TEMPERATURE RATING Operate 32° to 131°F (0° to +55°C)
Storage -49° to 185°F (-45° to +85°C)

LIFE EXPECTANCY Mechanical 10 million operations (minimum)
Electrical 100,000 operations
@ rated load

WEIGHT 5 oz.