

HR-Series

HALO ILLUMINATED SEALED ROCKER SWITCH

The HR-Series is a perimeter illuminated, IP68 sealed rocker switch, featuring a stylish, low profile actuator that is available in either two or three positions. These rocker switches have a variety of dependent and independent illumination options; momentary and maintained circuits; and up to two customizable laser-etched legends.

The patented design supports the various illumination options and allows the switch to be rated up to 20 amps, eliminating the need for relays. Additionally, these low profile rocker switches fit the industry standard cutout.



Product Highlights:

- Dynamic Perimeter Illumination
- IP68 Above Panel Sealing Protection
- 20A 12VDC
- Maintained and Momentary Circuits
- Various Illumination Options
- Single and Double Pole



Resources:

[Configure a Complete Part](#)

[**Download CAD & Sales Drawing >**](#)

[Watch Product Video](#)



Typical Applications:

- Marine
- On/Off-Highway
- Lawn Equipment
- Golf Carts
- Outdoor Construction Signage
- Any Application Requiring Sealing Protection



Carling Technologies®
Innovative Designs. Powerful Solutions.

Carling Technologies, Inc.
60 Johnson Avenue, Plainville, CT 06062
Email: sales@carlingtech.com
Application Support: team2@carlingtech.com
Phone: 860.793.9281 Fax: 860.793.9231

www.carlingtech.com

HR-Series Switch

DESIGN FEATURES

20A 12VDC RATING

Robust construction to handle a multitude of electrical loads.

SNAP-IN MOUNTING

Fits into an industry standard mounting hole of 1.450 x .830 in. (Same as V-Series and W-Series)

PERIMETER ILLUMINATION

Choice of independent (full) or dependent (half) lighting, in a variety of colors.

IP68 ABOVE PANEL SEALING

Seals out dust and moisture.



.110 TERMINALS

With dedicated TE connector for ease of installation. Sold Separately. (See General Specs for TE Part Numbers).

MAINTAINED/ MOMENTARY

Circuits available in 2 or 3 positions.

LASER ETCHED LEGENDS

Rocker icons convey a clean, sleek OEM look, with independent or dependent illumination.

Electrical

Operating Voltage	Designed for 12 Volt systems 9-16 VDC operating
Contact Rating	Maximum 20 amps at 12 VDC
Supply Voltage ratings	The switch passes the following supply voltage testing: SAE J1455 section 4.13.1 for power up, operating voltage, over voltage, reverse polarity, and short circuit
Dielectric Strength	Across open contacts: 500 V RMS AC for 1 minute From pole to pole (on multi pole variants) 500 V RMS AC for 1 min.
Insulation Resistance	50 Megaohms
Initial contact resistance	10 milliohms max
Life	Up to 100,000 cycles, circuit and load dependent
Contacts	Silver tin-oxide
Terminals	Up to 10 external connector terminals 0.110" wide silver-plated copper terminals

Mechanical

Endurance	200,000 cycles minimum, circuit dependent
-----------	---

Physical

Illumination	One or two LED backlit laser marked icons (configurable to be independent or dependent) Uniform full or half perimeter (configurable to be independent or dependent) Dimmable illumination (icons and perimeter), controlled by supply voltage
illumination	LEDs rated for 50,000 hour life
Seals	Internal
Base	Nylon, V-0 UL flammability rating
Actuator	Polycarbonate, V-2 UL flammability rating, painted and laser marked
Perimeter lens	Polycarbonate, V-2 UL flammability rating
Bracket/Bezel	Polycarbonate polyester blend, V-0 UL flammability rating

Mounting Specifications

Panel thickness range	0.062" to 0.187"
Panel cutout	0.830" x 1.450"
	See Dimensional Specs (same as V-Series and W-Series)

Environmental

Sealing	IP68 per ISO 20653. This rating applies to front panel components of the actual switch only
Operating Temp.	-40°C to 85°C The following codes were passed: Cold Soak (IEC 60068-2-1) Heat Soak (IEC 60068-2-2) Cycling/Shock (IEC 60068-2-14) General: IEC 60068-2-6, Swept sine wave section 8.2, 5 - 500 Hz 20 cycles 10g acceleration Resonance: IEC 60068-2-6, Vibration sinusoidal, section 8.1, 10 - 2000 Hz, 5g acceleration Random: IEC 60068-2-64, Method 1, random excitation, 10 - 350 Hz, 5 hours in each axis
Vibration	
Shock and Bump	IEC 60068-2-27, Shock 500 m/s ² 11 milliseconds, Bump 200 m/s ² 6 milliseconds 600 cycles
Salt Spray (Corrosion resistance)	IEC 60068-2-52, Test Kb, Severity level 4 (test duration 336 hours)
Moisture resistance	MIL-STD-202 Method 103B, Test Condition A (240 hours)
Solar Radiation	IEC 60068-2-5, procedure B, 10 cycles, Total irradiation per cycle = 22.4 kWh/m ²
Chemical Resistance	ISO 16750-5, spray or brush method. Gasoline, diesel fuel, motor oil, brake fluid, Armour all, Windex
Weathering/Cracking Resistance	ASTM D1171-99, method A, 72 hours
Abrasion/Wear Resistance	40 cycles of ASTM F2357 testing with 0.25" paper at 175 grams of force

Connector

Switch mates with TE connector housing part number 1418994-1. Based on application wire size choose receptacle part number below (or equivalent):

1-968880-1	20-24 AWG wire
1-968849-1	17-20 AWG wire
1-968851-1	13.5-17 AWG wire
1-968853-1	12 AWG wire

Actuator Travel (Angular Displacement)

2 position	24°
3 positions	12° from center


HR	11	D	1	A1	1	B	A	1	-	1	1	-	00	00	0
1 Series	2 Circuit	3 Rating	4 Termination /Base Style	5 Illumination Circuit	6 Perimeter Style	7 Perimeter Illumination Color	8 Rocker Illumination Color	9 Bracket Color	10 Rocker Color	11 Rocker Style	12 Legend	13 Legend	14 Legend Orientation		

1 SERIES**HR** HR-Series Halo Illuminated Rocker Switch**2 CIRCUIT**

Position:		1	2	3
Single Pole	Double Pole	5&7, 6&8	Connected Terminals	3&5, 4&6
11	21	ON	NONE	OFF
12	22	(ON)	NONE	OFF
14	24	ON	NONE	ON
15	25	ON	NONE	(ON)
16	26	ON	OFF	ON
18	28	(ON)	OFF	(ON)

3 RATING**D** 20A 12V**4 TERMINAL / BASE STYLE****1** .110 TAB (QC)**5 ILLUMINATION CIRCUIT 1, 2, 3**

Terminal Connections as viewed from back of switch:

**FULL PERIMETER ILLUMINATION****Perimeter Illumination:** Independent 9(+) 1(-) for codes **A1** to **A7****Rocker Illumination:****2 and 3 Position Switches**

A1	Independent	LED 1: 10(+) 1(-)	LED 2: 2(+) 1(-)
A2	Independent	LED 1: 10(+) 1(-)	No Illumination
A3	No Illumination		

2 Position Switch	Position 1	Position 3
A4	Dependent LED 1: 5(+) 1(-)	LED 2: 5(+) 1(-)
A5	Dependent LED 1: 10(+) 1(-)	LED 2: 5(+) 1(-)
A6	Dependent LED 1: 5(+) 1(-)	No Illumination

3 Position Switch	Position 1	Position 2	Position 3
A7	Dependent LED 1: 5(+) 1(-)	No Illumination	LED 2: 5(+) 1(-)

HALF PERIMETER ILLUMINATION**Rocker Illumination:** LED 1 and 2: 10(+) 1(-)**Perimeter Illumination:**

3 Position Switch	Position 1	Position 2	Position 3
B1	Dependent Top Half On	Full Illumination	Bottom Half On
	10(+) 2(+) 1(-)	10(+) 1(-)	10(+) 9(+) 1(-)

For a visual representation of the illumination options, see next page.
For custom illumination options, please consult factory.

6 PERIMETER STYLE**1** Full Ring**7 PERIMETER ILLUMINATION COLOR**

B	Blue
G	Green

8 ROCKER ILLUMINATION COLOR

Z	None
W	White
B	Blue
G	Green
A	Amber
R	Red

9 BRACKET COLOR

1	Painted Black
2	Painted Silver

10 ROCKER COLOR

1	Painted Black
2	Painted Silver

11 ROCKER STYLE**1** Laser Etch**12 LEGEND****00** No Legend

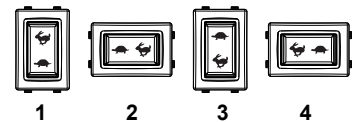
For standard legends, see "Standard Legend Codes" page.
For additional legends, please consult factory

13 LEGEND**00** No Legend

For standard legends, see "Standard Legend Codes" page.
For additional legends, please consult factory

10 LEGEND ORIENTATION

0	No Legend
1	Orientation 1
2	Orientation 2
3	Orientation 3
4	Orientation 4

**Notes:**

- Code (A4) only available with 2 Position Circuits (14, 15, 24, 25)
- Codes (A5, A6) only available with 2 Position Circuits (11, 12, 13, 14, 15, 21, 22, 23, 24, 25)
- Codes (A7, B1) only available with 3 Position Circuits (16, 17, 18, 26, 27, 28)

Independent Illumination:

2 Position Switch			3 Position Switch				
Position 1		Position 3	Position 1		Position 2	Position 3	
A1			A1				
				A2			
					A3		

Dependent Illumination:

2 Position Switch		
	Position 1	Position 3
A4		
A5		
A6		

3 Position Switch			
	Position 1	Position 2	Position 3
A7			
B1			

LEGEND: Used for illumination representation only.
Refer to legend code page for complete list if standard legends.

Standard Legend Codes:

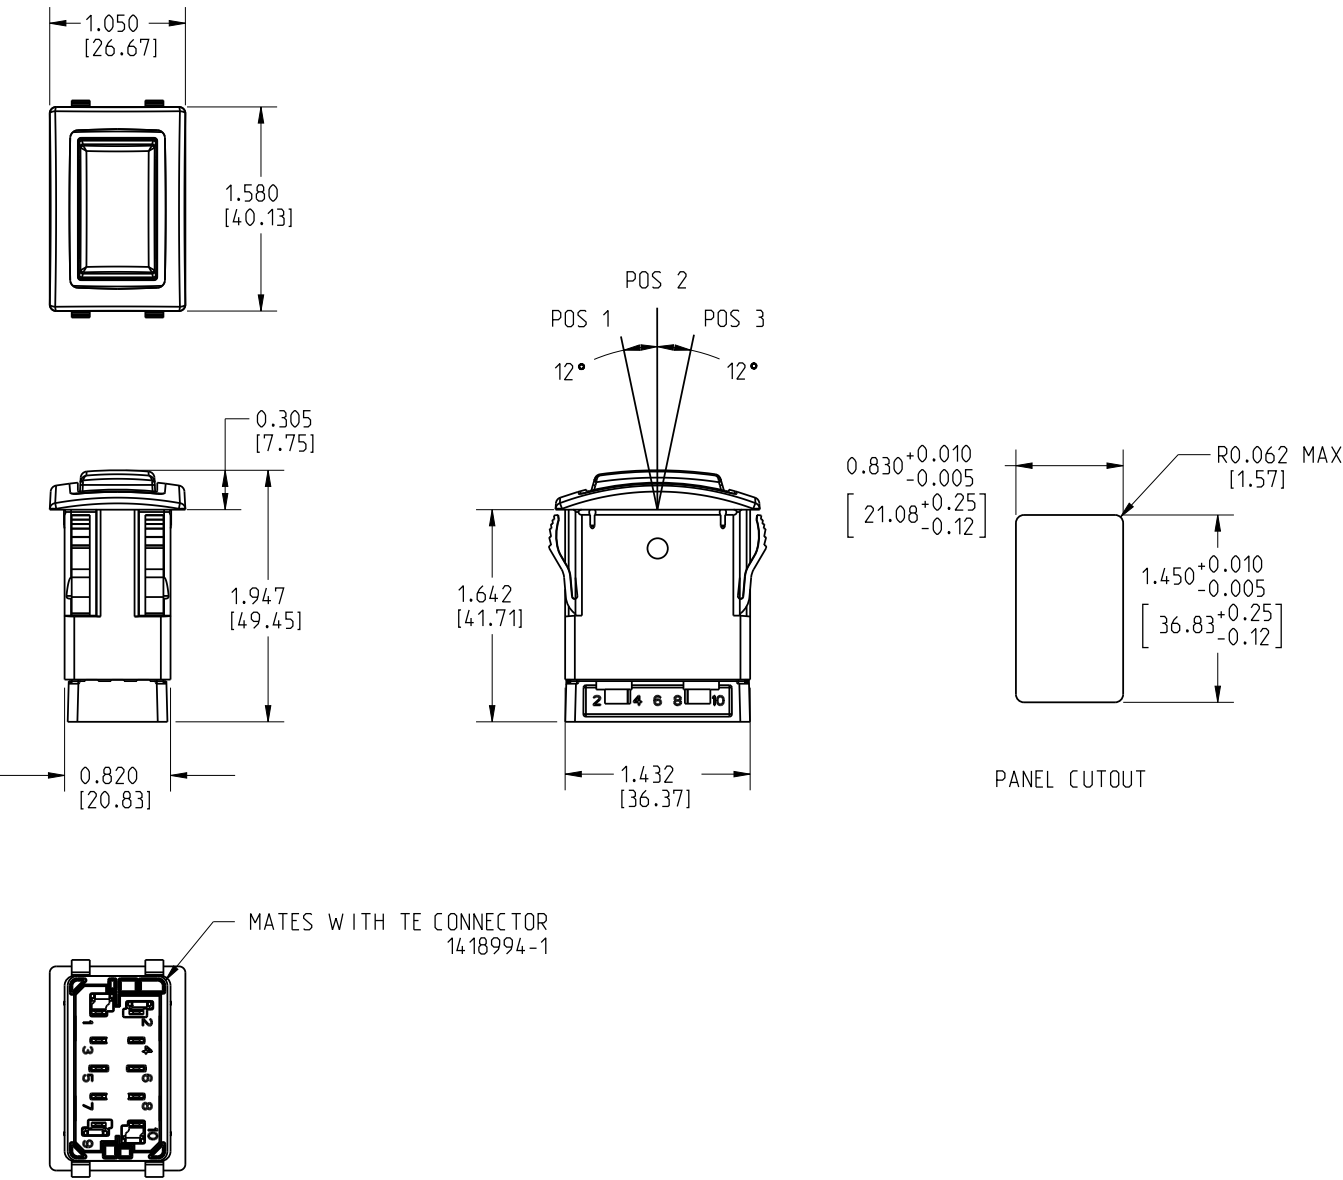
VU	MW	NZ	NX	NY	YM	VW	PS	PW	PZ	WG	WM	RN
RP	YG	TX	NAV LIGHTS	COURT LIGHTS	PANEL LIGHTS	ANCH LIGHTS	HEAD LIGHTS	FOG LIGHTS	DASH LIGHTS	DOCK LIGHTS	BEACON	LIGHT
DIM WY	BRIGHT WZ						BILGE PUMP VC	BILGE VJ				
NS	PB	WIPER SE										
NR	YD	TL	VR	ENG FAN SL	BLWR VA					HORN UZ		
NV							UP WS	DOWN WT				
PA	UK	WATER PUMP WR			ANCHOR YR							
MY	PV	TA	TZ	WC	PT	PN	PH	RA	TU	TT	ENG HATCH YL	ENG BRAKE SK
VS	UL	UM	WK	TS	VT	TCS WL	VP	YJ	PJ	RY	UP	NW
NP	RE	RF	PP	PR	TV	PC	YT	YU	PL	WJ	MV	RR
TK	RT	SEAT SZ				PG	CRUISE SJ					
RS	UN	TP	TR	NT	MX	YC	TW	TJ	YF	TH	TF	TG
YS	YH	AUX SX	ON OFF RZ	OFF ON YP	I O WN	O I WP	OFF ON WW	ON WX	OFF SA	I SB	O SC	II SD
RAISE ST	LOWER SU	HIGH WU	LOW WV	FWD SV	REV SW	DEPTH VB	TRIM TAB VH	ACC VK	NAV ANCH VL	WIND LASS UP/DN VM	LIVE WELL WE	REAR SF
PARK SG	AUTO SS											

Notes:

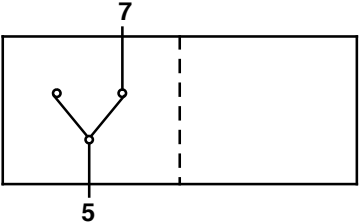
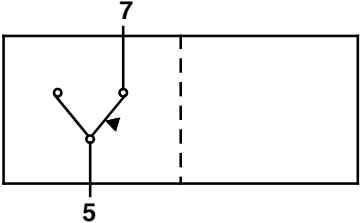
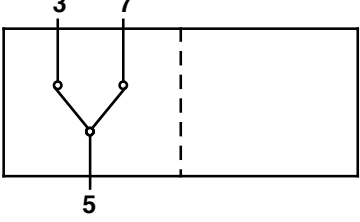
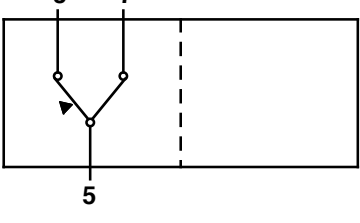
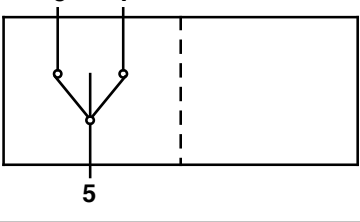
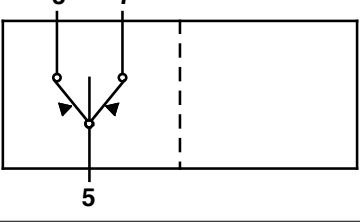
1 ISO compliant symbols. Consult factory for custom legends.

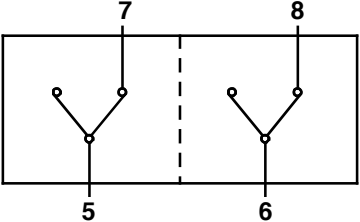
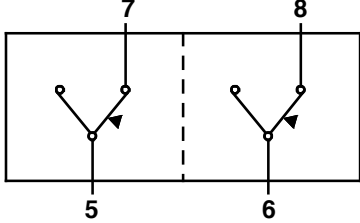
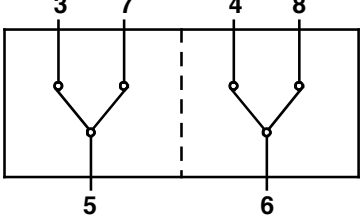
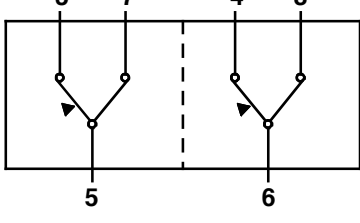
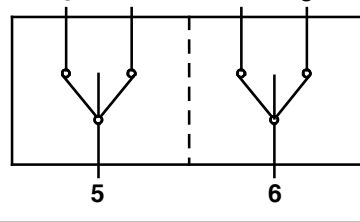
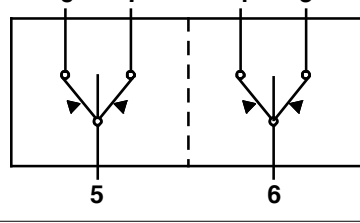
2 New legend codes recommended for new part set ups. Previous codes still valid for existing customers.

Dimensional Specifications: in. [mm]



Circuit Diagrams:

Circuit Code	CIRCUIT DIAGRAM
11	
12	
14	
15	
16	
18	

Circuit Code	CIRCUIT DIAGRAM
21	
22	
24	
25	
26	
28	

Illumination Circuit Diagrams:

Illumination Code	ILLUMINATION CIRCUIT DIAGRAM
A1	
A2	
A3	
A4	

Illumination Code	ILLUMINATION CIRCUIT DIAGRAM
A5	
A6	
A7	
B1	

Authorized Sales Representatives and Distributors

Click on a region of the map below to find your local representatives and distributors or visit www.carlingtech.com/findarep.



About Carling

Founded in 1920, Carling Technologies is a leading manufacturer of electrical and electronic switches and assemblies, circuit breakers, electronic controls, power distribution units, and multiplexed power distribution systems. With four ISO registered manufacturing facilities and technical sales offices worldwide, Carling Technologies Sales, Service and Engineering teams do much more than manufacture electrical components, they engineer powerful solutions! To learn more about Carling please visit www.carlingtech.com/company-profile.

To view all of Carling's environmental, quality, health & safety certifications please visit www.carlingtech.com/environmental-certifications

Worldwide Headquarters

Carling Technologies, Inc.
60 Johnson Avenue, Plainville, CT 06062
Phone: 860.793.9281 **Fax:** 860.793.9231
Email: sales@carlingtech.com

Northern Region Sales Office: nrsm@carlingtech.com
Southeast Region Sales Office: sersm@carlingtech.com
Midwest Region Sales Office: mrsm@carlingtech.com
West Region Sales Office: wrsm@carlingtech.com
Latin America Sales Office: larsm@carlingtech.com

Asia-Pacific Headquarters

Carling Technologies, Asia-Pacific Ltd.,
Suite 1607, 16/F Tower 2, The Gateway,
Harbour City, 25 Canton Road,
Tsimshatsui, Kowloon, Hong Kong
Phone: Int + 852-2737-2277 **Fax:** Int + 852-2736-9332
Email: sales@carlingtech.com.hk

Shenzhen, China: shenzhen@carlingtech.com
Shanghai, China: shanghai@carlingtech.com
Pune, India: india@carlingtech.com
Kaohsiung, Taiwan: taiwan@carlingtech.com
Yokohama, Japan: japan@carlingtech.com

Europe | Middle East | Africa Headquarters

Carling Technologies LTD
4 Airport Business Park, Exeter Airport,
Clyst Honiton, Exeter, Devon, EX5 2UL, UK
Phone: Int + 44 1392.364422 **Fax:** Int + 44 1392.364477
Email: ltd.sales@carlingtech.com

Germany: gmbh@carlingtech.com
France: sas@carlingtech.com



Carling Technologies®

Innovative Designs. Powerful Solutions.