

Illuminated Pushbutton - 16mm & 19mm

Specifications



Electrical Ratings	2A @ 36VDC 1A @ 125VAC 0.5A @ 250VAC	Actuation Force 16mm 19mm	500 ± 100gF 550 ± 100gF
Sealing Degree	IP67	Actuation Travel 16mm 19mm	1.6 ± .25mm 2.0 ± .25mm
Electrical Life	50,000 cycles typical	Insulation Resistance	≥ 100MΩ min
Contact Resistance	≤ 50mΩ initial	Operating Temperature	-25°C to 55°C
Dielectric Strength	2000Vrms min contact to contact 2000Vrms min contact to LED	Storage Temperature	-25°C to 55°C

Materials

Actuator	Stainless Steel or Nickel Plated Brass or Gold Plated Brass, Aluminum
LED Lens	Polycarbonate (PC)
Threaded Body	Stainless Steel or Nickel Plated Brass or Gold Plated Brass, Aluminum
Terminal Support	Polybutylene Terephthalate (PBT)
Contacts	Silver Alloy
Terminals	Brass, Epoxy Sealed
Hardware	One Hex Nut & One "O" Ring Supplied

Contact Factory for

- Cable Assembly
- Plastic Convex Actuator
- Shine Through Symbols
- Laser Etching

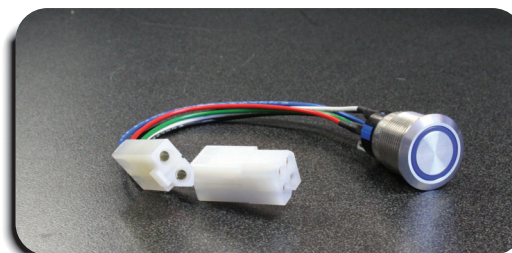


Illuminated Pushbutton - 16mm & 19mm

Ordering Information


1. Series	BH16	N	R	S	Z	X
BH16 = 16mm BH19 = 19mm						
2. Bezel Style Blank = Standard Bezel H = Straight Bezel						
3. Switch Function N = Momentary						
4. Actuator Style: F = Flush M = Round R = Raised B = Flush, ring illuminated C = Flush dot illuminated E = Raised, ring illuminated Available in 16mm only G = Flush, international stand-by symbol illuminated Available in 16mm only J = Round, ring illuminated Available in 16mm only K = Round, dot illuminated Available in 16mm only L = Raised, dot illuminated Available in 16mm only EC = Epoxy Convector contact factory for details						
5. Switch Finish: B = Black anodized aluminum G = Green anodized aluminum Contact factory for availability N = Nickel plated brass P = Gold plated brass R = Red anodized aluminum Contact factory for availability S = Brushed stainless steel U = Blue anodized aluminum Contact factory for availability Y = Yellow anodized aluminum Contact factory for availability						
6. Terminal Options B = Solder Lugs C = Quick Connect Terminal Z = Screw Terminal Not available with RGB LED						
7. LED Color X = No LED R = Red Y = Yellow G = Green B = Blue W = White O = Orange RO = Red / Orange dual LED RY = Red / Yellow dual LED RG = Red / Green dual LED RB = Red / Blue dual LED OY = Orange / Yellow dual LED OG = Orange / Green dual LED OB = Orange / Blue dual LED OW = Orange / White dual LED YG = Yellow / Green dual LED YB = Yellow / Blue dual LED GB = Green / Blue dual LED GW = Green / White dual LED RGB = Red / Green / Blue Available in 16mm only						

Dimensions


16mm - Actuator Styles

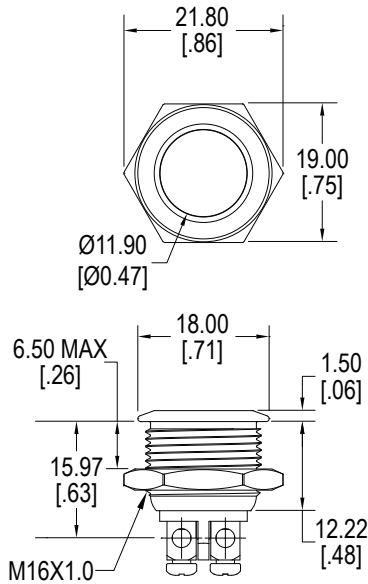


Flush

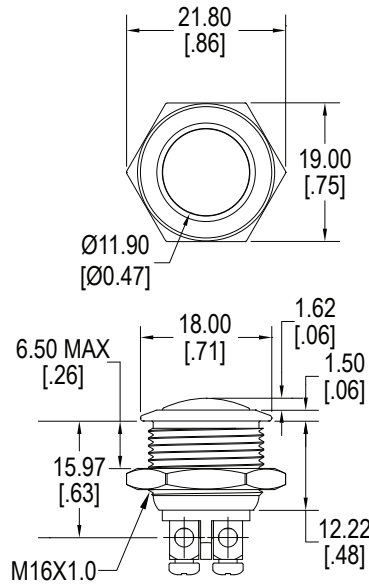


Round

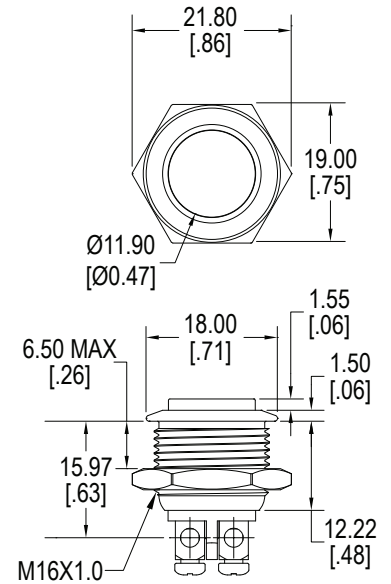


Raised

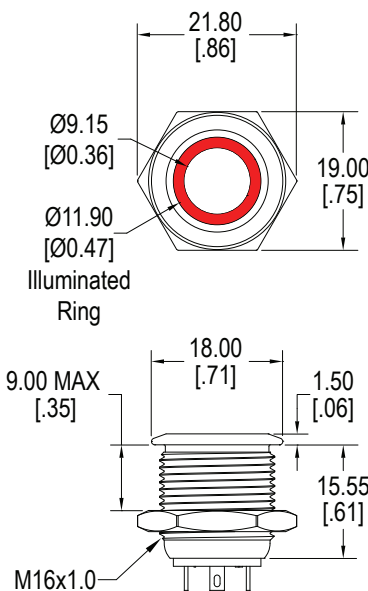

Flush, Ring Illuminated

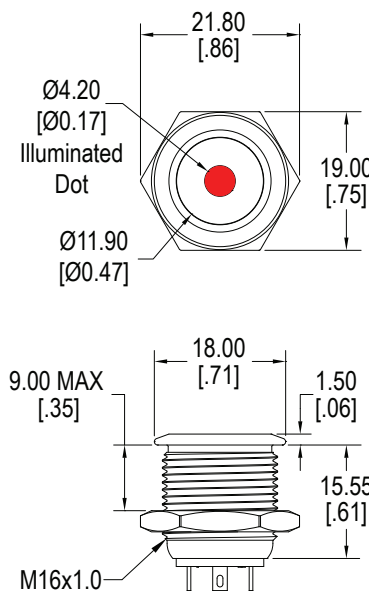

Flush, Dot Illuminated

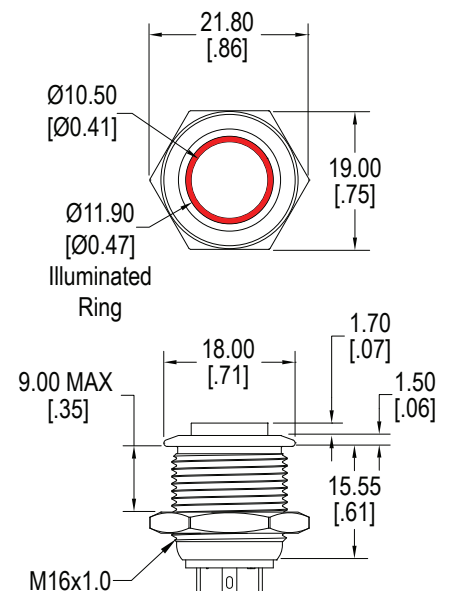


Raised, Ring Illuminated


Illuminated Pushbutton - 19mm

Dimensions


16mm - Actuator Styles, Illuminated

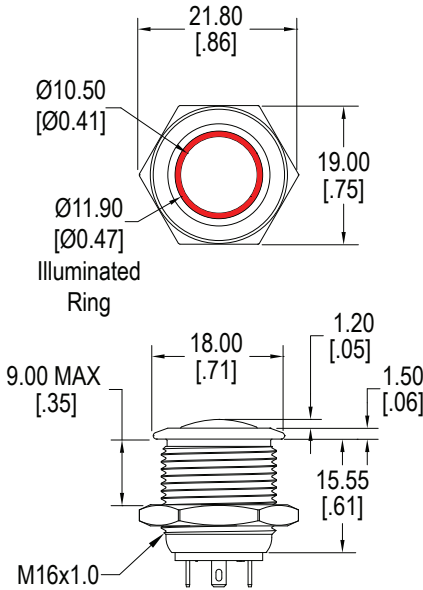


Round, Ring Illuminated

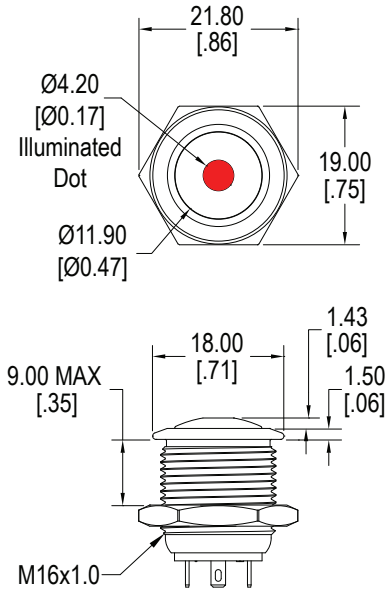

Round, Dot Illuminated

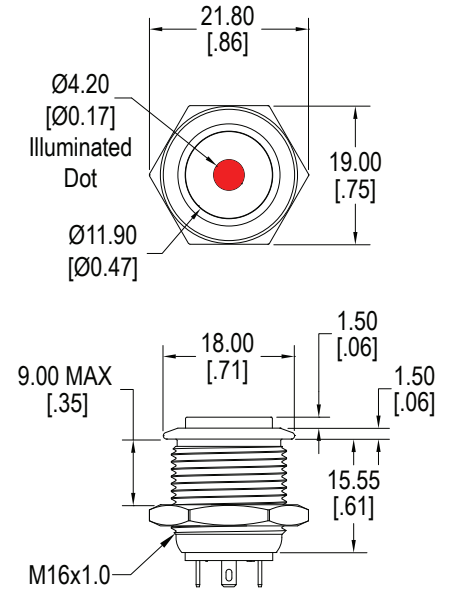


Raised, Dot Illuminated

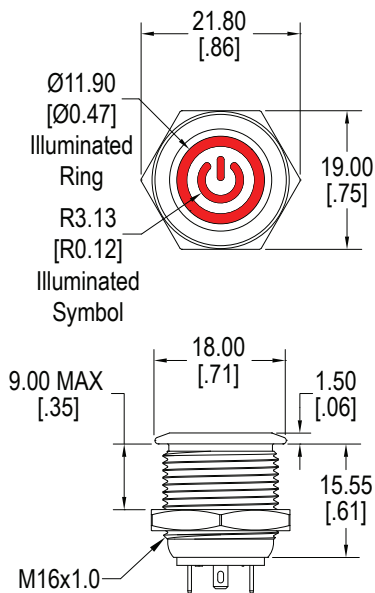


Flush, Int'l Standby

Dimensions


19mm - Actuator Styles

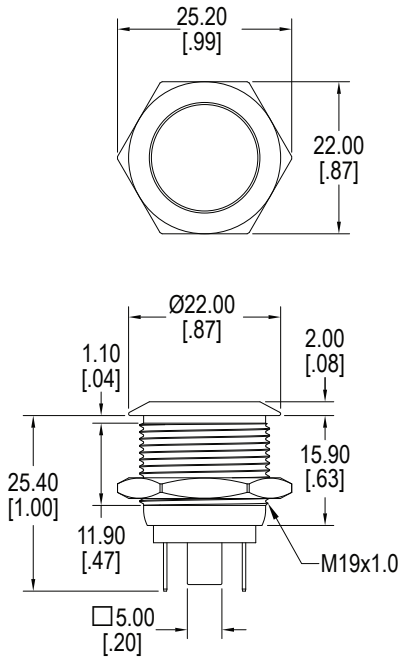


Flush

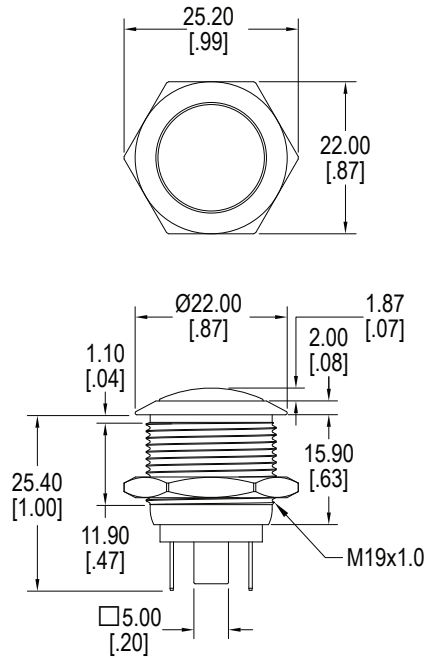


Round

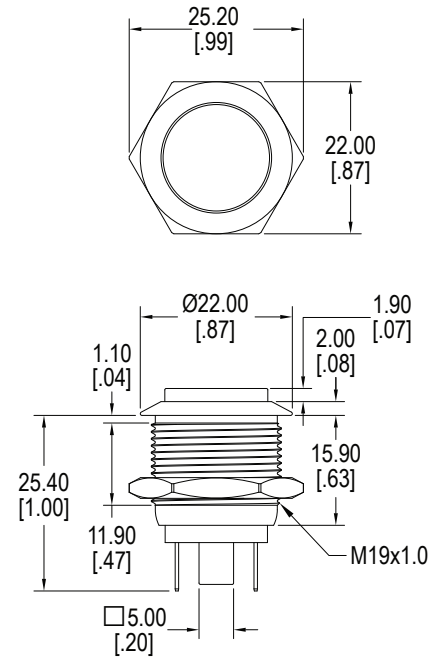

Raised

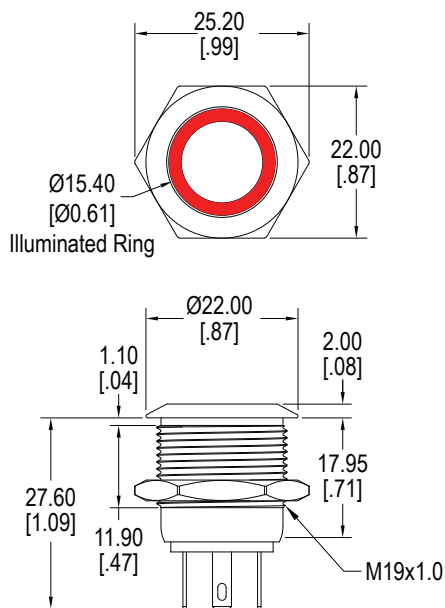


Flush, Ring Illuminated

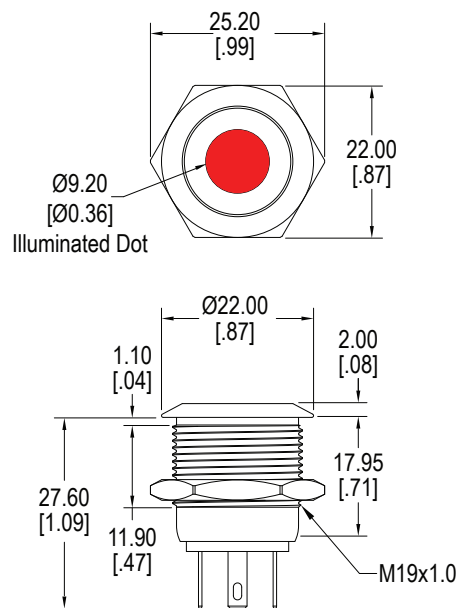


Flush, Dot Illuminated


16mm - Terminal Options




Screw Terminals




Solder Lug




Quick Connect



LED Screw Terminals




RGB Solder Lug




RGB Quick Connect


19mm - Terminal Options




Screw Terminals




Solder Lug/.110" Quick Connect






19mm - Terminal Options

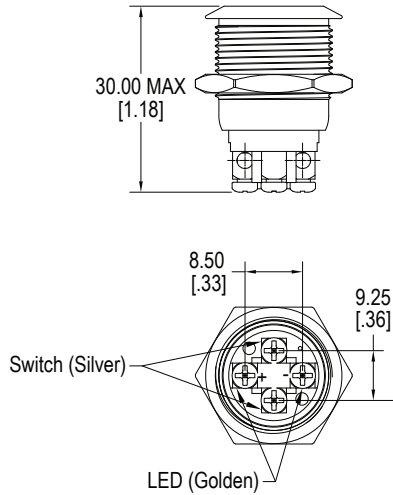


Screw Terminals with LED

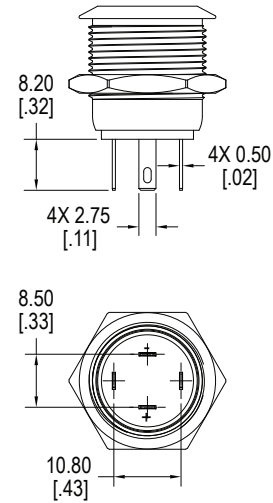


Solder Lug / .110" Quick Connect with LED


Schematics




No LED



Single LED




Dual LED




RGB LED

Panel Cutout




16mm




19mm

16mm - Bezel Detail




Standard Bezel

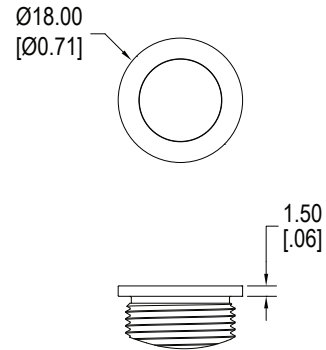


Straight Bezel

19mm - Bezel Detail

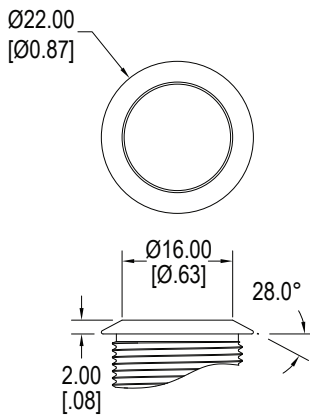

Standard Bezel

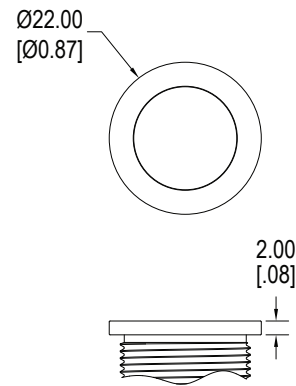

Straight Bezel

LED Characteristics

LED Ratings		Color						
		R	Y	G	B	O	W	Units
Reverse Voltage	V_R	5	5	5	5	5	5	V
Forward Current (avg)	I_F	25	25	30	30	25	30	mA
Forward Current (peak)	I_{FS}	120	120	160	160	120	160	mA
Reverse Current $V_R = 5V$	I_R	10	10	10	10	10	10	μA
Power Dissipation	P_T	80	80	120	120	80	120	mW
Operating & Storage Temperature	T_A	-40 ~ +85						C°
Forward Voltage (typ) $I_F = 20mA$	V_F	2.1	2.1	3.3	3.3	2.0	3.0	V
Forward Voltage (max) $I_F = 20mA$	V_F	2.4	2.5	3.6	3.6	2.3	3.6	V
Wavelength at Peak Emmission $I_F = 20mA$	λ_P	635	592	516	463	606	n/a	nm
Spectral Line Half-Width $I_F = 20mA$	$\Delta\lambda$	14	12	28	20	12	n/a	nm
Luminous Intensity, $I_F = 20mA$	LI	120	120	170	100	120	700	mcd
Viewing Angle	Θ	145	145	145	145	145	145	deg