

## Features

- Small size and light weight
- F class insulation
- Popular PC board mounting
- UL/CUL recognized



## Contact Data\*

UL Contact Rating	15A@125VAC, General Purpose, 30K cycles, 105°C
	10A@120VAC, Resistive, 10K cycles, 105°C
	10A@277VAC, General Purpose, 100K cycles, 105°C NO only
	7A@240VAC, Resistive, 10K cycles, 105°C
	7A@30VDC, General Purpose, 100K cycles, 105°C
	1/8hp, 125VAC, 100K cycles, 40°C
	1/8hp, 277VAC, 100K cycles, 40°C
	60W, 120VAC, Ballast, 25K cycles, 85°C
	150W, 120VAC, Electronic Ballast, 25K cycles, 85°C
TV/5, 125VAC, 25K cycles, 85°C	

Contact Arrangement	1A = SPST N.O. 1C = SPDT
Contact Resistance	< 30 milliohms initial
Contact Material	AgSnO <sub>2</sub>

## Coil Data\*

Coil Voltage VDC		Coil Resistance Ω +/- 10%	Pick Up Voltage VDC (max)	Release Voltage VDC (min)	Coil Power W	Operate Time ms	Release Time ms
Rated	Max		75% of rated voltage	10% of rated voltage			
		.36W					
3	3.9	25	2.25	0.3	.36W	10	10
5	6.5	69	3.75	0.5			
6	7.8	100	4.50	0.6			
9	11.7	225	6.75	0.9			
12	15.6	400	9.00	1.2			
18	23.4	900	13.50	1.8			
24	31.2	1600	18.00	2.4			
48	62.4	6400	36.00	4.8			

## General Data\*

Electrical Life @ rated load	100K cycles, average	
Mechanical Life	500K cycles, average	
Insulation Resistance	100M Ω min. @ 500VDC initial	
Dielectric Strength	Coil to Contact	1500V rms min. @ sea level initial
	Contact to Contact	750V rms min. @ sea level initial
Shock Resistance	10G	
Vibration Resistance	1.5mm double amplitude 10~55Hz	
Operating Temperature	-40°C to +125°C	
Storage Temperature	-40°C to +155°C	
Solderability	260°C for 5 s	
Weight	9g	


\* Values can change due to the switching frequency, desired reliability levels, environmental conditions and in-rush load levels. It is recommended to test actual load conditions for the application. It is the user's responsibility to determine the performance suitability for their specific application. The use of any coil voltage less than the rated coil voltage may compromise the operation of the relay.

## Ordering Information

1. Series	J107	1C	S	12VDC	.36
J107					
2. Contact Arrangement					
1A = SPST N.O.					
1C = SPDT					
3. Sealing Option					
S = Sealed					
4. Contact Rating					
3VDC					
5VDC					
6VDC					
9VDC					
12VDC					
18VDC					
24VDC					
48VDC					
6. Coil Power					
.36 = .36W					


## Dimensions

Units = mm

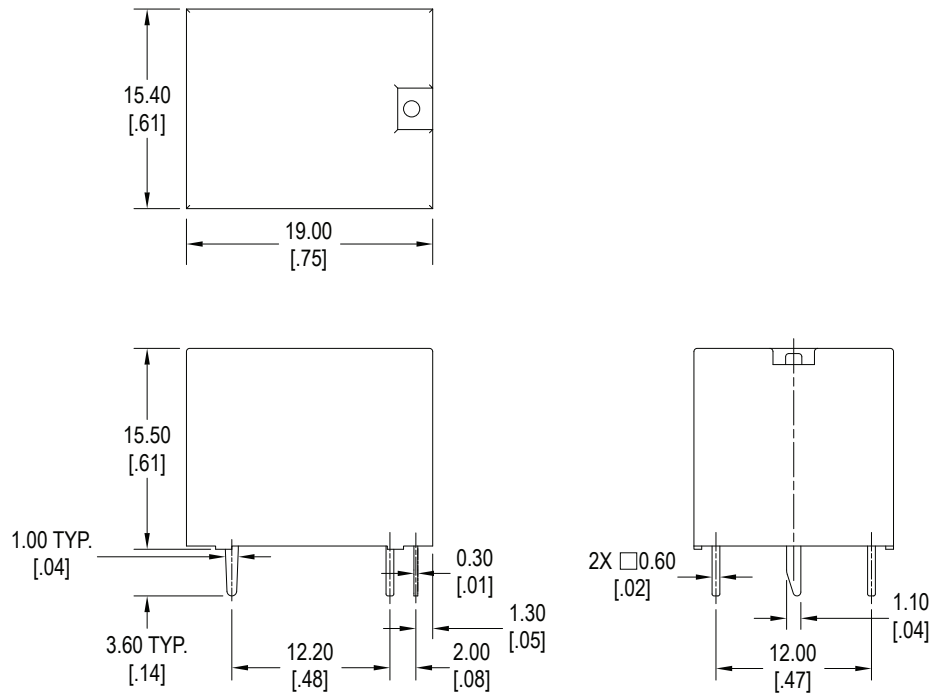


## Schematics & PC Layouts

Bottom Views

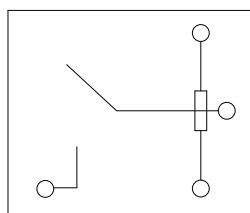

1A



1C

