

**NOTES:**

**1. ELECTRICAL:**

1.1 CONTACT CAPACITY .25 A @ 60 VAC., 3 VA MAXIMUM.

1.2 CONTACT RESISTANCE 30 OHM MAX.

**2. OPERATE:**

2.1 MAXIMUM DIFFERENTIAL ANGLE 15 DEG.

2.2 OPERATE TEMPERATURE RANGE -20 DEG. F. TO 175 DEG. F.

**3. HOUSING MATERIAL ABS COLOR BLUE.**

**4. LEADS 10" LONG PVC INSULATION**




2 CONDUCTOR WITH OUTER JACKET.

**5. MOUNTING HOLES WILL ACCEPT SCREWS**

UP TO .125 (3.17) DIA.

**6. ALL DIMENSIONS IN INCHES AND (mm).**

REV.	DATE	REVISION RECORD	DR.
A	05/15 2000	ORIGINAL	S.H.

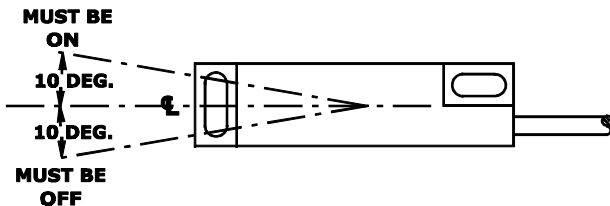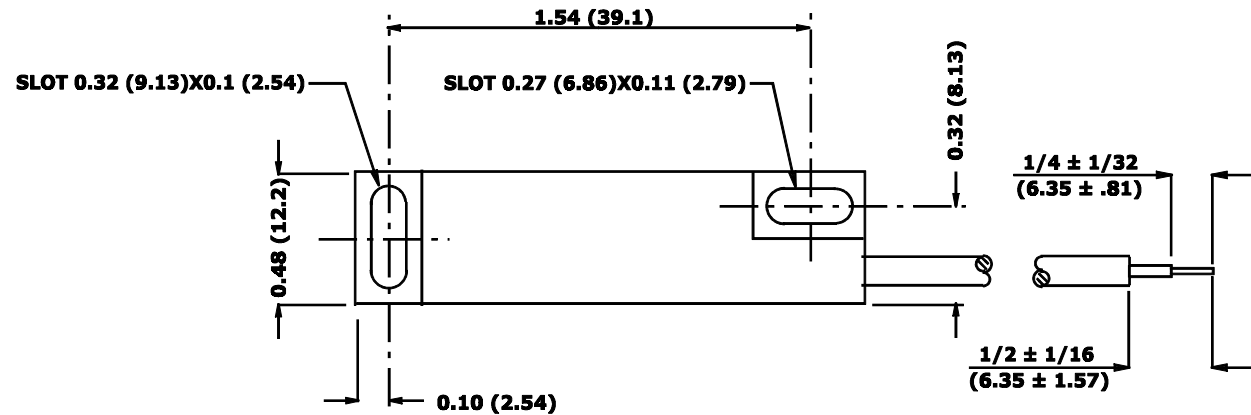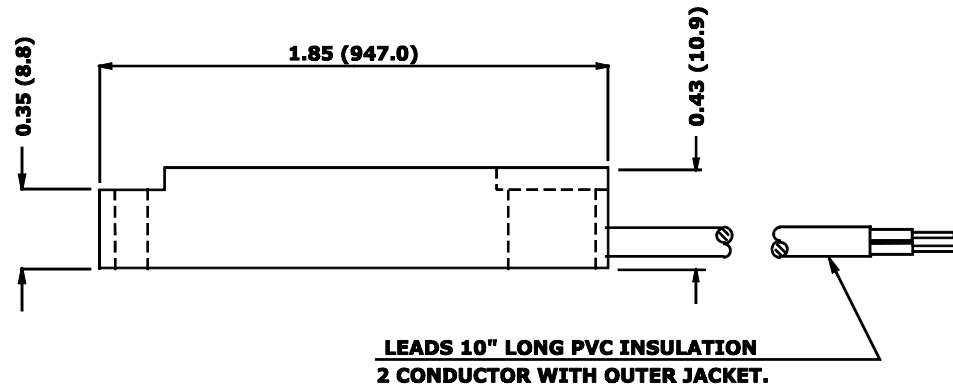

**COMUS INTERNATIONAL**

454 ALLWOOD RD. CLIFTON, NJ 07012 U.S.A. PH. (973) 777 - 6900

<b>TOLERANCES</b> (except as noted)  <b>DECIMAL</b> ± .01 (.254) 2 Digit ± .005 (.127) 3 Digit  <b>FRACTIONAL</b> ± 1/64 (.397) <b>ANGULAR</b> ± 1/2 °	REF.:	SCALE: NONE	DRAWN BY: S.H.	APPROVED:
	DATE:			
<b>TITLE: ENCAPSULATED NON - MERCURY TILT SWITCH</b>		<b>DATE: 05/15/00</b>		
		<b>DRAWING NUMBER:</b>		<b>CW1300-90</b>