
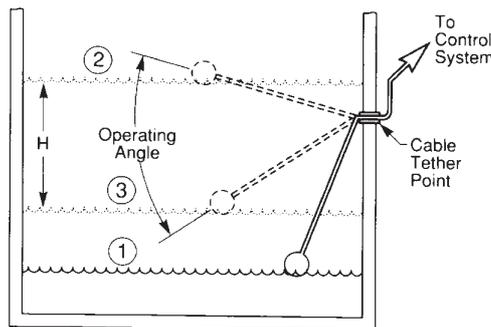


Product Data Sheet

Part Number: FP10
Float Switches - Plastic

PICTURE **DIMENSIONS**

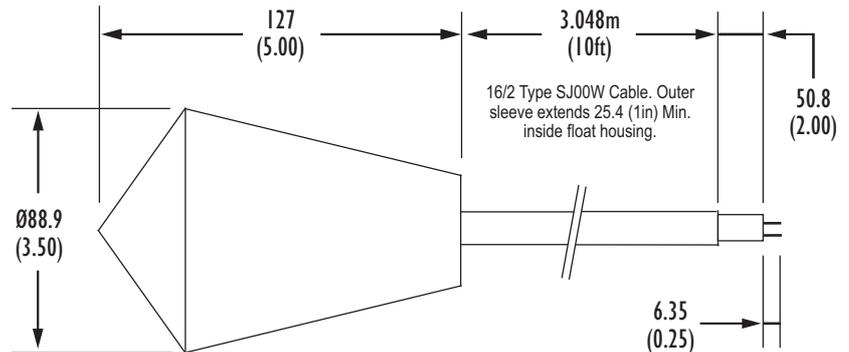

Drawings not to scale
All dimensions in mm(inches) nominal

FIXING INSTRUCTIONS

For normally open float
LEVEL 1 = Contact Open
LEVEL 2 = Contact Closes as level rises
LEVEL 3 = Contact opens as level falls
Distance H will depend on the operating angle and cable length from float to tether point.

SPECIFICATIONS		
Contact Form/Style		1 Contact
Switching Voltage	Max. Vac	240 Vac Max.
Switching Capacity	Max. VA	5A 2400Vac / 3A 240 Vdc
Switching Resistance	Max. Ohms	3.0 .
Operating Temperature	Max. Deg.°C	70
Differential Angle	(TYP) Deg.°C	10
Case Material		Urethane rigid moulded foam with PVC coating

REV. NO.	REVISION NOTE	DATE	SIGNATURE
E	Datasheet Redesign	May 16, 2008	LG

Take a look at our variety of products



As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and the details of our full design and manufacturing service. All products are supplied to our standard conditions of sale unless otherwise agreed in writing.

©2008 Copyright Comus International Inc.
454 Allwood Rd, Clifton, NJ 07012, USA.
Phone: (1) 973 777 6900 Fax: (1) 973 777 8405 Website: www.comus-intl.com
UK: +44 (0)1255 862236 - Belgium: + 32 (0)12 390400 - France: + 33 (0) 1 43 96 86 10