


Product Data Sheet

Part Number: HFP21

Float - Reed Switch - Plastic

PICTURE DIMENSIONS

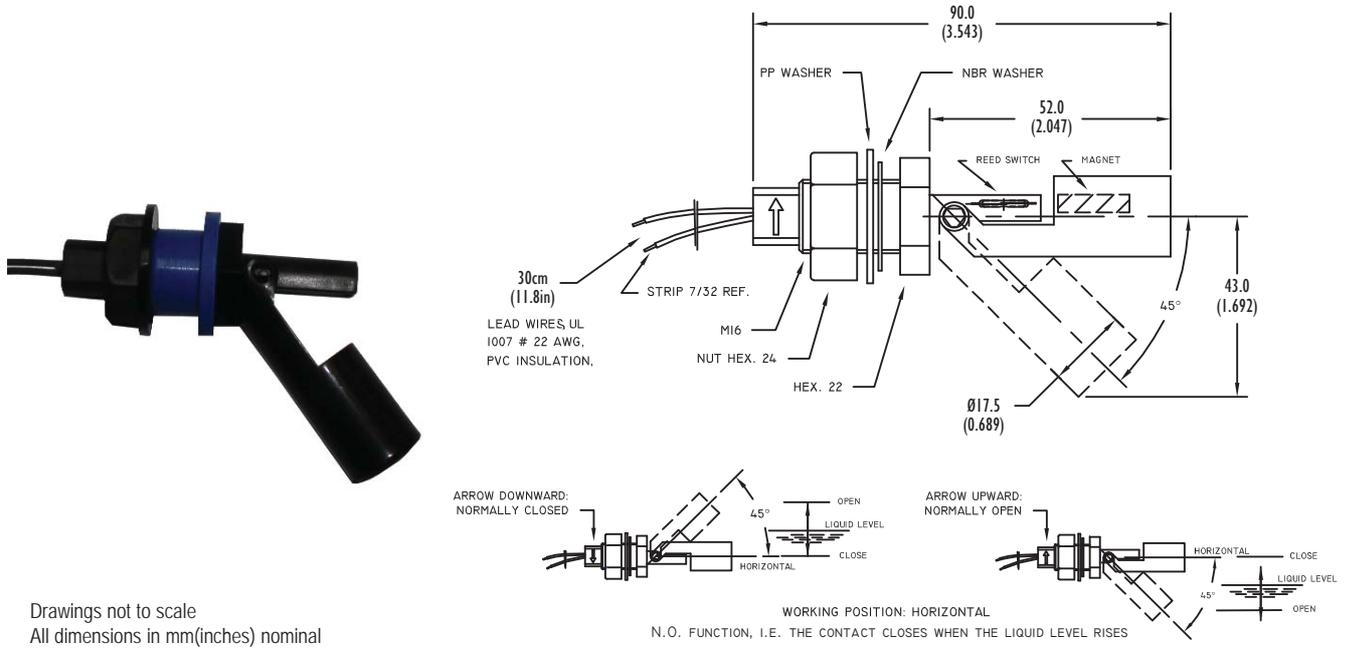

Drawings not to scale
All dimensions in mm(inches) nominal

SPECIFICATIONS

Contact Form		Installation Dependant
Switching Voltage	Max. V	240 Vac / 200 Vdc
Switching Current	Max. A	0.5
Carry Current	Max. A	1.0
Switching Capacity	Max. VA	50W
Contact Resistance	Max. mOhms	200
Lead Wire		XLPE AWG22
Reversible Switch Action		YES
Operating Pressure	Max. Kg/cm ²	4.0
Operating Temperature	Deg.°C	-20° +80°
Material		Polypropylene
Suitable Specific Gravity		0.75
Weight	g.	22
Mounting Hole Diameter	mm.	16.0

REV. NO.	REVISION NOTE	DATE	SIGNATURE
B	Datasheet Redesign	May 29, 2008	LG

Take a look at our variety of products



As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and the details of our full design and manufacturing service. All products are supplied to our standard conditions of sale unless otherwise agreed in writing.

©2008 Copyright Comus International Inc.
454 Allwood Rd, Clifton, NJ 07012, USA.
Phone: (1) 973 777 6900 Fax: (1) 973 777 8405 Website: www.comus-intl.com
UK: +44 (0)1255 862236 - Belgium: + 32 (0)12 390400 - France: + 33 (0) 1 43 96 86 10