

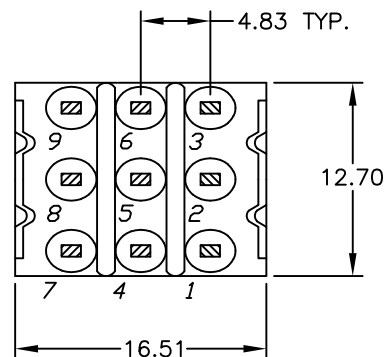


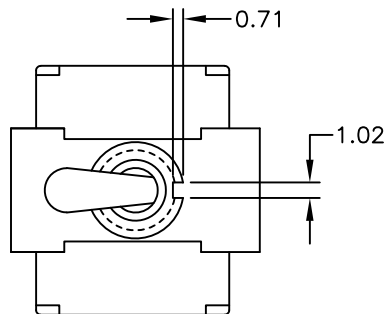

VIEW A-A

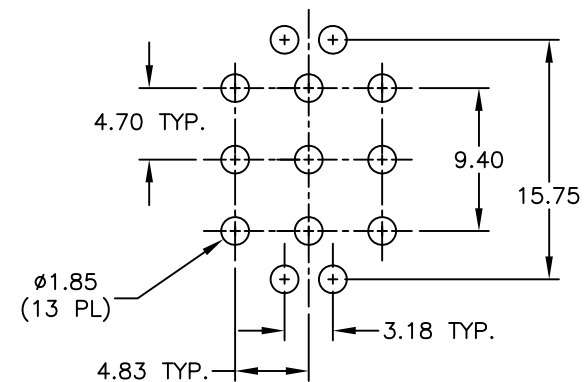

RECOMMENDED PCB LAYOUT

PDS. 1 PDS. 2 PDS. 3

25°

E-SWITCH MARKING
ON OPPOSITE SIDE



EPOXY SEAL

0.76 X 1.27
(9 PL)

4.70 TYP.

9.40

15.75

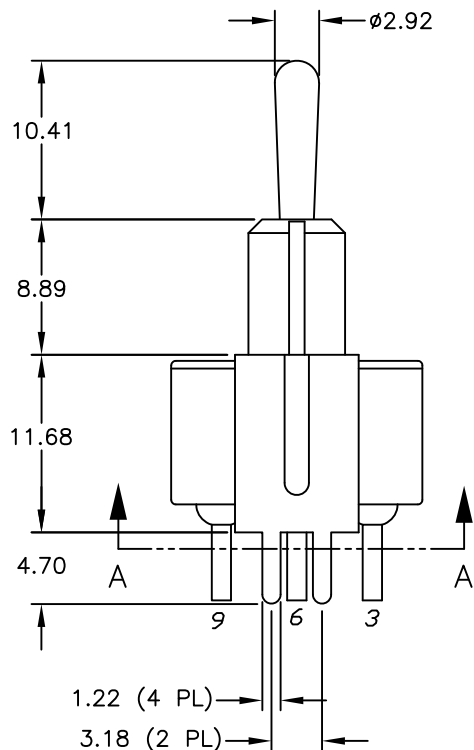

CIRCUIT: 3PDT

SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
ON	NONE	ON
2-3,5-6 8-9	OPEN	2-1,5-4 8-7

CONTACT CONFIGURATION

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: $X.X \pm 0.4$, $X.XX \pm 0.25$
3. TERM. NOS. FOR REF ONLY
4. RATING: 0.4VA MAX @20VAC OR @20VDC
5. ELECTRIC LIFE: 50,000 MAKE AND BREAK CYCLES AT FULL LOAD
6. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN
7. DIELECTRIC STRENGTH: 1,000V RMS @SEA LEVEL
8. OPERATING TEMP: -30°C TO $+85^{\circ}\text{C}$

E-SWITCH®

TITLE

100 3P-1 T1 B2 VS2 R E

SCALE

2:1

DATE

11/13/00

DR

PML

DWG

T131024

REV

A

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED

A	11054	RELEASED FOR PRODUCTION	11/13/00	PML
REV.	ECN No.	DESCRIPTION	DATE	CHKD