
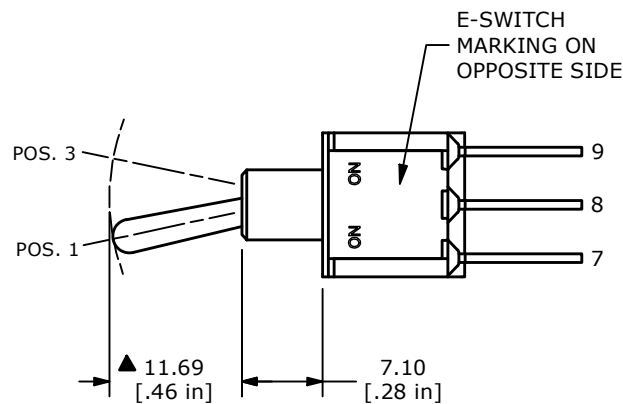
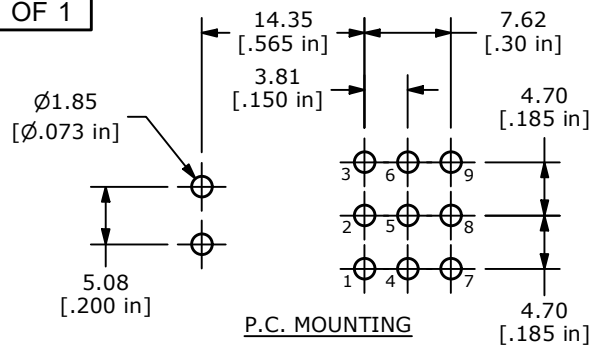
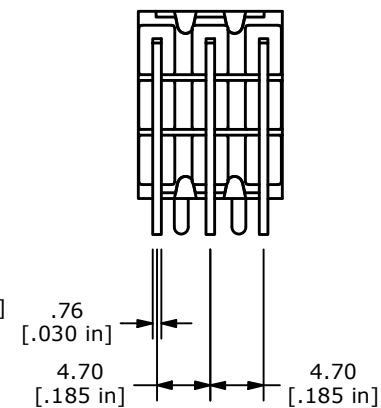
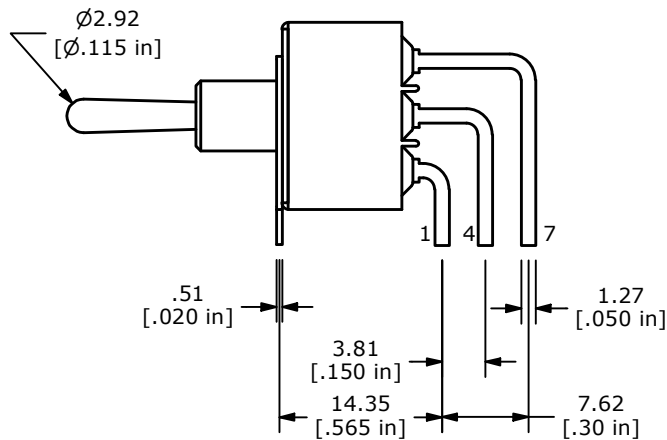
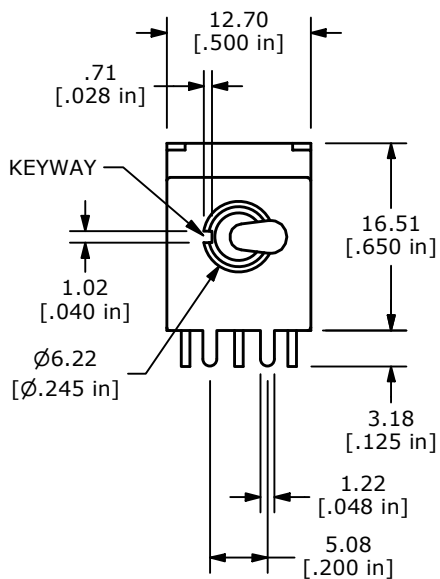


▲ SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
		
ON	NONE	ON
2-3, 5-6, 8-9	N/A	2-1, 5-4, 8-7

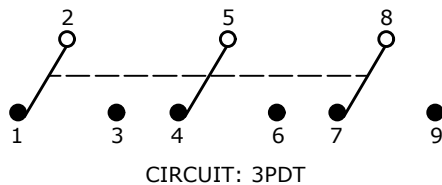

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF ONLY
- ▲ 4. PLATING MATERIAL: SILVER
5. RATING: 2Amps @ 250VAC
5Amps @ 120 VAC or 28 VDC
6. ELECTRICAL LIFE: 6,000 make-and-break cycles
at full load.
7. INSULATION RESISTANCE: 1,000 Mega-ohm min.
8. DIELECTRIC STRENGTH: 1,000 V RMS @ sea level
9. OPERATING TEMP.: -40°C to 85°C
10. ▲ DENOTES CRITICAL PARAMETER.

REV	ECO NO	DESCRIPTION	DATE	BY	 E-SWITCH®					OBJECT ID
B	ECO-102745	print update	05/15/24	MW						000024406
					TITLE 1003P1T1B4M6QE					
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE 3:2	DATE 12/15/2003	DR AR	DWG T131016	REV B	