


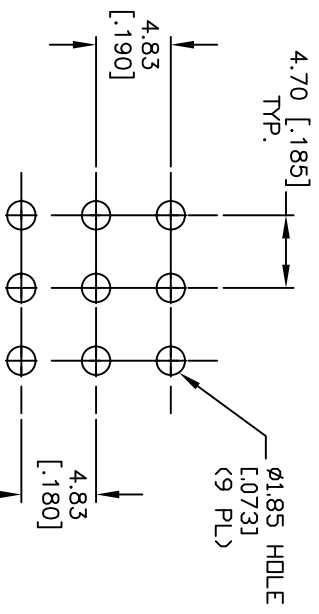


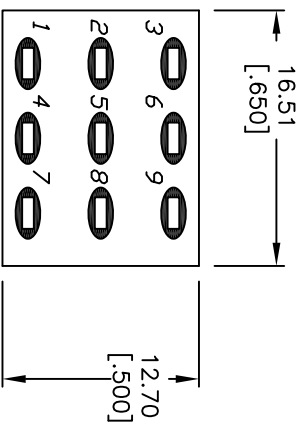

RECOMMENDED P.C.B. LAYOUT
SCALE: 2:1

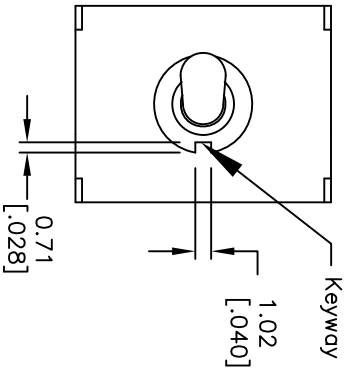

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
2-3,5-6 8-9	OPEN	2-1,5-4 8-7

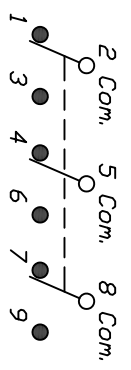

CIRCUIT: 3PDT

NOTES:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
- TERM. NOS. FOR REF. ONLY
- RATING: 0.4VA @20V max. AC or DC
- MATERIALS: FIXED TERM. & MOVING CONTACT:
Copper Alloy W/Gold plate over
Nickel plate.
- ELECTRICAL LIFE: 50,000 make-and-break
cycles at full load.
- INSULATION RESISTANCE: 1,000M ohm min.
- DIELECTRIC STRENGTH: 1000V RMS @sea level
- OPERATING TEMP.: -30°C to 85°C

B	24097	UPDATED DIM 5.10 AND 6.60	11/08/19	MJR
A	12518	RELEASED FOR PRODUCTION	10/28/02	CJB
REV.	ECN No.	DESCRIPTION	DATE	CHKD

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED

TITLE				
100 3P-3 T2 B2 M2 R E (GOLD CONTACTS)				
E-SWITCH®				
SCALE	DATE	DR	DWG	REV
2:1	10/28/02	CB	T133031	B