
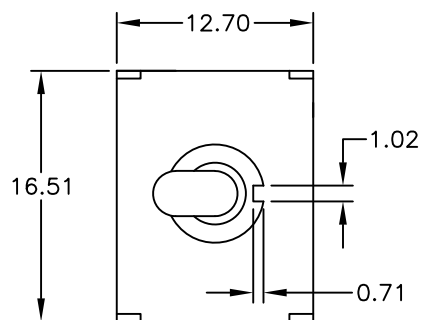

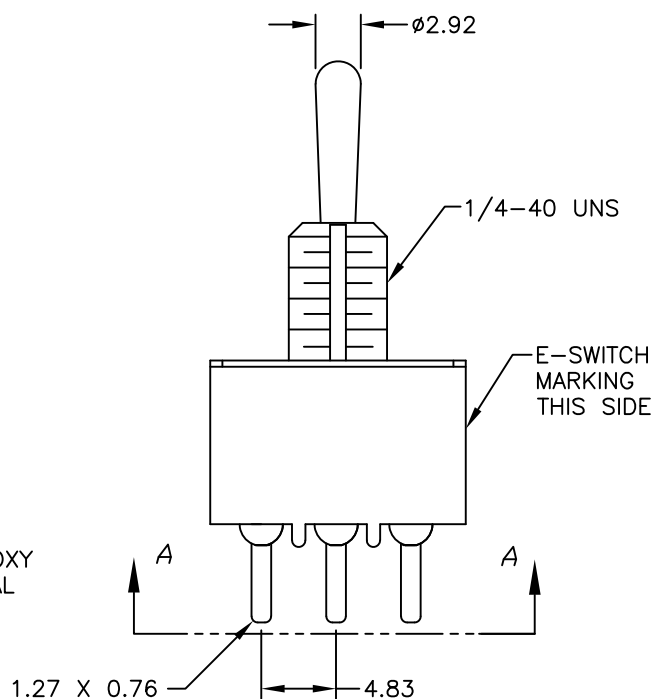


VIEW A-A

SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
ON	OFF	<ON>
2-3,5-6 8-9	OPEN	2-1,5-4 8-7

< >= MOMENTARY

CONTACT CONFIGURATION

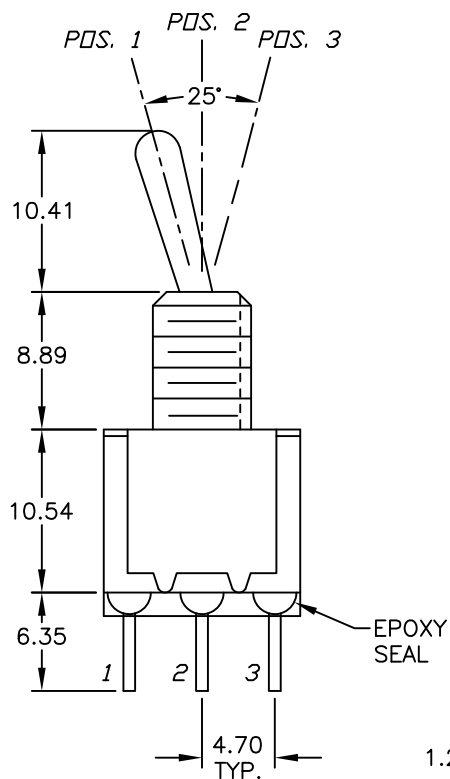

CIRCUIT: 3PDT

NOTES:

- ALL DIMENSIONS IN MM
- GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
- TERMINAL NUMBERS FOR REF ONLY
- RATING: 5 AMPS @ 120VAC OR 28VDC;
2 AMPS @ 250VAC
- ELECTRIC LIFE: 50,000 make-and-break cycles
at full load.
- INSULATION RESISTANCE: 1,000 Mega-ohm min.
- DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
- OPERATING TEMP.: -30°C to 85°C

E-SWITCH®

B				
A	1111	RELEASED FOR PRODUCTION	12/12/00	CJB
REV.	ECN No.	DESCRIPTION	DATE	CHKD

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED

TITLE

100 3P5 T1 B1 M2 Q E

SCALE

2:1

DATE

12/12/00

DR

CJB

DWG

T135011

REV

A