



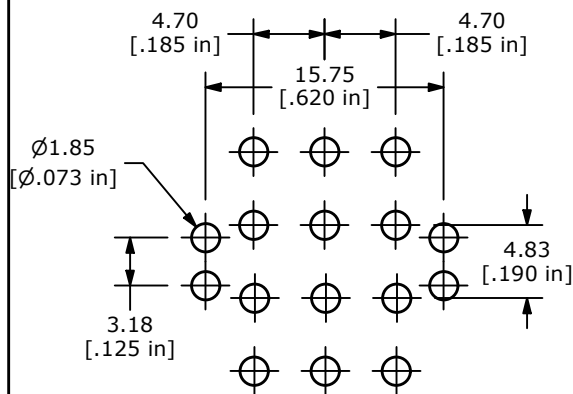

RECOMMENDED
PANEL MOUNTING



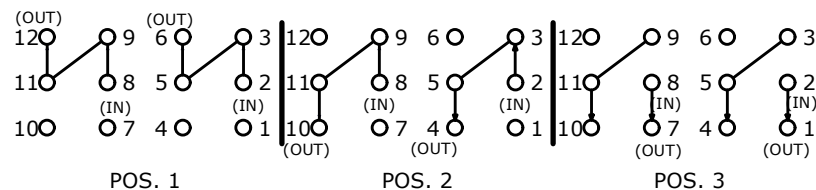


4PDT 3 WAY CIRCUIT
NOTE: JUMPER PIN 3 TO 5

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: $x.x = \pm 0.4$
 $x.xx = \pm 0.25$
3. TERM. NUMBERS FOR REFERENCE ONLY
4. RATING: 2 AMPS @250VAC
5 AMPS @120VAC OR 28VDC
5. FIXED TERM. & MOVING CONTACT:
COPPER ALLOY W/SLIVER PLATE OVER NICKEL PLATE
6. ELECTRICAL LIFE: 40,000 make and break cycles at full load
7. INSULATION RESISTANCE: 1,000M OHM MIN.
8. DIELECTRIC STRENGTH: 1,000V RMS @ SEA LEVEL
9. OPERATING TEMP: -30°C to 85°C
10. ▲ DENOTES CRITICAL PARAMETER
11. CONTACT MATERIAL: SILVER

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	ON	ON
2-3, 5-6, 8-9, 11-12	2-3, 5-4, 8-9, 11-10	2-1, 5-4, 8-7, 11-10

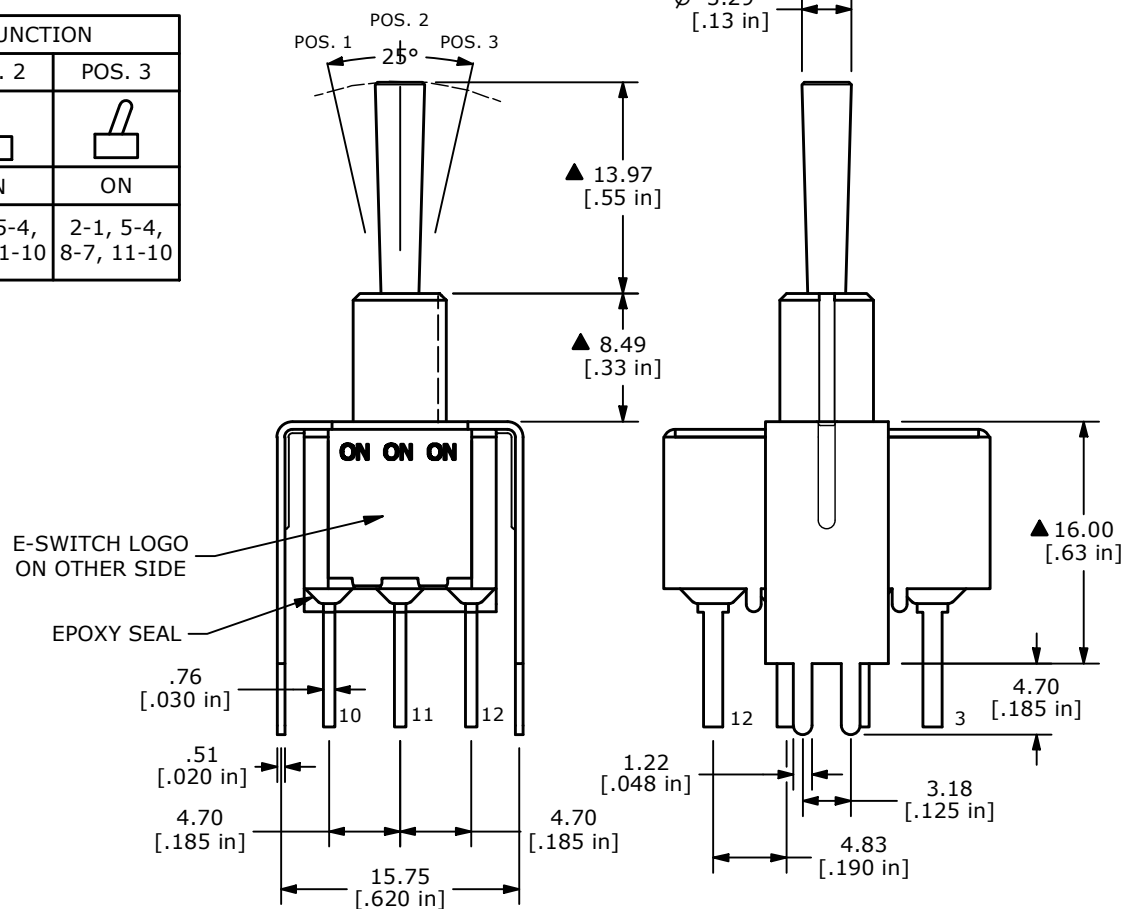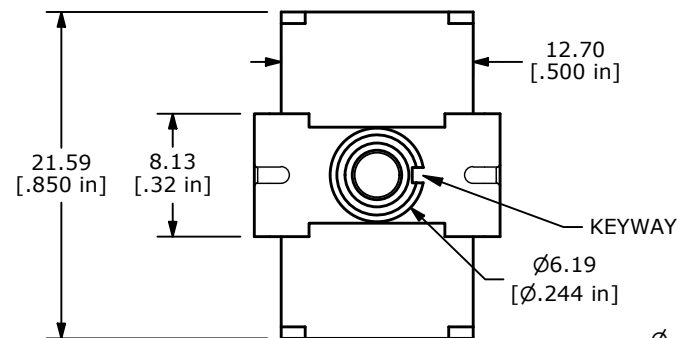

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
A	ECO-100154	RELEASE	06/11/21	JM	TITLE 1004P6T3B2VS3QE				100116937
					SCALE	DATE	DR	DWG	REV
					2:1	6/8/2021	JM	T126072	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED