
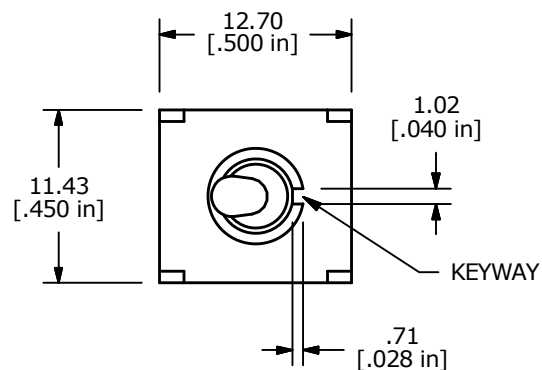
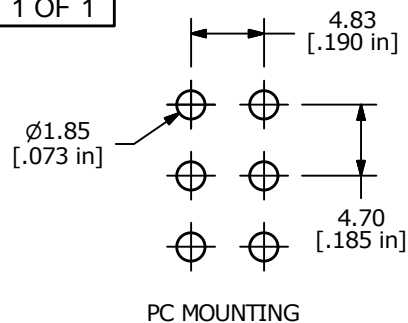




| SWITCH FUNCTION |        |          |
|-----------------|--------|----------|
| POS. 1          | POS. 2 | POS. 3   |
|                 |        |          |
| ON              | NONE   | ON       |
| 2-3, 5-6        | OPEN   | 2-1, 5-4 |



CIRCUIT: DPDT

## NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
- ▲ 4. PLATING MATERIAL: GOLD
5. RATING: 0.4 (VA) MAX. @20V MAX
6. ELECTRIC LIFE: 40,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
7. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
8. DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
9. OPERATING TEMP.: -30°C to 85°C
10. ▲ DENOTES CRITICAL PARAMETER.
11. 2002/95/EC (ROHS) COMPLIANT

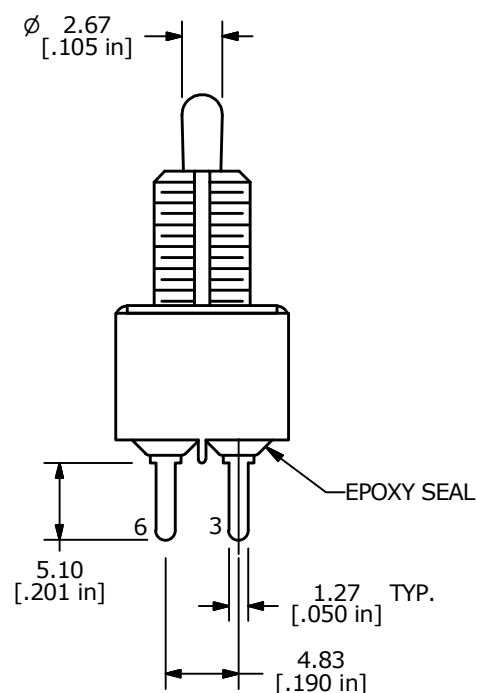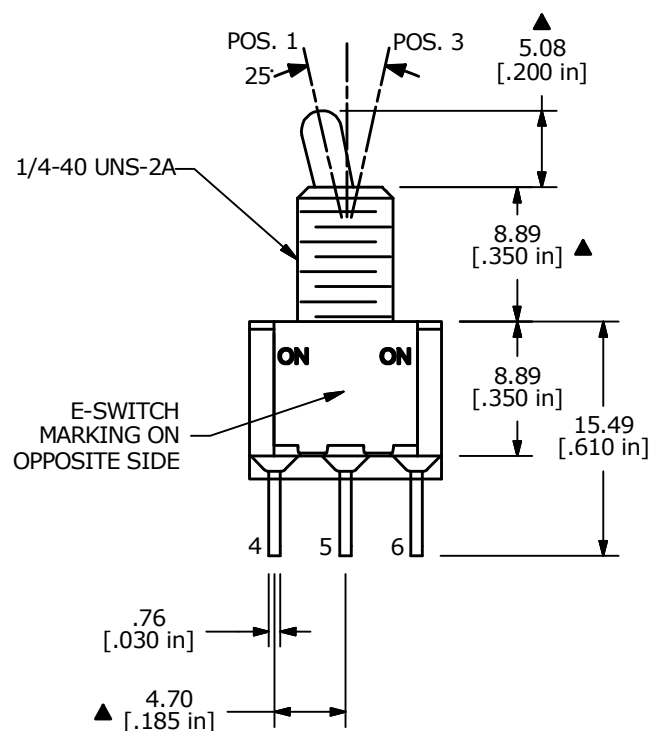

|     |        |                              |            |    |
|-----|--------|------------------------------|------------|----|
| B   | 21817  | 4.80 TO 5.10, 15.24 TO 15.49 | 3/31/15    | MW |
| A   | 16535  | RELEASED FOR PRODUCTION      | 10/17/2006 | TN |
| REV | PCR NO | DESCRIPTION                  | DATE       | BY |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY  
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE 100DP1T2B1M2RE

SCALE 2:1

DATE 10/17/2006

DR TN

DWG T121140

REV B