
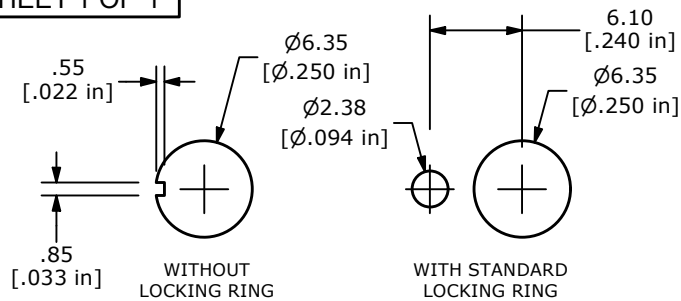
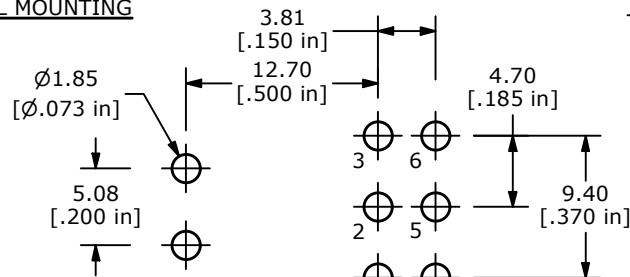

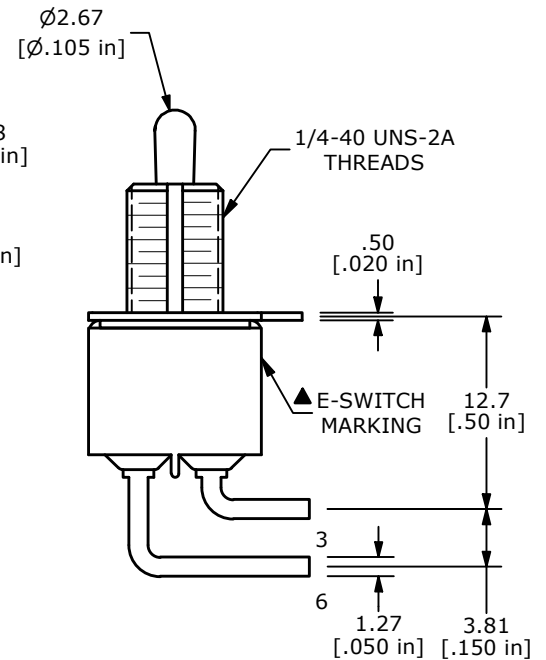
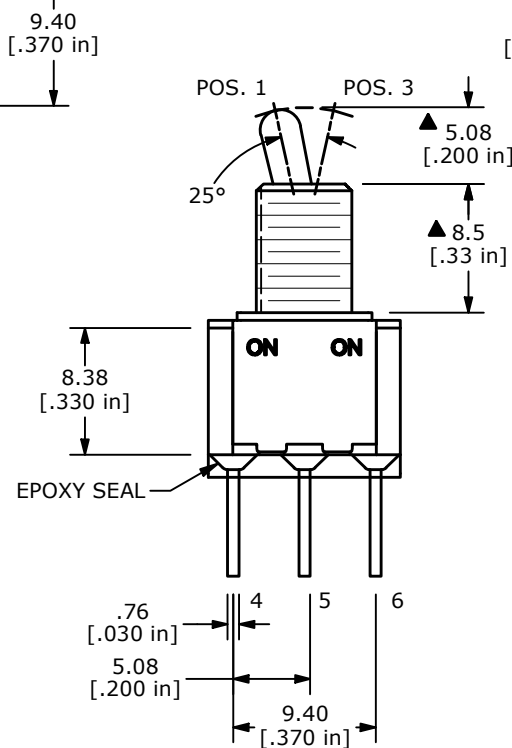
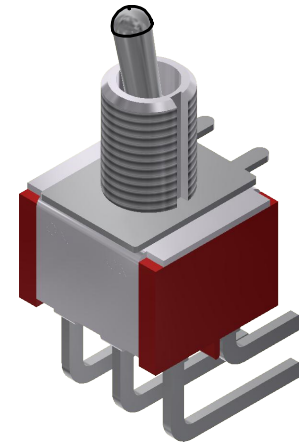


**RECOMMENDED PANEL MOUNTING**

| ▲ SWITCH FUNCTION |        |          |
|-------------------|--------|----------|
| POS. 1            | POS. 2 | POS. 3   |
|                   |        |          |
| ON                | NONE   | ON       |
| 2-3, 5-6          | N/A    | 2-1, 5-4 |

**RECOMMENDED PCB LAYOUT****CIRCUIT: DPDT****NOTE:**

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X =  $\pm 0.4$   
X.XX =  $\pm 0.25$
- TERMINAL NUMBERS FOR REF ONLY
- CONTACT MATERIAL: SILVER
- RATING: 2A @ 250 VAC  
5A @ 120 VAC OR 28 VDC
- ELECTRIC LIFE: 6,000 MAKE-AND-BREAK CYCLES  
AT FULL LOAD.
- INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
- DIELECTRIC STRENGTH: 1,000 V RMS @ SEA LEVEL
- OPERATING TEMP.: -40°C TO 85°C
- ▲ DENOTES CRITICAL PARAMETER.
- HARDWARE INCLUDED  
T100011 - LOCK WASHER - QTY 1  
T100015 - LOCK RING - QTY 1  
T100000 - HEX NUT - QTY 2

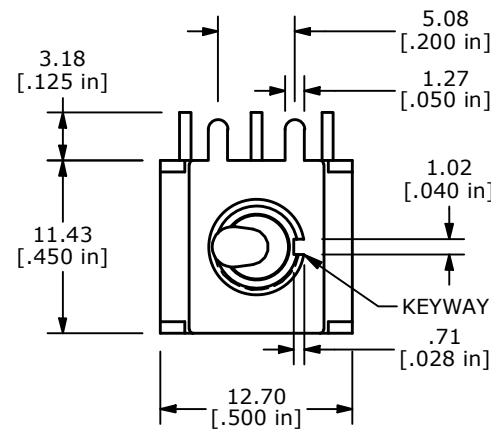

| REV | ECO NO     | DESCRIPTION       | DATE     | BY | <b>E-SWITCH®</b>       |          |    |          | OBJECT ID |
|-----|------------|-------------------|----------|----|------------------------|----------|----|----------|-----------|
| B   | ECO-102438 | 100 SERIES UPDATE | 02/20/24 | MR | TITLE 100DP1T2B1M6QE H |          |    |          | 000023160 |
|     |            |                   |          |    | SCALE                  | DATE     | DR | DWG      | REV       |
|     |            |                   |          |    | 2:1                    | 5/5/2020 | MW | ST121152 | B         |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED