



RECOMMENDED PANEL MOUNTING

▲ SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	NONE	ON
2-3, 5-6	N/A	2-1, 5-4




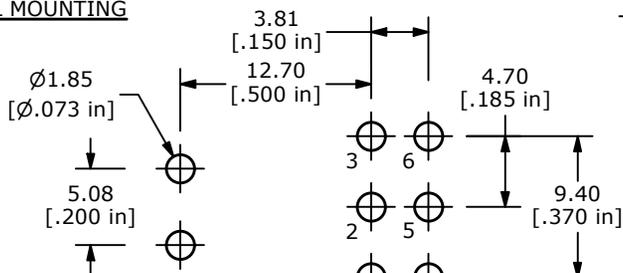


RECOMMENDED PCB LAYOUT

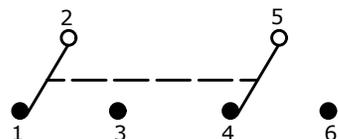

NOTE:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
- TERMINAL NUMBERS FOR REF ONLY
- CONTACT MATERIAL: GOLD
- RATING: 0.4 VOLT-AMPS (VA) MAX. @ 20V MAX. (AC OR DC)
- ELECTRIC LIFE: 6,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
- INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
- DIELECTRIC STRENGTH: 1,000 V RMS @ SEA LEVEL
- OPERATING TEMP.: -40°C TO 85°C
- ▲ DENOTES CRITICAL PARAMETER.
- HARDWARE INCLUDED
 T100011 - LOCK WASHER - QTY 1
 T100015 - LOCK RING - QTY 1
 T100000 - HEX NUT - QTY 2

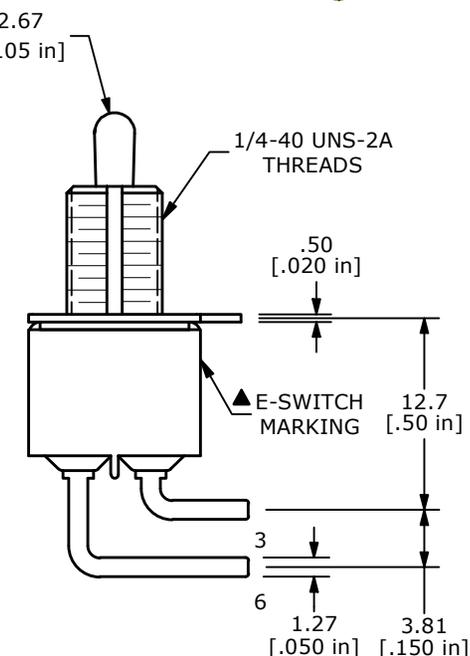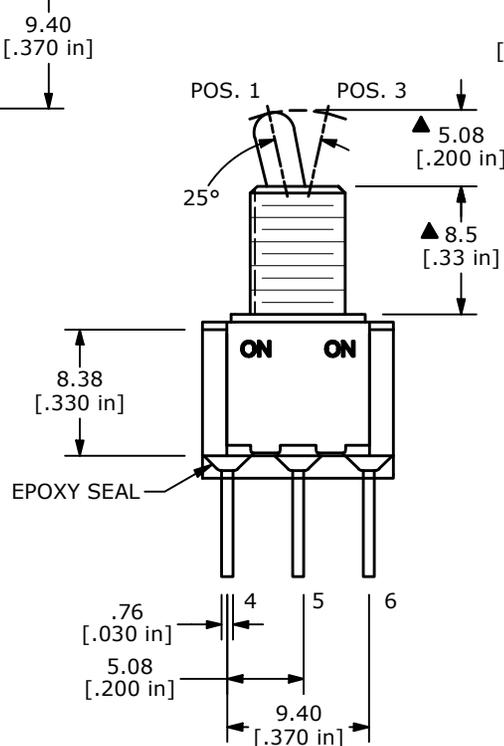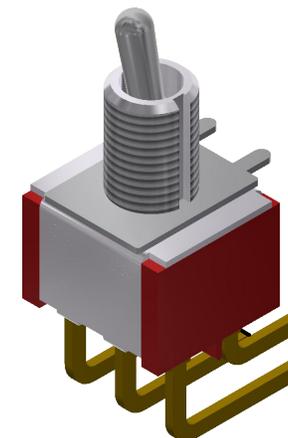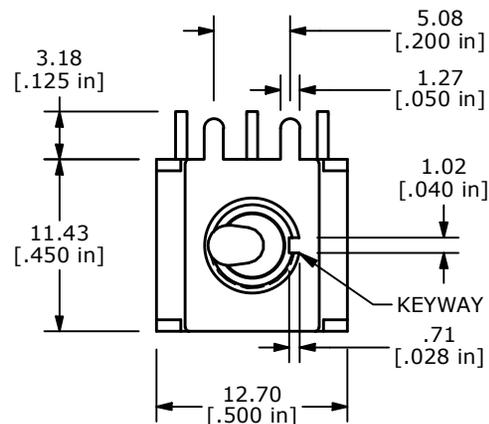

REV	ECO NO	DESCRIPTION	DATE	BY
B	ECO-102793	100 SERIES UPDATE	08/19/24	MR



OBJECT ID
000023161

TITLE 100DP1T2B1M6REH		SCALE 2:1	DATE 5/21/2020	DR MW	DWG ST121153	REV B
--------------------------	--	--------------	-------------------	----------	-----------------	----------