
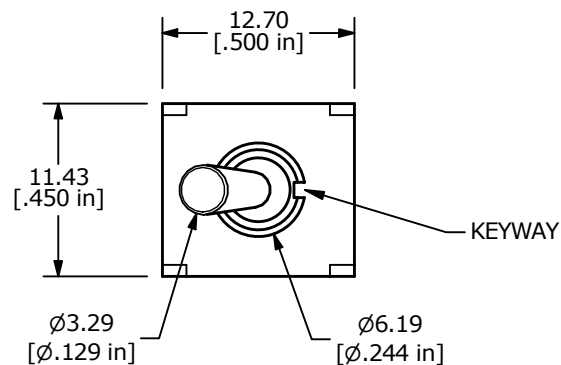
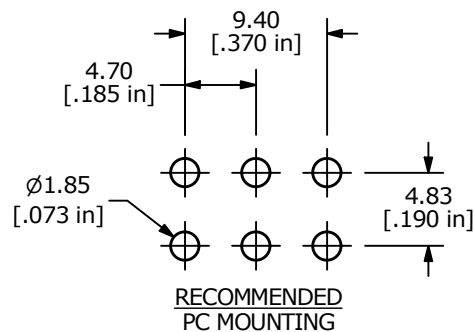


▲ SWITCH FUNCTION



| POS. 1   | POS. 2   |
|----------|----------|
|          |          |
| ON       | ON       |
| 2-3, 5-6 | 2-1, 5-4 |



CIRCUIT: DPDT

## NOTE:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X =  $\pm 0.4$   
X.XX =  $\pm 0.25$
- TERMINAL NUMBERS FOR REF ONLY
- PLATING MATERIAL: SILVER
- RATING: 2 AMPS @ 250VAC  
5 AMPS @ 120VAC or 28VDC
- ELECTRIC LIFE: 40,000 MAKE-AND-BREAK CYCLES AT FULL LOAD
- INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
- DIELECTRIC STRENGTH: 1,000 V RMS @ SEA LEVEL
- OPERATING TEMP.: -30°C to 85°C
- ▲ DENOTES CRITICAL PARAMETER.

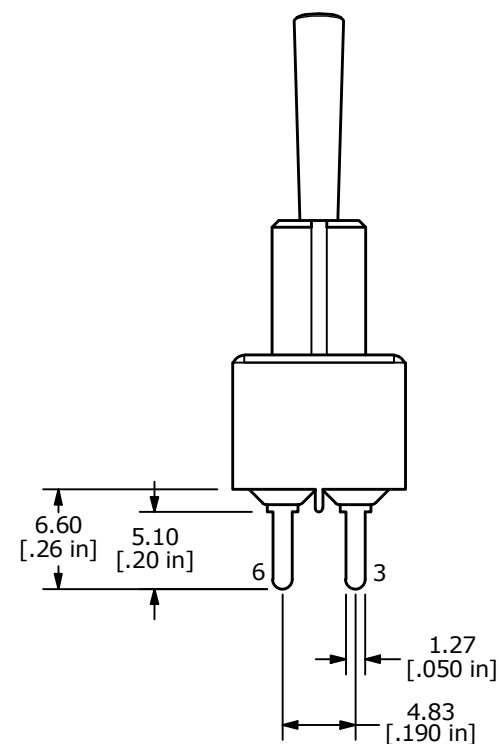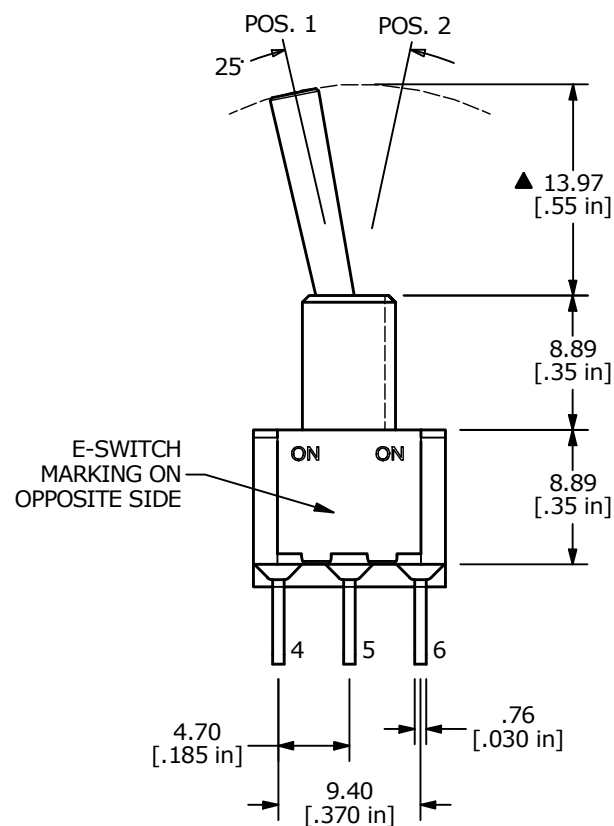

| REV                                                                                                          | ECO NO     | DESCRIPTION | DATE     | BY | E-SWITCH®            |            |    |         | OBJECT ID |
|--------------------------------------------------------------------------------------------------------------|------------|-------------|----------|----|----------------------|------------|----|---------|-----------|
| A                                                                                                            | ECO-100447 | Release     | 10/22/21 | MW | TITLE 100DP1T3B2M2QE |            |    |         | 100119861 |
|                                                                                                              |            |             |          |    | SCALE                | DATE       | DR | DWG     | REV       |
| THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED |            |             |          |    | 2:1                  | 10/20/2021 | MW | T121160 | A         |