

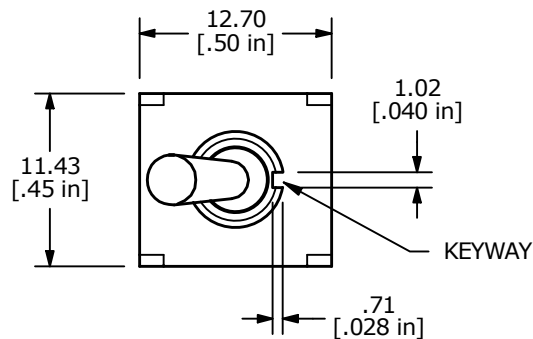
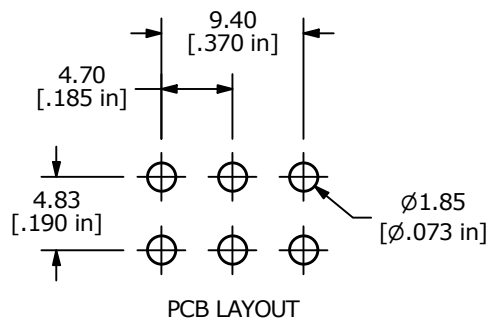


SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	N/A	ON
2-3 5-6	N/A	2-1 5-4



NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF ONLY
- ▲ 4. PLATING MATERIAL: SILVER
5. RATING: 2 AMPS @250VAC
5 AMPS @120VAC or 28VDC
6. ELECTRIC LIFE: 40,000 make-and-break cycles at full load.
7. INSULATION RESISTANCE: 1,000 Mega-ohm min.
8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
9. OPERATING TEMP.: -30°C to 85°C
10. ▲ DENOTES CRITICAL PARAMETER.
- ▲ 11. HARDWARE TO BE SHIPPED BULK:
T100000 HEXNUT - QTY 2
T100011 LOCKWASHER - QTY 1
T100015 LOCKRING - QTY 1

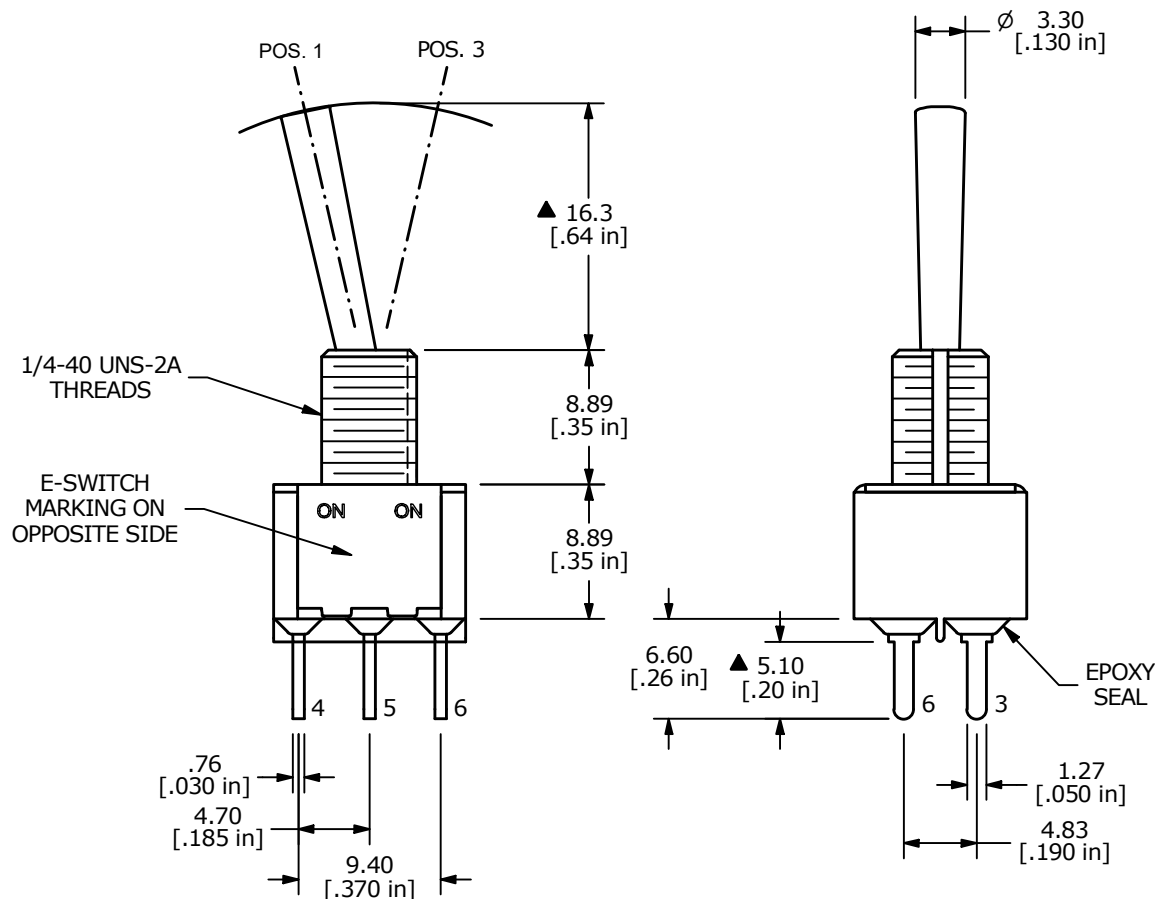

A	24673	RELEASE	1/15/21	MW
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE 100DP1T4B1M2QE H

SCALE 2:1	DATE 1/15/2021	DR MW	DWG ST121154	REV A
--------------	-------------------	----------	-----------------	----------