



SWITCH FUNCTION			
POS. 1	POS. 2	POS. 3	
ON	NONE	ON	ON
2-3, 5-6	N/A	2-1, 5-4	






CIRCUIT: DPDT

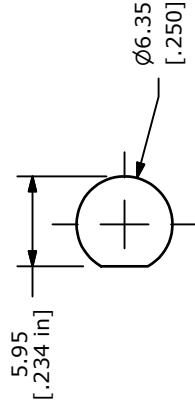

PANEL MOUNTING

- NOTE:
1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
 3. TERMINAL NUMBERS FOR REF ONLY
 4. PLATING MATERIAL: GOLD
 5. RATING: 0.4VA MAX @20V MAX (AC or DC)
 6. ELECTRIC LIFE: 40,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
 7. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
 8. DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
 9. OPERATING TEMP.: -30°C to 85°C
 10. ▲ DENOTES CRITICAL PARAMETER.
 11. 2002/95/EC (ROHS) COMPLIANT

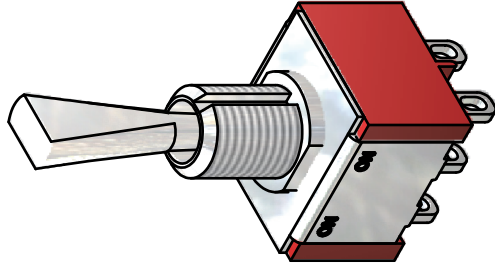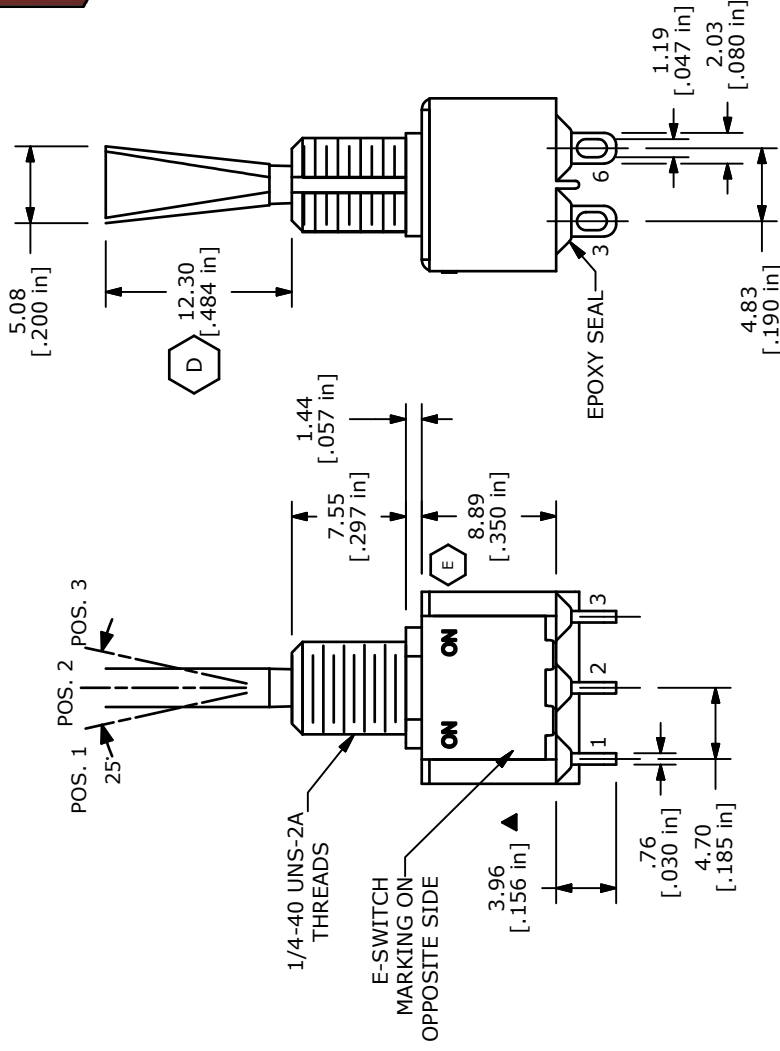

ISOMETRIC

E-SWITCH®

TITLE 100DP1T6B11M1RE

E	19555	UPDATED SWITCH FUNC. TO ON-ON WAS (ON)-(ON)	12/30/10	BGL
D	16312	CLEANED UP MODEL; ADDED "12.30" DIM.	8/15/06	BO
C	16141	REVISED AND REDRAWN	6/14/06	CT
REV	PCR NO	DESCRIPTION	DATE	BY
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED				

SCALE 2:1

DATE 5/29/1998

DR MM

DWG T121045

REV E