



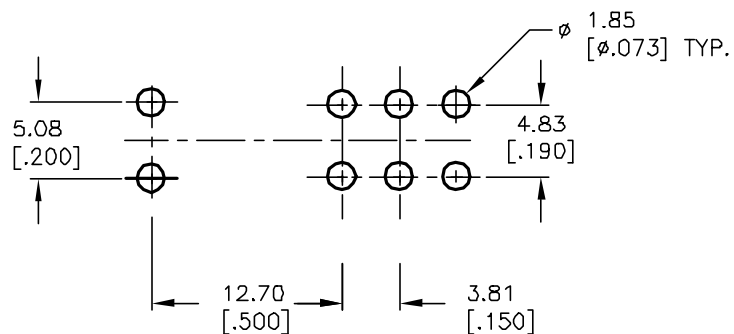

RECOMMENDED P.C.B. LAYOUT





CIRCUIT: DPDT
CONTACT CONFIGURATION

SWITCH FUNCTION ▲		
POS. 1	POS. 2	POS. 3
		
ON	NONE	ON
2-3,5-6	OPEN	2-1,5-4

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X= ± 0.4
X.XX= ± 0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 5A @120VAC OR 28VDC:
2A @250VAC.
5. FIXED TERM. & MOVING CONTACT:
Copper Alloy W/SILVER plate.
6. ELECTRICAL LIFE: 50,000 make-and-break cycles
at full load.
7. INSULATION RESISTANCE: 1,000M ohm min.
8. DIELECTRIC STRENGTH: 1,000V RMS @sea level.
9. OPERATING TEMP.: -30°C to +85°C.
10. ▲ DENOTES CRITICAL PARAMETER.

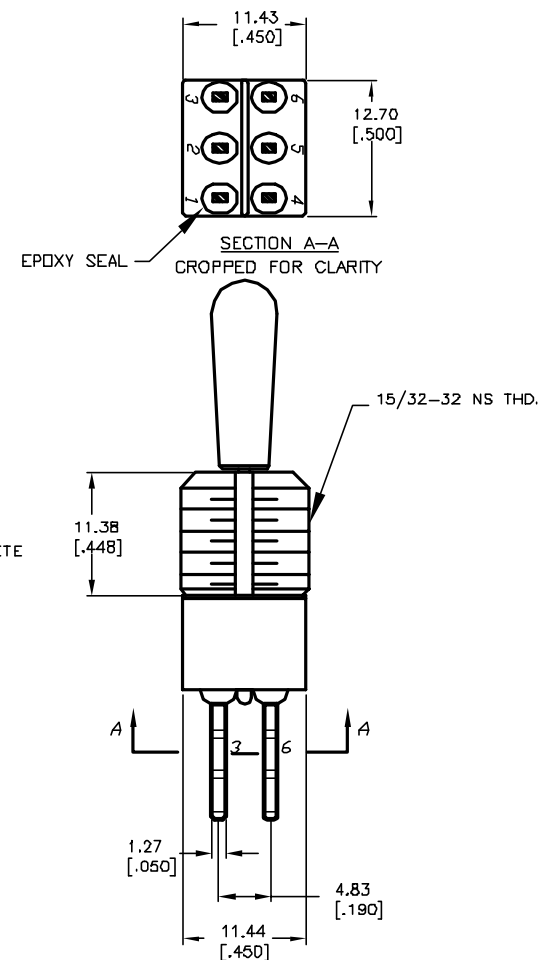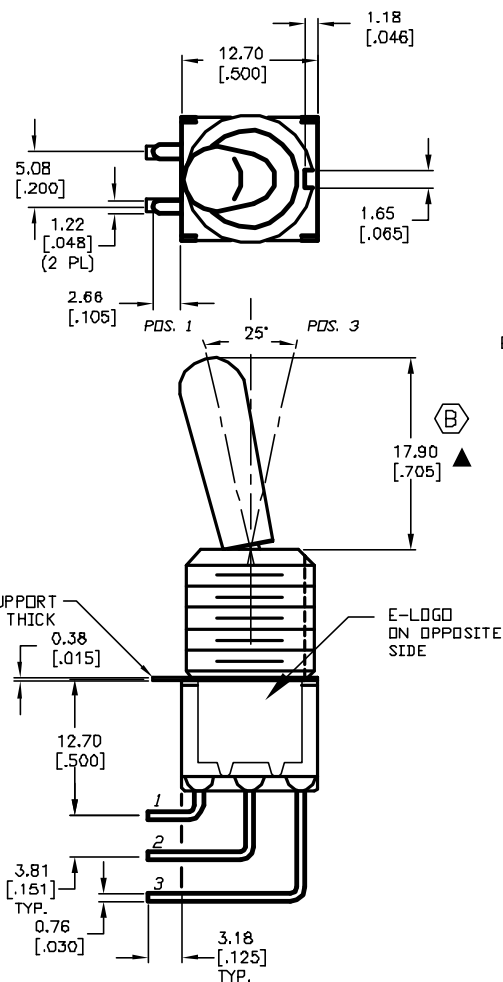

B	13145	REVISED ACTUATOR	5/16/03	AR
A	12804	NEW RELEASE	2/10/03	RC
REV.	ECN No.	DESCRIPTION	DATE	CHKD

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE					100 DP-1 T8 B13 M7 Q E				
SCALE		DATE		DR		DWG		REV	
2:1		2/10/03		RC		T121066		B	