



CIRCUIT: DPDT

SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
DN	NONE	<DN>
2-3,5-6	DPEN	2-1,5-4


< >=Momentary

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 5A @120VAC or 28VDC
2A @250VAC.
5. FIXED TERM. & MOVING CONTACT:
Copper Alloy w/Silver plate.
6. ELECTRICAL LIFE: 50,000 make-and-break cycles
at full load.
7. INSULATION RESISTANCE: 1,000M ohm min.
8. DIELECTRIC STRENGTH: 1,000V RMS @sec level.
9. OPERATING TEMP.: -30°C to +85°C.

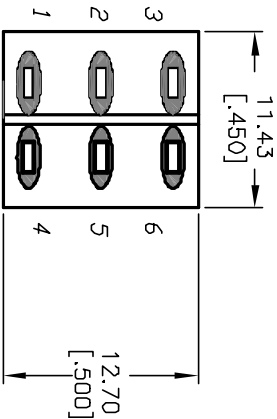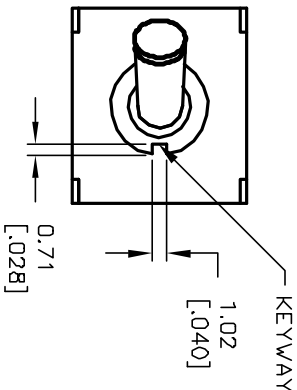

VIEW A-A

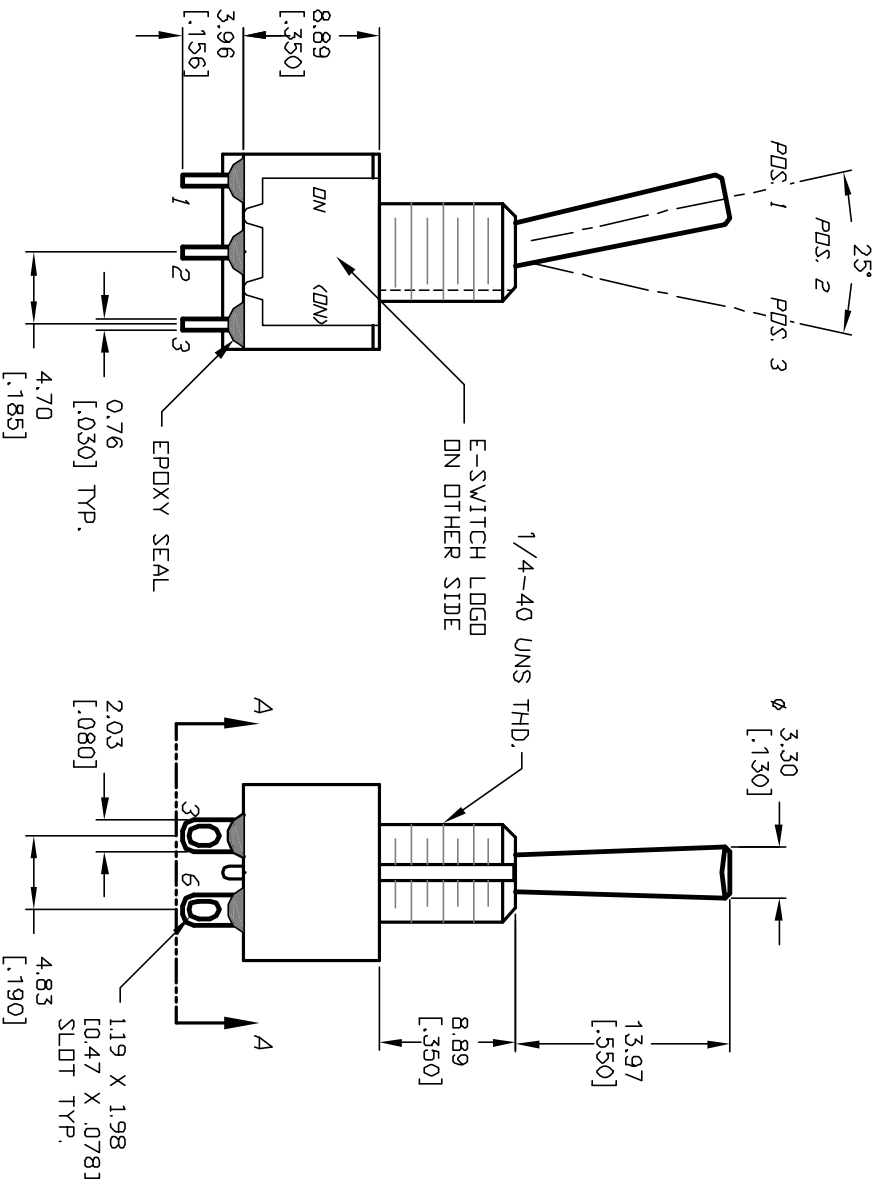

TITLE		100 DP-2 T3 B1 M1 Q E		
SCALE		2:1		
DATE		1/28/03		
DR		CJB		
DWG		T122065		
REV		A		
E-SWITCH®				
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED				
REV.	ECN No.	DESCRIPTION	DATE	CHKD
A	12769	RELEASED FOR PRODUCTION	1/28/03	CJB